


CLAMPING SYSTEMS CHECKLIST

Every press brake should have a punch holder and die holder to ensure the machine is protected and tooling can be clamped. Once your clamping solution is determined, the information below can help you gather important information to ensure proper fit.

CONTACT INFORMATION				
COMPANY NAME			CONTACT NAME	
ACCOUNT NUMBER			PHONE NUMBER	
EMAIL ADDRESS				

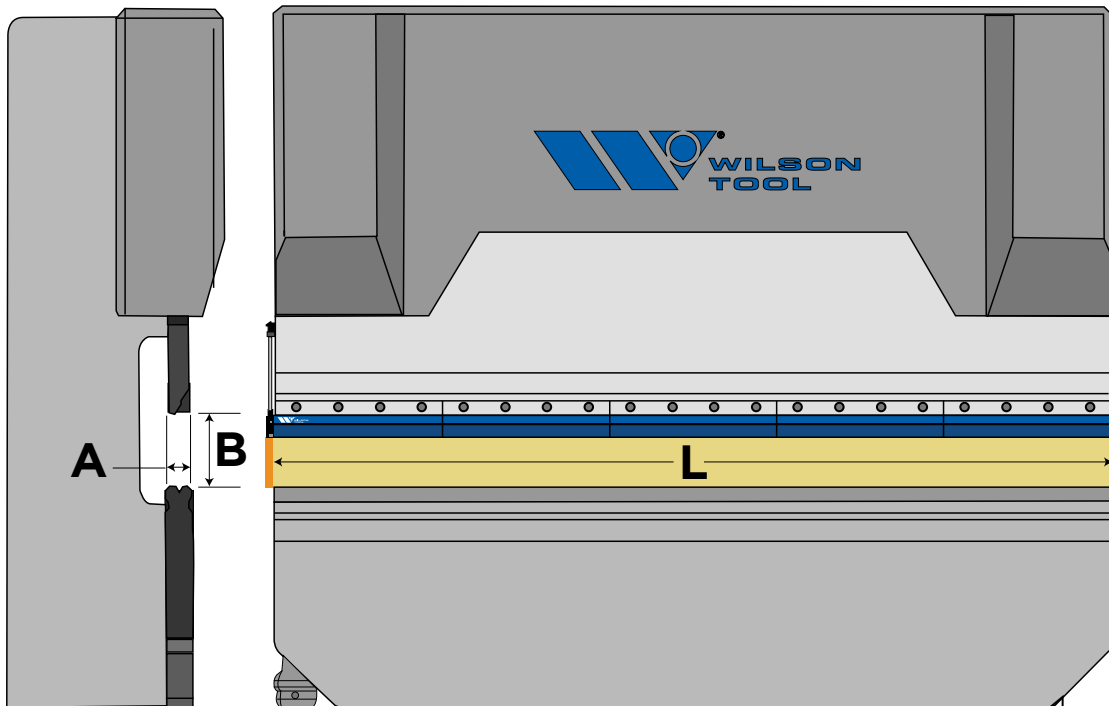


PRESS BRAKE CHARACTERISTICS	
MAKE	
MODEL	
LENGTH [L]*	
TONNAGE	
OPEN HEIGHT [B]	
STROKE	

UPPER BEAM – CONFIGURATION	
American	European Z1
European Z2	WT
UBP	Other: _____
Upper Beam Width [A]: _____	

LOWER BEAM – CONFIGURATION	
American	WT
European 60mm	European 90mm
UBP	Other: _____
Lower Beam Width [A]: _____	

*If exact beam length is critical, contact one of our Tooling Technicians.

 **Download this form to your computer. After entering your information, save the file and click here to email this form.**

© Wilson Tool International.
All rights reserved. (3.2022)