


URETHANE SOLUTIONS


Wilson Tool offers a wide range of urethane products for all of your stamping needs. In addition to the standard thicknesses and widths of the sheets, bars, rods and strippers, custom urethane is available upon request. All products are STD 95 Shore A Durometer. Alternate durometers available.

Sheets




Thickness	Width x Length
1/8"	6" x 6"
1/4"	6" x 12"
1/2"	6" x 18"
3/4"	6" x 24"
1"	12" x 12"
1-1/4"	12" x 18"
1-1/2"	12" x 24"
1-3/4"	18" x 18"
2"	18" x 24"
	24" x 24"

Bars



Thickness x Width	Length
1" x 1"	
1" x 2"	
1" x 3"	
1" x 4"	12"
2" x 2"	24"
2" x 3"	36"
2" x 4"	48"
3" x 3"	
3" x 4"	
4" x 4"	

Rods



Diameter	Length
3/16"	1-1/8"
1/4"	1-1/4"
3/8"	1-1/2"
1/2"	1-3/4"
5/8"	2"
3/4"	2-1/2"
7/8"	3"
1"	4"
	6"

Open End


[D] fits shank punch	Length [L]								[C]
	1.25"	1.50"	1.75"	2.0"	2.25"	2.5"	2.75"	3.0"	
3/16"	US1125	US1150							11/16"
1/4"	US2125	US2150	US2175	US2200					3/4"
5/16"	US3125	US3150	US3175	US3200	US3225				13/16"
3/8"	US4125	US4150	US4175	US4200	US4225				7/8"
1/2"	US5125	US5150	US5175	US5200	US5225	US5250			1"
5/8"	US6125	US6150	US6175	US6200	US6225	US6250			1-1/8"
3/4"		US7150	US7175	US7200	US7225	US7250	US7275	US7300	1-3/8"
7/8"		US8150	US8175	US8200	US8225	US8250	US8275	US8300	1-5/8"
1"		US9150	US9175	US9200	US9225	US9250	US9275	US9300	1-3/4"



URETHANE SOLUTIONS

Strippers

[I.D.]	[O.D.]	Length [L]	Cat. No.	Pressure Available at Deflection of:		
				.125	.250	.375
.187	.687	1.25	U1CE125	275	440	
		1.50	U1CE150	250	400	
.250	.750	1.25	U2CE125	310	500	
		1.50	U2CE150	300	490	
		1.75	U2CE175	250	400	520
.312	.812	1.25	U3CE125	350	540	
		1.50	U3CE150	325	475	
		1.75	U3CE175	320	450	720
		2.00	U3CE200	260	390	600
.375	.875	1.25	U4CE125	470	725	
		1.50	U4CE150	420	700	
		1.75	U4CE175	390	640	775
		2.00	U4CE200	360	580	700
.500	1.00	1.25	U5CE125	575	830	
		1.50	U5CE150	510	780	
		1.75	U5CE175	480	720	940
		2.00	U5CE200	370	560	685
		2.25	U5CE225	320	520	640
		2.50	U5CE250	300	480	600
.625	1.125	1.25	U6CE125	670	970	
		1.50	U6CE150	565	885	
		1.75	U6CE175	530	830	1040
		2.00	U6CE200	480	780	980
		2.25	U6CE225	440	720	900
.750	1.500	1.75	U7CE175	560	860	1260
		2.00	U7CE200	450	750	1100
		2.25	U7CE225	390	690	1050
		2.50	U7CE250	350	650	1000
		2.75	U7CE275	340	640	950
		3.00	U7CE300	320	510	820
.875	1.750	1.75	U8CE175	1600	2300	3500
		2.00	U8CE200	1350	2050	3000
		2.25	U8CE225	1325	2025	2700
		2.50	U8CE250	1000	1700	2100
		2.75	U8CE275	950	1650	1950
		3.00	U8CE300	850	1450	1850
1.000	2.000	1.75	U9CE175	2100	3100	3600
		2.00	U9CE200	1750	2700	3500
		2.25	U9CE225	1550	2400	3300
		2.50	U9CE250	1350	2100	3100
		2.75	U9CE275	1100	1900	2900
		3.00	U9CE300	950	1500	2400

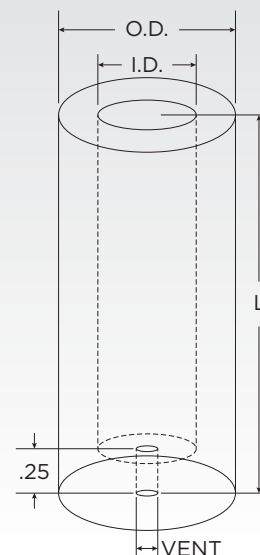

Vent Hole	I.D.
.062	.187 - .250
.093	.312
.125	.375 - 1.00

For more stamping solutions, visit us at wilsontool.com/stamping or contact our Tooling Technicians or your local Sales Engineer.

© Wilson Tool International.
All rights reserved. S459F (4.2024)



US Headquarters tel: 800.944.4671
Canada tel: 800.268.5573
Mexico tel: 001.800.741.2510

stamping@wilsontool.com
punching@wilsontoolcanada.com
estampado@wilsontool.com