


BYSTRONIC™ STYLE | Pressbrake Tooling



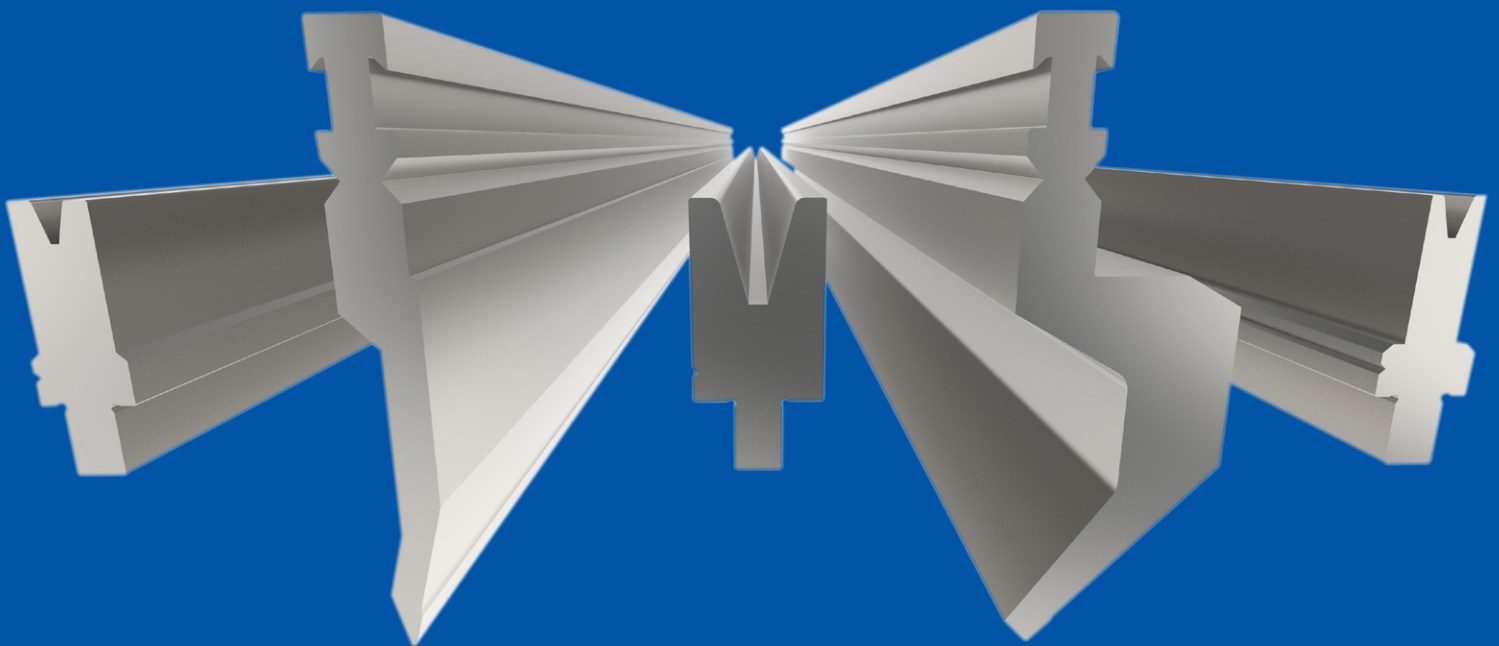

Contents

STANDARD PUNCH & DIE LENGTHS	4
------------------------------------	---

PUNCHES

R-STYLE PUNCHES 155MM	6
-----------------------------	---

RFA-STYLE PUNCHES 175MM	9
-------------------------------	---

RFA-STYLE PUNCHES 250MM	14
-------------------------------	----

DIES

30°	20
-----------	----

60° and 80°	26
-------------------	----

85° and 88°	29
-------------------	----

ADAPTORS	36
----------------	----

HEMMING

HEMMING	38
---------------	----

BEND LIMIT GRAPHS

BEND LIMIT GRAPHS	44
-------------------------	----





TECHNICAL INFORMATION

AIR BENDING FORCE CHART METRIC	68
--------------------------------------	----

NOTES	69
-------------	----




STANDARD PUNCH LENGTHS

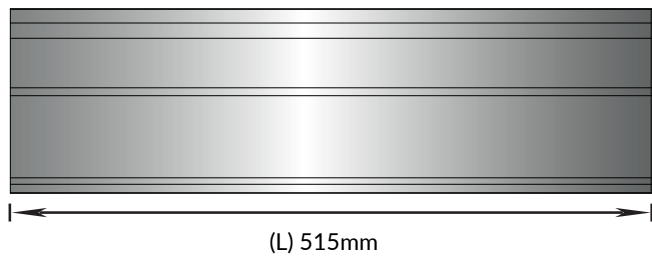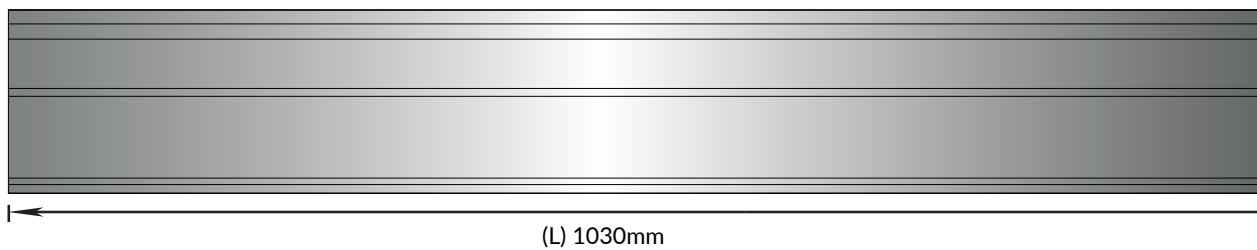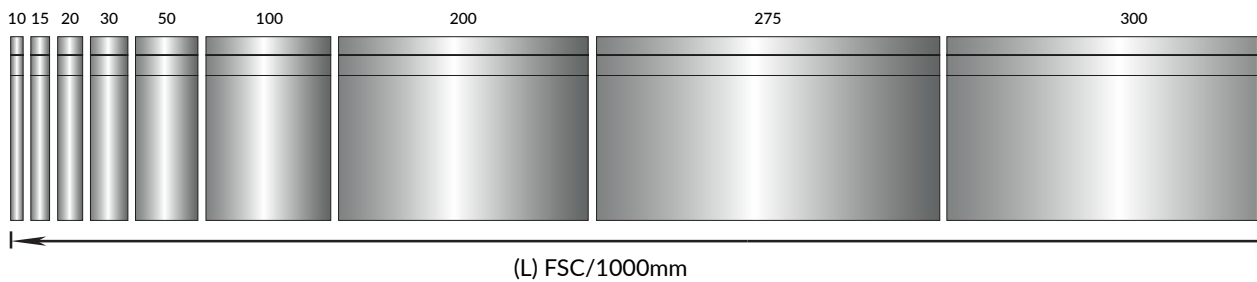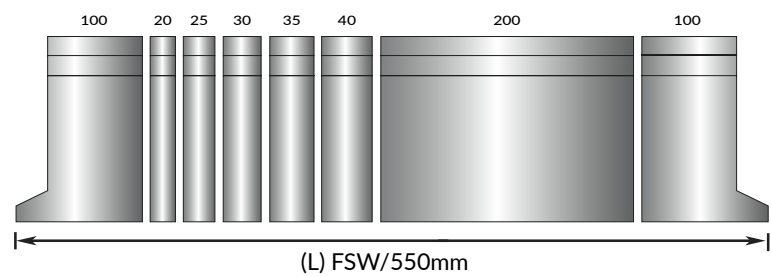

Horns


- Sold in pairs

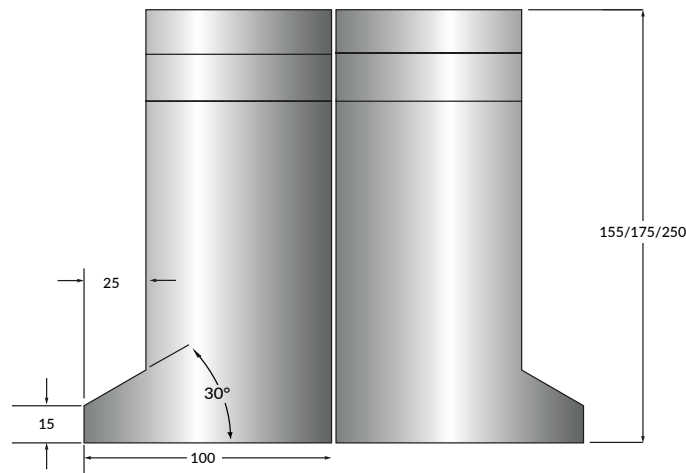



Features


- All punches made from 42CrMo4
- 550FSW sectionalised set includes 2 ear pieces (horns)
- Punches are induction hardened to 58HRC
- Minimum hardness depth on punch tip = 4mm

Bystronic R







Bystronic RFA



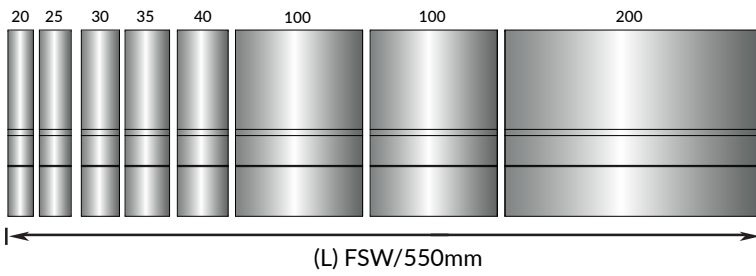


Features:


- Dies induction hardened to 58HRC on working areas
- Minimum hardness depth = 4mm
- For Nitrex contact Sales Desk
- All dies made from 42CrMo4

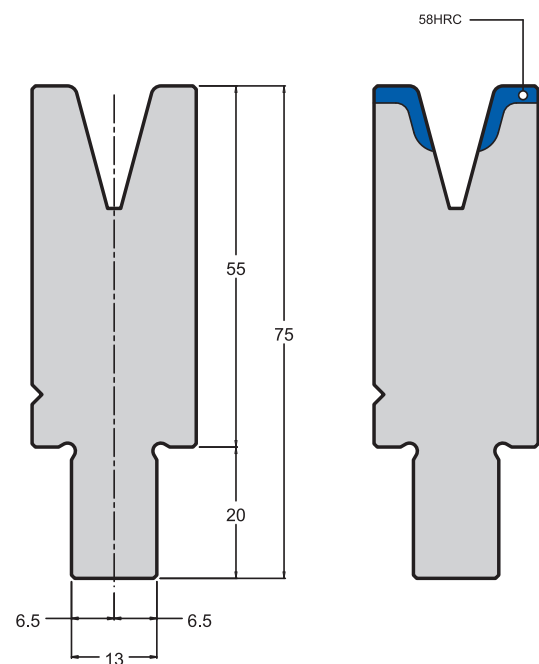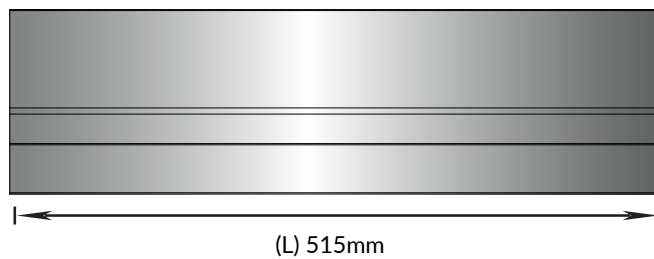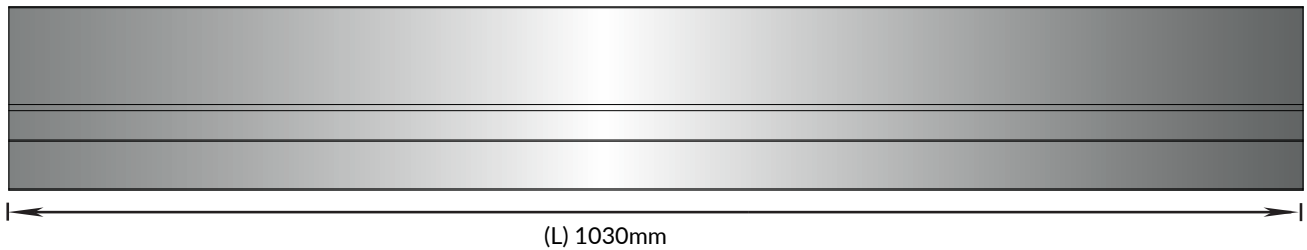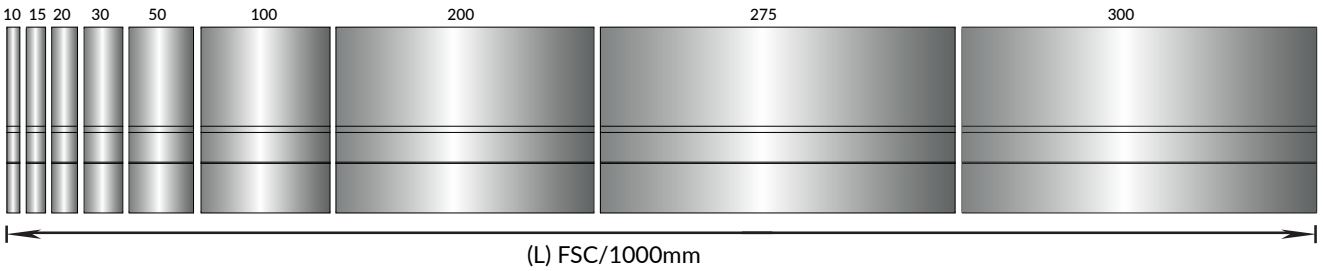


RF-STYLE PUNCHES HEIGHT 155MM

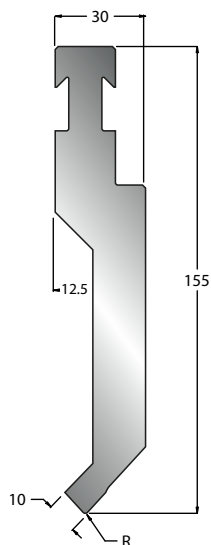


BYSTRONIC PROFILE	MAX FORCE kN/m	WEIGHT KG/M	ANGLE	RADIUS	LENGTH	PRICE
P2R	1000	21.5	85°	1.0	EB0185010-515	
					EB0185010-550FSW	
					EB0185010-1000FSC	
					EB0185010-1030	
					EB0185010-100LR	
	1000	21.6	88°	1.0	EB0188010-515	
					EB0188010-550FSW	
					EB0188010-1000FSC	
					EB0188010-1030	
					EB0188010-100LR	

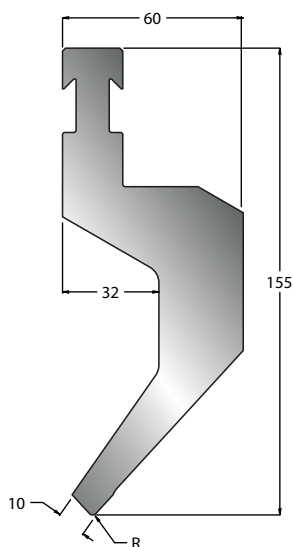


BYSTRONIC PROFILE	MAX FORCE kN/m	WEIGHT KG/M	ANGLE	RADIUS	LENGTH	PRICE
P4R	700	29.7	85°	1.5	EB0085015-515	
					EB0085015-550FSW	
					EB0085015-1000FSC	
					EB0085015-1030	
					EB0085015-100LR	
	700	29.9	88°	1.5	EB0088015-515	
					EB0088015-550FSW	
					EB0088015-1000FSC	
					EB0088015-1030	
					EB0088015-100LR	

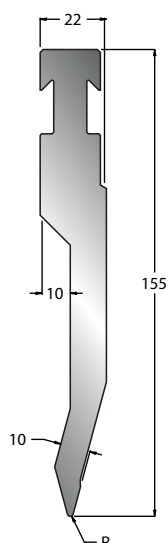


BYSTRONIC PROFILE	MAX FORCE kN/m	WEIGHT KG/M	ANGLE	RADIUS	LENGTH	PRICE
P5R	1000	16.2	30°	1.0	EB0230010-515	
					EB0230010-550FSW	
					EB0230010-1000FSC	
					EB0230010-1030	
					EB0230010-100LR	



BYSTRONIC PROFILE	MAX FORCE kN/m	WEIGHT KG/M	ANGLE	RADIUS	LENGTH	PRICE
P6R	1500	21.3	30°	1.0	EB0430010-515	
					EB0430010-550FSW	
					EB0430010-1000FSC	
					EB0430010-1030	
					EB0430010-100LR	

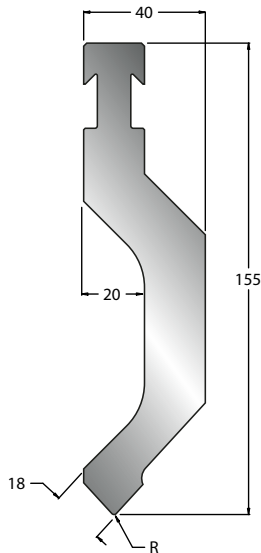




BYSTRONIC PROFILE	MAX FORCE kN/m	WEIGHT KG/M	ANGLE	RADIUS	LENGTH	PRICE
P8R	1000	23.8	85°	1.0	EB0585010-515	
					EB0585010-550FSW	
					EB0585010-1000FSC	
					EB0585010-1030	
					EB0585010-100LR	
	1000	24.0	88°	1.0	EB0588010-515	
					EB0588010-550FSW	
					EB0588010-1000FSC	
					EB0588010-1030	
					EB0588010-100LR	

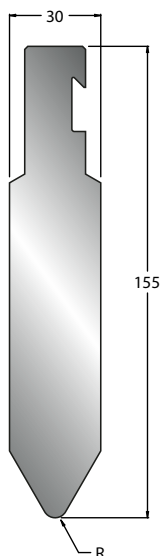

BYSTRONIC PROFILE	MAX FORCE kN/m	WEIGHT KG/M	ANGLE	RADIUS	LENGTH	PRICE
P9R	2000	30.3	60°	4.0	EB0460040-515	
					EB0460040-550FSW	
					EB0460040-1000FSC	
					EB0460040-1030	
					EB0460040-100LR	

For different Radii & Relief consult Sales Desk

RADIUS PUNCH HOLDERS & INSERTS

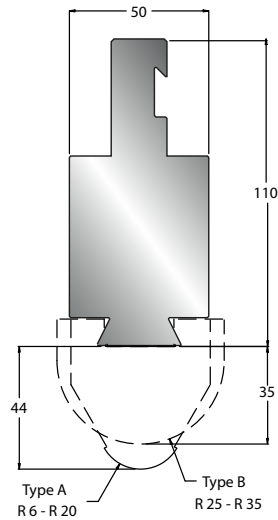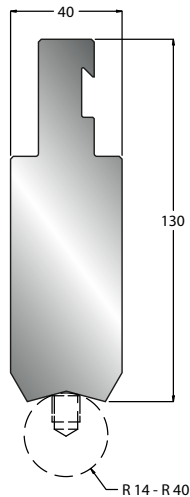


HOLDER	PRICE
EB01T40 - 515	
EB01T40 - 1030	

HOLDER	PRICE
EB02T50 - 515	
EB02T50 - 550FSW	
EB02T50 - 1000FSC	
EB02T50 - 1030	


RADIUS	LENGTH	PRICE
Flat 20	EB03F20-515	
	EB03F20-550FSW	
	EB03F20-1000FSC	
	EB03F20-1030	

RADIUS INSERT	LENGTH	PRICE
14	EBR140-515	
	EBR140-1030	
17.5	EBR175-515	
	EBR175-1030	
20	EBR200-515	
	EBR200-1030	
22.5	EBR225-515	
	EBR225-1030	
25	EBR250-515	
	EBR250-1030	
27.5	EBR275-515	
	EBR275-1030	
30	EBR300-515	
	EBR300-1030	
32.5	EBR325-515	
	EBR325-1030	
35	EBR350-515	
	EBR350-1030	
40	EBR400-515	
	EBR400-1030	

RADIUS INSERT	LENGTH	PRICE
6	EBR006DT-515	
	EBR006DT-550FSW	
	EBR006DT-1000FSC	
	EBR006DT-1030	
8	EBR008DT-515	
	EBR008DT-550FSW	
	EBR008DT-1000FSC	
	EBR008DT-1030	
10	EBR010DT-515	
	EBR010DT-550FSW	
	EBR010DT-1000FSC	
	EBR010DT-1030	
12	EBR012DT-515	
	EBR012DT-550FSW	
	EBR012DT-1000FSC	
	EBR012DT-1030	
15	EBR015DT-515	
	EBR015DT-550FSW	
	EBR015DT-1000FSC	
	EBR015DT-1030	
20	EBR200DT-515	
	EBR200DT-550FSW	
	EBR200DT-1000FSC	
	EBR200DT-1030	
25	EBR250DT-515	
	EBR250DT-550FSW	
	EBR250DT-1000FSC	
	EBR250DT-1030	
30	EBR300DT-515	
	EBR300DT-550FSW	
	EBR300DT-1000FSC	
	EBR300DT-1030	
35	EBR350DT-515	
	EBR350DT-550FSW	
	EBR350DT-1000FSC	
	EBR350DT-1030	

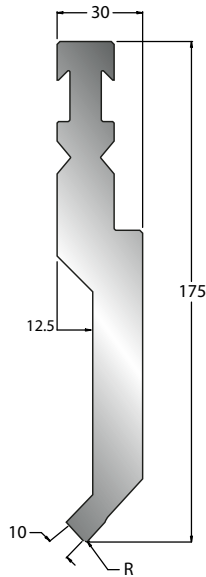

BYSTRONIC PROFILE	MAX FORCE kN/m	WEIGHT KG/M	ANGLE	RADIUS	LENGTH	PRICE
P2RFA	850	24.0	85°	0.5	EB1185005-515	
					EB1185005-550FSW	
					EB1185005-1000FSC	
					EB1185005-1030	
					EB1185005-100LR	
	1000	24.0	85°	1.0	EB1185010-515	
					EB1185010-550FSW	
					EB1185010-1000FSC	
					EB1185010-1030	
					EB1185010-100LR	
	850	24.0	88°	0.5	EB1188005-515	
					EB1188005-550FSW	
					EB1188005-1000FSC	
					EB1188005-1030	
	1000	24.0	88°	1.0	EB1188010-515	
					EB1188010-550FSW	
					EB1188010-1000FSC	
					EB1188010-1030	
					EB1188010-100LR	

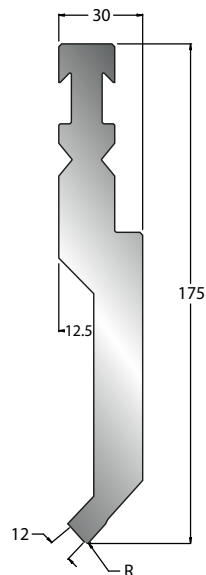


BYSTRONIC PROFILE	MAX FORCE kN/m	WEIGHT KG/M	ANGLE	RADIUS	LENGTH	PRICE
P3RFA	1300	24.0	85°	1.0	EB1785010-515	
					EB1785010-550FSW	
					EB1785010-1000FSC	
					EB1785010-1030	
	1100	24.0	85°	3.0	EB1785010-100LR	
					EB1785030-515	
					EB1785030-550FSW	
					EB1785030-1000FSC	
					EB1785030-1030	
					EB1785030-100LR	
	1400	24.0	88°	1.0	EB1788010-515	
					EB1788010-550FSW	
					EB1788010-1000FSC	
					EB1788010-1030	
	1000	24.0	88°	3.0	EB1788010-100LR	
					EB1788030-515	
					EB1788030-550FSW	
					EB1788030-1000FSC	
					EB1788030-1030	
					EB1788030-100LR	


For different Radii & Relief consult Sales Desk



RFA-STYLE PUNCHES HEIGHT 175MM

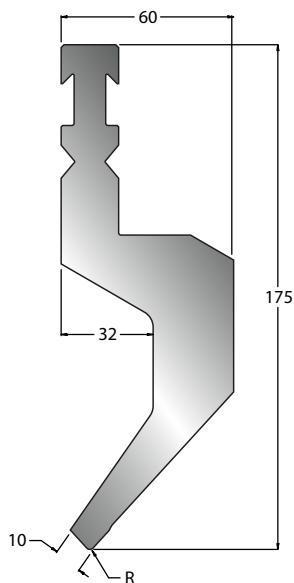


BYSTRONIC PROFILE	MAX FORCE kN/m	WEIGHT KG/M	ANGLE	RADIUS	LENGTH	PRICE
P4RFA	550	32.0	85°	0.5	EB1085005-515	
					EB1085005-550FSW	
					EB1085005-1000FSC	
					EB1085005-1030	
					EB1085005-100LR	
	600			1.0	EB1085010-515	
					EB1085010-550FSW	
					EB1085010-1000FSC	
					EB1085010-1030	
					EB1085010-100LR	
	700	1.5	EB1085015-515			
			EB1085015-550FSW			
			EB1085015-1000FSC			
			EB1085015-1030			
			EB1085015-100LR			
	600	3.0	EB1085030-515			
			EB1085030-550FSW			
			EB1085030-1000FSC			
			EB1085030-1030			
			EB1085030-100LR			
P4RFA	550	32.0	88°	0.5	EB1088005-515	
					EB1088005-550FSW	
					EB1088005-1000FSC	
					EB1088005-1030	
					EB1088005-100LR	
	600			1.0	EB1088010-515	
					EB1088010-550FSW	
					EB1088010-1000FSC	
					EB108801-1030	
					EB1088010-100LR	
	700	1.5	EB1088015-515			
			EB1088015-550FSW			
			EB1088015-1000FSC			
			EB1088015-1030			
			EB1088015-100LR			
700	3.0	EB1088030-515				
		EB1088030-550FSW				
		EB1088030-1000FSC				
		EB1088030-1030				
		EB1088030-100LR				




BYSTRONIC PROFILE	MAX FORCE kN/m	WEIGHT KG/M	ANGLE	RADIUS	LENGTH	PRICE
P5RFA	700	19.0	30°	0.5	EB1230005-515	
					EB1230005-550FSW	
					EB1230005-1000FSC	
					EB1230005-1030	
					EB1230005-100LR	
	1000			1.0	EB1230010-515	
					EB1230010-550FSW	
					EB1230010-1000FSC	
					EB1230010-1030	
					EB1230010-100LR	
	1000			1.5	EB1230015-515	
					EB1230015-550FSW	
					EB1230015-1000FSC	
					EB1230015-1030	
					EB1230015-100LR	
	1000			3.0	EB1230030-515	
EB1230030-550FSW						
EB1230030-1000FSC						
EB1230030-1030						
EB1230030-100LR						

For different Radii & Relief consult Sales Desk



BYSTRONIC PROFILE	MAX FORCE kN/m	WEIGHT KG/M	ANGLE	RADIUS	LENGTH	PRICE
P6RFA	1500	23.3	30°	1.0	EB1430010-515	
					EB1430010-550FSW	
					EB1430010-1000FSC	
					EB1430010-1030	
					EB1430010-100LR	




* Width 25 for Radius 12.0


BYSTRONIC PROFILE	MAX FORCE kN/m	WEIGHT KG/M	ANGLE	RADIUS	LENGTH	PRICE
P7RFA	1600	30.0	30°	3.0	EB1630030-515	
					EB1630030-550FSW	
					EB1630030-1000FSC	
					EB1630030-1030	
					EB1630030-100LR	
				5.0	EB1630050-515	
					EB1630050-550FSW	
					EB1630050-1000FSC	
					EB1630050-1030	
					EB1630050-100LR	
				6.0	EB1630060-515	
					EB1630060-550FSW	
					EB1630060-1000FSC	
					EB1630060-1030	
					EB1630060-100LR	
				8.0	EB1630080-515	
					EB1630080-550FSW	
					EB1630080-1000FSC	
					EB1630080-1030	
					EB1630080-100LR	
				10.0	EB1630100-515	
					EB1630100-550FSW	
					EB1630100-1000FSC	
					EB1630100-1030	
					EB1630100-100LR	
				12.0	EB1630120-515	
					EB1630120-550FSW	
					EB1630120-1000FSC	
					EB1630120-1030	
					EB1630120-100LR	

For different Radii & Relief consult Sales Desk

RFA-STYLE PUNCHES HEIGHT 175MM



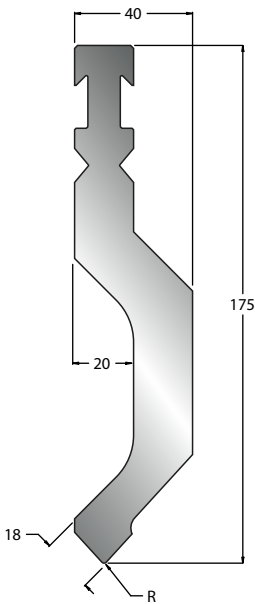


BYSTRONIC PROFILE	MAX FORCE kN/m	WEIGHT KG/M	ANGLE	RADIUS	LENGTH	PRICE
P8RFA	1000	27.2	85°	1.0	EB1585010-515	
					EB1585010-550FSW	
					EB1585010-1000FSC	
					EB1585010-1030	
					EB1585010-100LR	
	1000	27.2	88°	1.0	EB1588010-515	
					EB1588010-550FSW	
					EB1588010-1000FSC	
					EB1588010-1030	
					EB1588010-100LR	

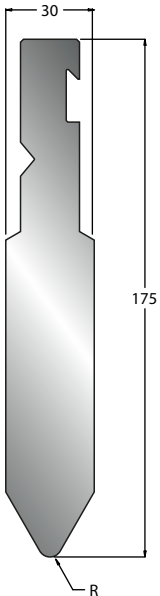

BYSTRONIC PROFILE	MAX FORCE kN/m	WEIGHT KG/M	ANGLE	RADIUS	LENGTH	PRICE
P9RFA	1600	33.5	60°	4.0	EB1460040-515	
					EB1460040-550FSW	
					EB1460040-1000FSC	
					EB1460040-1030	
					EB1460040-100LR	



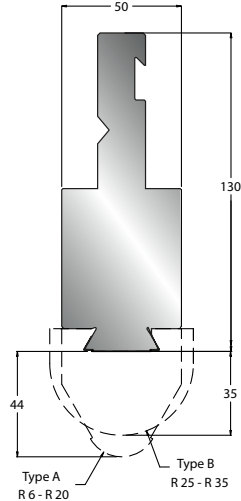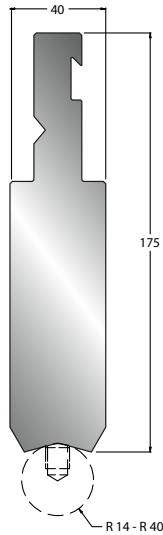

HOLDER	PRICE
EB11T40 - 515	
EB11T40 - 1030	

HOLDER	PRICE
EB12T50 - 515	
EB12T50 - 550FSW	
EB12T50 - 1000FSC	
EB12T50 - 1030	

RADIUS	LENGTH	PRICE
Flat 20	EB13F20-515	
	EB13F20550FSW	
	EB13F20-1000FSC	
	EB13F20-1030	


RADIUS INSERT	LENGTH	PRICE
14	EBR140-515	
	EBR140-1030	
17.5	EBR175-515	
	EBR175-1030	
20	EBR200-515	
	EBR200-1030	
22.5	EBR225-515	
	EBR225-1030	
25	EBR250-515	
	EBR250-1030	
27.5	EBR275-515	
	EBR275-1030	
30	EBR300-515	
	EBR300-1030	
32.5	EBR325-515	
	EBR325-1030	
35	EBR350-515	
	EBR350-1030	
40	EBR400-515	
	EBR400-1030	

RADIUS INSERT	LENGTH	PRICE
6	EBR006DT-515	
	EBR006DT-550FSW	
	EBR006DT-1000FSC	
	EBR006DT-1030	
8	EBR008DT-515	
	EBR008DT-550FSW	
	EBR008DT-1000FSC	
	EBR008DT-1030	
10	EBR010DT-515	
	EBR010DT-550FSW	
	EBR010DT-1000FSC	
	EBR010DT-1030	
12	EBR012DT-515	
	EBR012DT-550FSW	
	EBR012DT-1000FSC	
	EBR012DT-1030	
15	EBR015DT-515	
	EBR015DT-550FSW	
	EBR015DT-1000FSC	
	EBR015DT-1030	
20	EBR200DT-515	
	EBR200DT-550FSW	
	EBR200DT-1000FSC	
	EBR200DT-1030	
25	EBR250DT-515	
	EBR250DT-550FSW	
	EBR250DT-1000FSC	
	EBR250DT-1030	
30	EBR300DT-515	
	EBR300DT-550FSW	
	EBR300DT-1000FSC	
	EBR300DT-1030	
35	EBR350DT-515	
	EBR350DT-550FSW	
	EBR350DT-1000FSC	
	EBR350DT-1030	


For different Radii & Relief consult Sales Desk



RFA-STYLE PUNCHES HEIGHT 250MM




BYSTRONIC PROFILE	MAX FORCE kN/mE	WEIGHT KG/M	ANGLE	RADIUS	LENGTH	PRICE
P2RFA	850	34.4	85°	0.5	EB2185005-515	
					EB2185005-550FSW	
					EB2185005-1000FSC	
					EB2185005-1030	
					EB2185005-100LR	
	1000	34.4	85°	1.0	EB2185010-515	
					EB2185010-550FSW	
					EB2185010-1000FSC	
					EB2185010-1030	
					EB2185010-100LR	
	850	34.4	88°	0.5	EB2188005-515	
					EB2188005-550FSW	
					EB2188005-1000FSC	
					EB2188005-1030	
					EB2188005-100LR	
	1000	34.4	88°	1.0	EB2188010-515	
					EB2188010-550FSW	
					EB2188010-1000FSC	
					EB2188010-1030	
					EB2188010-100LR	

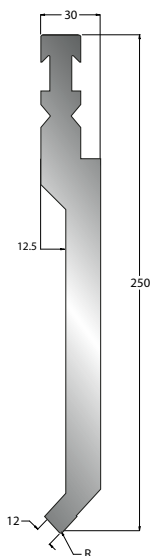


BYSTRONIC PROFILE	MAX FORCE kN/m	WEIGHT KG/M	ANGLE	RADIUS	LENGTH	PRICE
P3RFA	1400	34.6	85°	1.0	EB2785010-515	
					EB2785010-550FSW	
					EB2785010-1000FSC	
					EB2785010-1030	
					EB2785010-100LR	
	1000	34.6	85°	3.0	EB2785030-515	
					EB2785030-550FSW	
					EB2785030-1000FSC	
					EB2785030-1030	
					EB2785030-100LR	
	1400	34.6	88°	1.0	EB2788010-515	
					EB2788010-550FSW	
					EB2788010-1000FSC	
					EB2788010-1030	
					EB2788010-100LR	
	1000	34.6	88°	3.0	EB2788030-515	
					EB2788030-550FSW	
					EB2788030-1000FSW	
					EB2788030-1030	
					EB2788030-100LR	

For different Radii & Relief consult Sales Desk

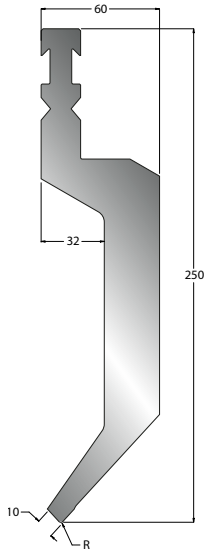

BYSTRONIC PROFILE	MAX FORCE kN/m	WEIGHT KG/M	ANGLE	RADIUS	LENGTH	PRICE
P4RFA	550	48.0	85°	0.5	EB2085005-515	
					EB2085005-550FSW	
					EB2085005-1000FSC	
					EB2085005-1030	
					EB2085005-100LR	
	600			1.0	EB2085010-515	
					EB2085010-550FSW	
					EB2085010-1000FSC	
					EB2085010-1030	
					EB2085010-100LR	
	600			1.5	EB2085015-515	
					EB2085015-550FSW	
					EB2085015-1000FSC	
					EB2085015-1030	
					EB2085015-100LR	
	600			3.0	EB2085030-515	
					EB2085030-550FSW	
					EB2085030-1000FSC	
					EB2085030-1030	
					EB2085030-100LR	
P4RFA	550	48.0	88°	0.5	EB2088005-515	
					EB2088005-550FSW	
					EB2088005-1000FSC	
					EB2088005-1030	
					EB2088005-100LR	
	600			1.0	EB2088010-515	
					EB2088010-550FSW	
					EB2088010-1000FSC	
					EB2088010-1030	
					EB2088010-100LR	
	600			1.5	EB2088015-515	
					EB2088015-550FSW	
					EB2088015-1000FSC	
					EB2088015-1030	
					EB2088015-100LR	
	600			3.0	EB2088030-515	
					EB2088030-550FSW	
					EB2088030-1000FSC	
					EB2088030-1030	
					EB2088030-100LR	




BYSTRONIC PROFILE	MAX FORCE kN/m	WEIGHT KG/M	ANGLE	RADIUS	LENGTH	PRICE
P5RFA	700	26.0	30°	0.5	EB2230005-515	
					EB2230005-550FSW	
					EB2230005-1000FSC	
					EB2230005-1030	
					EB2230005-100LR	
	750			1.0	EB2230010-515	
					EB2230010-550FSW	
					EB2230010-1000FSC	
					EB2230010-1030	
					EB2230010-100LR	
	1000			1.5	EB2230015-515	
					EB2230015-550FSW	
					EB2230015-1000FSC	
					EB2230015-1030	
					EB2230015-100LR	
	1000			3.0	EB2230030-515	
					EB2230030-550FSW	
					EB2230030-1000FSC	
					EB2230030-1030	
					EB2230030-100LR	


For different Radii & Relief consult Sales Desk



RFA-STYLE PUNCHES HEIGHT 250MM




BYSTRONIC PROFILE	MAX FORCE kN/m	WEIGHT KG/M	ANGLE	RADIUS	LENGTH	PRICE
P6RFA	1400	35.0	30°	1.0	EB2430010-515	
					EB2430010-550FSW	
					EB2430010-1000FSC	
					EB2430010-1030	
					EB2430010-100LR	




* Width 25 for Radius 12.0

BYSTRONIC PROFILE	MAX FORCE kN/m	WEIGHT KG/M	ANGLE	RADIUS	LENGTH	PRICE
P7RFA	1600	44.0	30°	3.0	EB2630030-515	
					EB2630030-550FSW	
					EB2630030-1000FSC	
					EB2630030-1030	
	1400			5.0	EB2630030-100LR	
					EB2630050-515	
					EB2630050-550FSW	
					EB2630050-1000FSC	
	1400			6.0	EB2630050-1030	
					EB2630050-100LR	
					EB2630060-515	
					EB2630060-550FSW	
	1400			8.0	EB2630060-1000FSC	
					EB2630060-1030	
					EB2630060-100LR	
					EB2630080-515	
	1600			10.0	EB2630080-550FSW	
					EB2630080-1000FSC	
					EB2630080-1030	
					EB2630080-100LR	
1600	12.0	EB2630100-515				
		EB2630100-550FSW				
		EB2630100-1000FSC				
		EB2630100-1030				
1600	12.0	EB2630100-100LR				
		EB2630120-515				
		EB2630120-550FSW				
		EB2630120-1000FSC				
1600	12.0	EB2630120-1030				
		EB2630120-100LR				



BYSTRONIC PROFILE	MAX FORCE kN/m	WEIGHT KG/M	ANGLE	RADIUS	LENGTH	PRICE
P8RFA	1000	38.3	85°	1.0	EB2585010-515	
					EB2585010-550FSW	
					EB2585010-1000FSC	
					EB2585010-1030	
					EB2585010-100LR	




BYSTRONIC PROFILE	MAX FORCE kN/m	WEIGHT KG/M	ANGLE	RADIUS	LENGTH	PRICE
P9RFA	1600	51.0	60°	4.0	EB2460040-515	
					EB2460040-550FSW	
					EB2460040-1000FSC	
					EB2460040-1030	
					EB2460040-100LR	


For different Radii & Relief consult Sales Desk



RADIUS PUNCH HOLDERS & INSERTS



HOLDER	PRICE
EB21T40 - 515	
EB21T40 - 1030	







RADIUS	LENGTH	PRICE
Flat 20	EB23F20-515	
	EB23F20-550FSW	
	EB23F20-1000FSC	
	EB23F201-1030	

RADIUS INSERT	LENGTH	PRICE
14	EBR140-515	
	EBR140-1030	
17.5	EBR175-515	
	EBR175-1030	
20	EBR200-515	
	EBR200-1030	
22.5	EBR225-515	
	EBR225-1030	
25	EBR250-515	
	EBR250-1030	
27.5	EBR275-515	
	EBR275-1030	
30	EBR300-515	
	EBR300-1030	
32.5	EBR325-515	
	EBR325-1030	
35	EBR350-515	
	EBR350-1030	
40	EBR400-515	
	EBR400-1030	


BYSTRONIC™ STYLE | Dies 30°, 60° & 80°



DIES ANGLE 30°

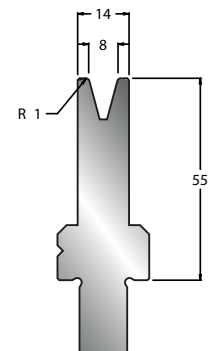
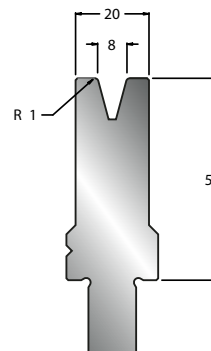
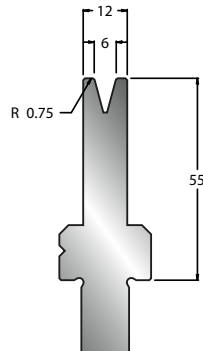
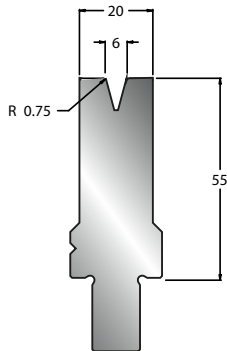


BYSTRONIC PROFILE	HEIGHT mm	MAX FORCE kN/m	WEIGHT KG/M	V OPENING	WIDTH	RADIUS	LENGTH	PRICE
V6	55	30°-400 90°-1000	10.9	6	20	0.75	EB5030006-515 EB5030006-550FSW EB5030006-1000FSC EB5030006-1030	
V6S		30°-100 90°-400	8.1	6	12	0.75	EB5130006-515 EB5130006-550FSW EB5130006-1000FSC EB5130006-1030	
V8		30°-300 90°-1000	10.8	8	20	1	EB5030008-515 EB5030008-550FSW EB5030008-1000FSC EB5030008-1030	
V8S		30°-400 90°-1000	8.7	8	14	1	EB5130008-515 EB5130008-550FSW EB5130008-1000FSC EB5130008-1030	

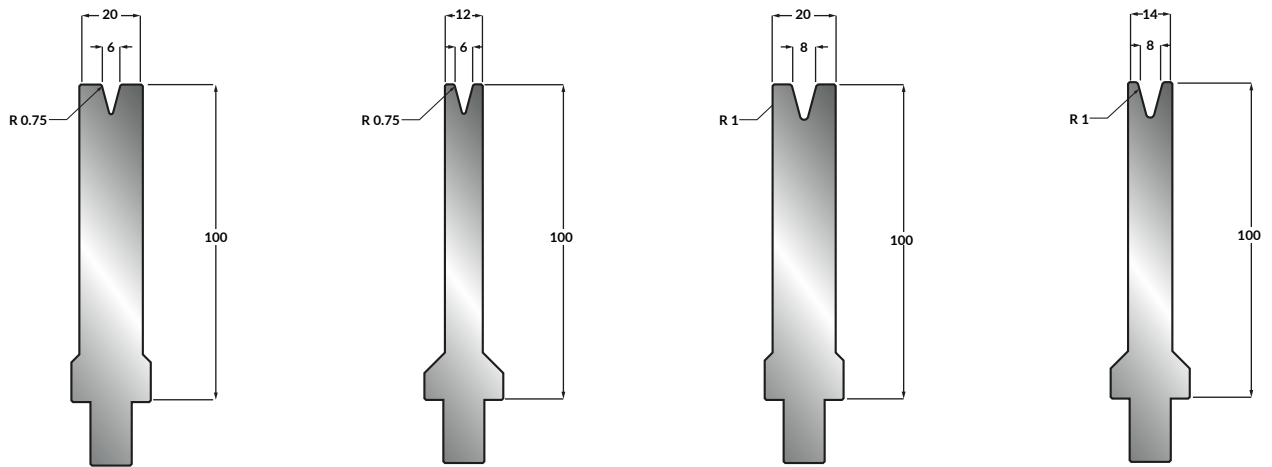


BYSTRONIC PROFILE	HEIGHT mm	MAX FORCE kN/m	WEIGHT KG/M	V OPENING	WIDTH	RADIUS	LENGTH	PRICE
V6	100	30°-280 90°-800	18	6	20	0.75	EB6030006-515 EB6030006-550FSW EB6030006-1000FSC EB6030006-1030	
V6S		30°-110 90°-400	12.3	6	12	0.75	EB6130006-515 EB6130006-550FSW EB6130006-1000FSC EB6130006-1030	
V8		30°-300 90°-1000	17.8	8	20	1	EB6030008-515 EB6030008-550FSW EB6030008-1000FSC EB6030008-1030	
V8S		30°-110 90°-400	13.7	8	14	1	EB6130008-515 EB6130008-550FSW EB6130008-1000FSC EB6130008-1030	

DIES ANGLE 30°

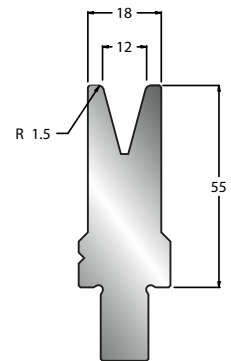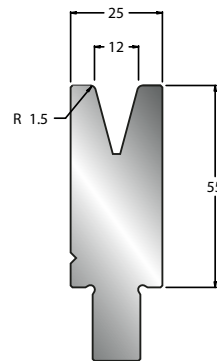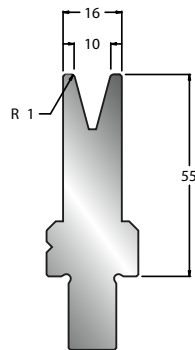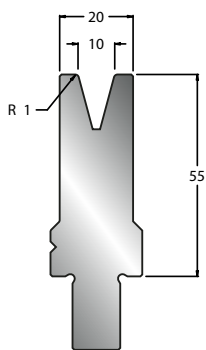


*Width used to be 20mm

BYSTRONIC PROFILE	HEIGHT mm	MAX FORCE kN/m	WEIGHT KG/M	V OPENING	WIDTH	RADIUS	LENGTH	PRICE
V10	55	30°-200 90°-900	10.6	10	20	1	EB5030010-515 EB5030010-550FSW EB5030010-1000FSC EB5030010-1030	
V10S		30°-100 90°-400	9.1	10	16	1	EB5130010-515 EB5130010-550FSW EB5130010-1000FSC EB5130010-1030	
V12		30°-250 90°-850	11.8	12	25	1.5	EB5030012-515 EB5030012-550FSW EB5030012-1000FSC EB5030012-1030	
V12S		30°-100 90°-400	11.8	12	18*	1.5	EB5130012-515 EB5130012-550FSW EB5130012-1000FSC EB5130012-1030	

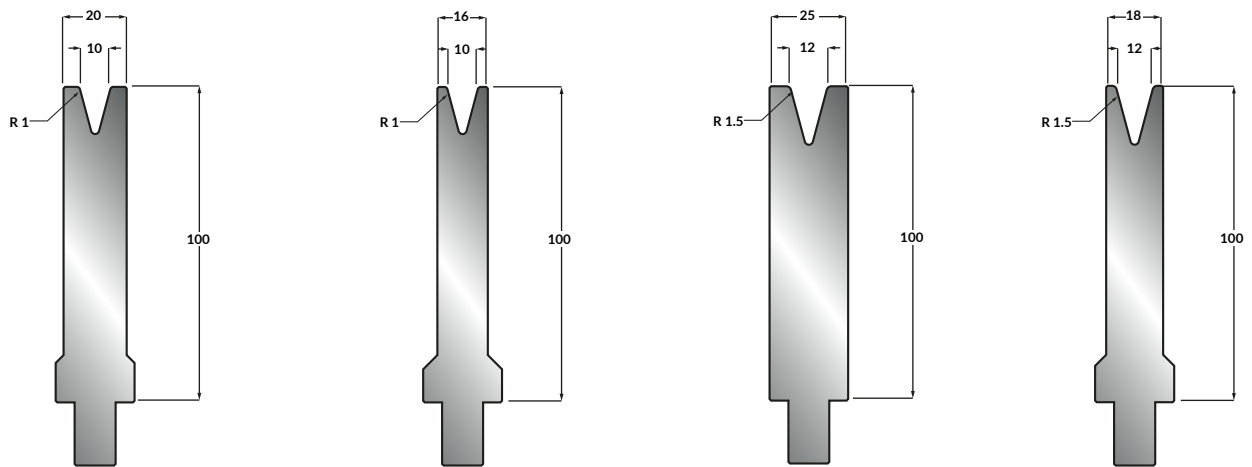


BYSTRONIC PROFILE	HEIGHT mm	MAX FORCE kN/m	WEIGHT KG/M	V OPENING	WIDTH	RADIUS	LENGTH	PRICE
V10	100	30°-200 90°-700	17.6	10	20	1	EB6030010-515	
							EB6030010-550FSW	
							EB6030010-1000FSC	
							EB6030010-1030	
V10S		30°-100 90°-350	14.7	10	16	1	EB6130010-515	
							EB6130010-550FSW	
							EB6130010-1000FSC	
							EB6130010-1030	
V12		30°-250 90°-900	20.6	12	25	1.5	EB6030012-515	
							EB6030012-550FSW	
							EB6030012-1000FSC	
							EB6030012-1030	
V12S		30°-100 90°-350	15.9	12	18	1.5	EB6130012-515	
							EB6130012-550FSW	
							EB6130012-1000FSC	
							EB6130012-1030	

DIES ANGLE 30°

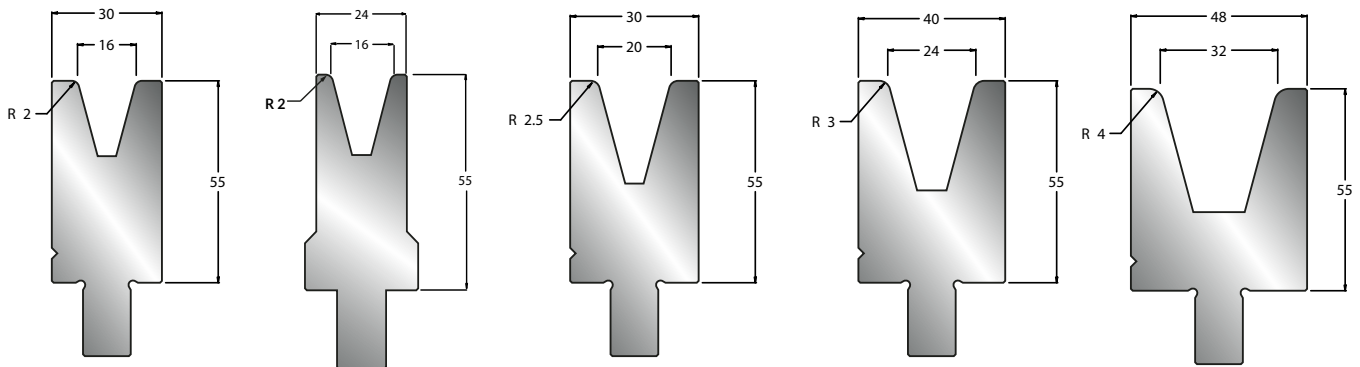



*Width used to be 35mm

BYSTRONIC PROFILE	HEIGHT mm	MAX FORCE kN/m	WEIGHT KG/M	V OPENING	WIDTH	RADIUS	LENGTH	PRICE
V16	55	30°-250 90°-1000	13.3	16	30	2	EB5030016-515 EB5030016-550FSW EB5030016-1000FSC EB5030016-1030	
V16S		30°-150 90°-500	11.3	16	24	2	EB5130016-515 EB5130016-550FSW EB5130016-1000FSC EB5130016-1030	
V20		30°-180 90°-600	12.2	20	30*	2.5	EB5030020-515 EB5030020-550FSW EB5030020-1000FSC EB5030020-1030	
V24		30°-300 90°-1100	15.5	24	40	3	EB5030024-515 EB5030024-550FSW EB5030024-1000FSC EB5030024-1030	
V32		30°-300 90°-1100	16.7	32	48	4	EB5030032-515 EB5030032-550FSW EB5030032-1000FSC EB5030032-1030	


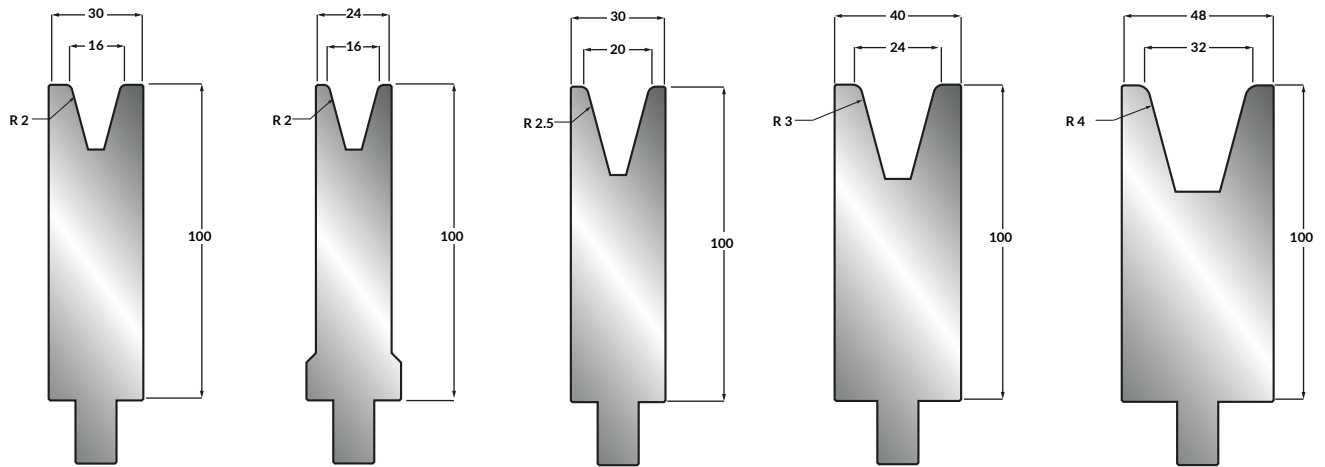


BYSTRONIC PROFILE	HEIGHT mm	MAX FORCE kN/m	WEIGHT KG/M	V OPENING	WIDTH	RADIUS	LENGTH	PRICE
V16	100	30°-300 90°-1000	23.9	16	30	2	EB6030016-515 EB6030016-550FSW EB6030016-1000FSC EB6030016-1030	
V16S		30°-150 90°-500	19.8	16	24	2	EB6130016-515 EB6130016-550FSW EB6130016-1000FSC EB6130016-1030	
V20		30°-180 90°-600	22.8	20	30	2.5	EB6030020-515 EB6030020-550FSW EB6030020-1000FSC EB6030020-1030	
V24		30°-330 90°-1100	29.6	24	40	3	EB6030024-515 EB6030024-550FSW EB6030024-1000FSC EB6030024-1030	
V32		30°-340 90°-1100	33.7	32	48	4	EB6030032-515 EB6030032-550FSW EB6030032-1000FSC EB6030032-1030	



DIES ANGLE 60° & 80°

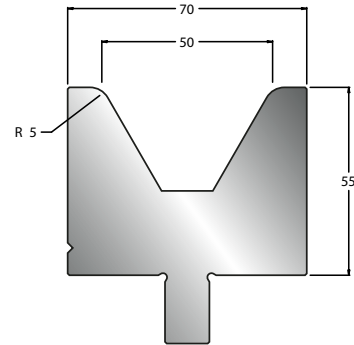



BYSTRONIC PROFILE	HEIGHT mm	MAX FORCE kN/m	WEIGHT KG/M	V OPENING	WIDTH	ANGLE	RADIUS	LENGTH	PRICE
V40	55	30°-1100 90°-1800	20.5	40	55	60°	5	EB5060040-515 EB5060040-550FSW EB5060040-1000FSC EB5060040-1030	
V50		30°-1100 90°-1800	24.5	50	70		5	EB5060050-515 EB5060050-550FSW EB5060050-1000FSC EB5060050-1030	

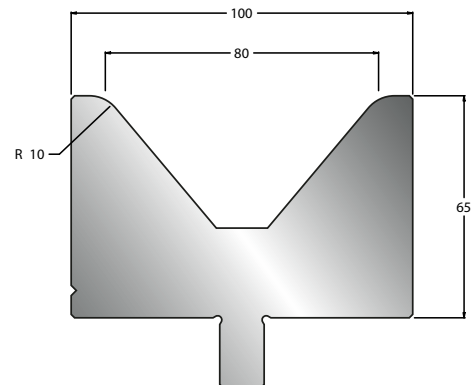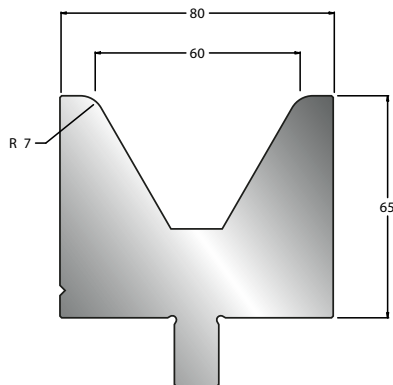

BYSTRONIC PROFILE	HEIGHT mm	MAX FORCE kN/m	WEIGHT KG/M	V OPENING	WIDTH	ANGLE	RADIUS	LENGTH	PRICE
V60	65	60°-900 90°-1600	31.4	60	80	60°	7	EB5060060-515 EB5060060-550FSW EB5060060-1000FSC EB5060060-1030	
V80		80°-1400 90°-1600	38.6	80	100	80°	10	EB5080080-515 EB5080080-550FSW EB5080080-1000FSC EB5080080-1030	

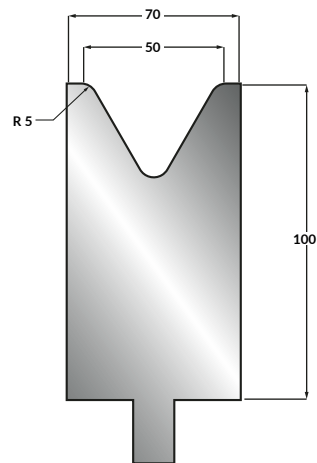
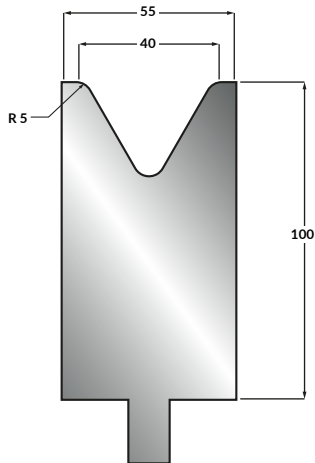


BYSTRONIC PROFILE	HEIGHT mm	MAX FORCE kN/m	WEIGHT KG/M	V OPENING	WIDTH	ANGLE	RADIUS	LENGTH	PRICE
V40	100	60°-1100 90°-2000	39.9	40	55	60°	5	EB6060040-515 EB6060040-550FSW EB6060040-1000FSC EB6060040-1030	
V50		60°-1100 90°-2000	49.2	50	70		5	EB6060050-515 EB6060050-550FSW EB6060050-1000FSC EB6060050-1030	

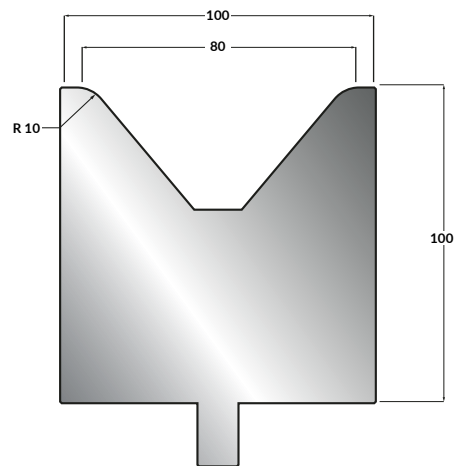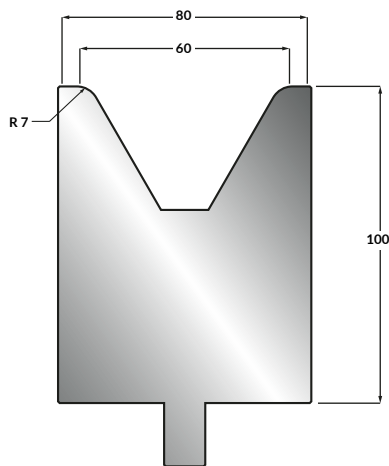

BYSTRONIC PROFILE	HEIGHT mm	MAX FORCE kN/m	WEIGHT KG/M	V OPENING	WIDTH	ANGLE	RADIUS	LENGTH	PRICE
V60	100	60°-1000 90°-1600	53.4	60	80	60°	7	EB6060060-515 EB6060060-550FSW EB6060060-1000FSC EB6060060-1030	
V80		90°-2800	66.0	80	100	80°	10	EB6080080-515 EB6080080-550FSW EB6080080-1000FSC EB6080080-1030	

DIES ANGLE 80°

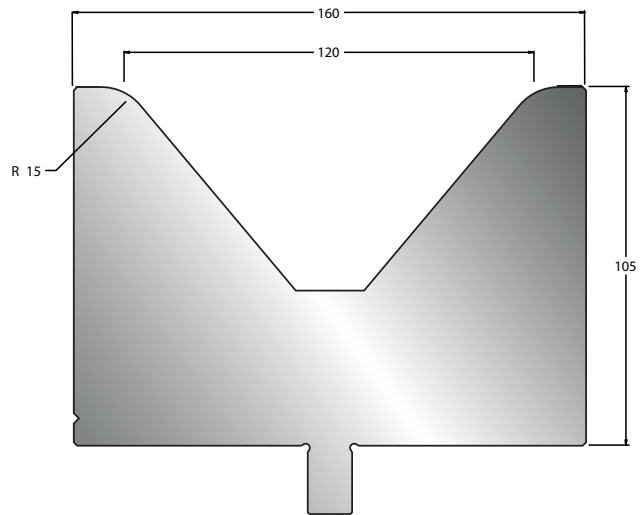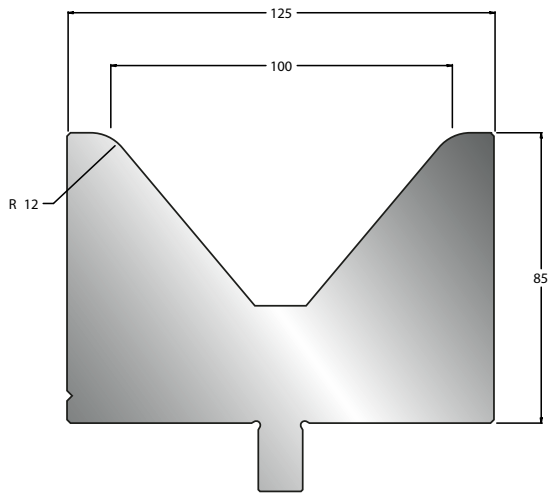





*Width used to be 150mm

BYSTRONIC PROFILE	HEIGHT mm	MAX FORCE kN/m	WEIGHT KG/M	V OPENING	WIDTH	RADIUS	LENGTH	PRICE
V100	85	80°-1800 90°-2000	62.5	100	125	12	EB5080100-515	
							EB5080100-550FSW	
							EB5080100-1000FSC	
							EB5080100-1030	
V120	105	80°-2200 90°-2400	101.0	120	160*	15	EB5080120-515	
							EB5080120-550FSW	
							EB5080120-1000FSC	
							EB5080120-1030	


BYSTRONIC™ STYLE | Dies 85° & 88°



DIES ANGLE 85° & 88°



BYSTRONIC PROFILE	HEIGHT mm	MAX FORCE kN/m	WEIGHT KG/M	V OPENING	WIDTH	RADIUS	ANGLE	LENGTH	PRICE
V6	55	90°-1000	8.3	6	20	0.75	85°	EB5085006-515	
								EB5085006-550FSW	
				EB5085006-1000FSC					
				EB5085006-1030					
V6S		90°-900	8.3	6	12	0.75	85°	EB5088006-515	
								EB5088006-550FSW	
				EB5088006-1000FSC					
				EB5088006-1030					
V8	90°-850	11.0	8	20	1	85°	EB5185006-515		
							EB5185006-550FSW		
			EB5185006-1000FSC						
			EB5185006-1030						
V8S	90°-800	9.0	8	14	1	85°	EB5188006-515		
							EB5188006-550FSW		
			EB5188006-1000FSC						
			EB5188006-1030						




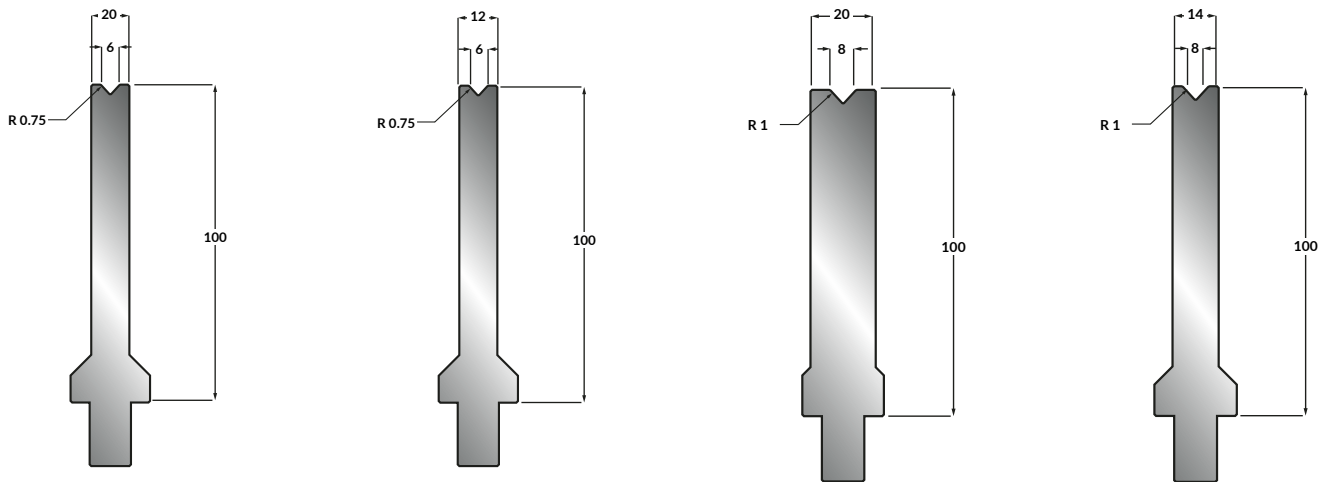


BYSTRONIC PROFILE	HEIGHT mm	MAX FORCE kN/m	WEIGHT KG/M	V OPENING	WIDTH	RADIUS	ANGLE	LENGTH	PRICE	
V6	100	90°-800	12.5	6	20	0.75	85°	EB6085006-515		
								EB6085006-550FSW		
								EB6085006-1000FSC		
								EB6085006-1030		
		90°-800	12.5	6	20	0.75	88°	EB6088006-515		
								EB6088006-550FSW		
								EB6088006-1000FSC		
								EB6088006-1030		
V6S		90°-800	12.5	6	12	0.75	85°	EB6185006-515		
								EB6185006-550FSW		
								EB6185006-1000FSC		
								EB6185006-1030		
			90°-800	12.5	6	12	0.75	88°	EB6188006-515	
									EB6188006-550FSW	
									EB6188006-1000FSC	
									EB6188006-1030	
V8	90°-850	18.0	8	20	1	85°	EB6085008-515			
							EB6085008-550FSW			
							EB6085008-1000FSC			
							EB6085008-1030			
		90°-850	18.0	8	20	1	88°	EB6088008-515		
								EB6088008-550FSW		
								EB6088008-1000FSC		
								EB6088008-1030		
V8S	90°-800	14.0	8	14	1	85°	EB6185008-515			
							EB6185008-550FSW			
							EB6185008-1000FSC			
							EB6185008-1030			
		90°-800	14.0	8	14	1	88°	EB6188008-515		
								EB6188008-550FSW		
								EB6188008-1000FSC		
								EB6188008-1030		

All dies induction hardened - For Nitrex consult Sales Desk




DIES ANGLE 85° & 88°




*Width used to be 20mm

BYSTRONIC PROFILE	HEIGHT mm	MAX FORCE kN/m	WEIGHT KG/M	V OPENING	WIDTH	RADIUS	ANGLE	LENGTH	PRICE
V10	55	90°-1000	10.6	10	20	1	85°	EB5085010-515	
								EB5085010-550FSW	
				EB5085010-1000FSC					
				EB5085010-1030					
10		20	1	88°	EB5088010-515				
					EB5088010-550FSW				
					EB5088010-1000FSC				
					EB5088010-1030				
V10S		90°-800	9.6	10	16	1	85°	EB5185010-515	
								EB5185010-550FSW	
				EB5185010-1000FSC					
				EB5185010-1030					
10		16	1	88°	EB5188010-515				
					EB5188010-550FSW				
					EB5188010-1000FSC				
					EB5188010-1030				
V12	90°-1000	12.5	12	25	1.5	85°	EB5085012-515		
							EB5085012-550FSW		
			EB5085012-1000FSC						
			EB5085012-1030						
12	25	1.5	88°	EB5088012-515					
				EB5088012-550FSW					
				EB5088012-1000FSC					
				EB5088012-1030					
V12S	90°-700	10.3	12	18*	1.5	85°	EB5185012-515		
							EB5185012-550FSW		
			EB5185012-1000FSC						
			EB5185012-1030						
12	18*	1.5	88°	EB5188012-515					
				EB5188012-550FSW					
				EB5188012-1000FSC					
				EB5188012-1030					

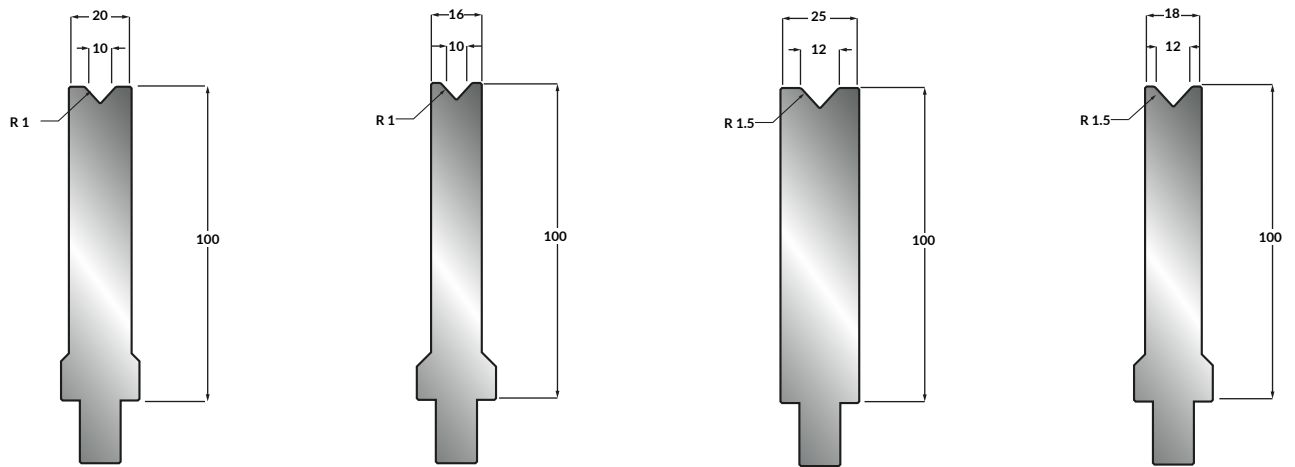


BYSTRONIC PROFILE	HEIGHT mm	MAX FORCE kN/m	WEIGHT KG/M	V OPENING	WIDTH	RADIUS	ANGLE	LENGTH	PRICE	
V10	100	90°-800	17.9	10	20	1	85°	EB6085010-515		
								EB6085010-550FSW		
				EB6085010-1000FSC						
				EB6085010-1030						
					10	20	1	88°	EB6088010-515	
									EB6088010-550FSW	
					EB6088010-1000FSC					
					EB6088010-1030					
V10S		90°-700	15.2	10	16	1	85°	EB6185010-515		
								EB6185010-550FSW		
				EB6185010-1000FSC						
				EB6185010-1030						
					10	16	1	88°	EB6188010-515	
									EB6188010-550FSW	
					EB6188010-1000FSC					
					EB6188010-1030					
V12	90°-900	21.3	12	25	1.5	85°	EB6085012-515			
							EB6085012-550FSW			
			EB6085012-1000FSC							
			EB6085012-1030							
				12	25	1.5	88°	EB6088012-515		
								EB6088012-550FSW		
				EB6088012-1000FSC						
				EB6088012-1030						
V12S	90°-900	16.5	12	18	1.5	85°	EB6185012-515			
							EB6185012-550FSW			
			EB6185012-1000FSC							
			EB6185012-1030							
				12	18	1.5	88°	EB6188012-515		
								EB6188012-550FSW		
				EB6188012-1000FSC						
				EB6188012-1030						

DIES ANGLE 85° & 88°

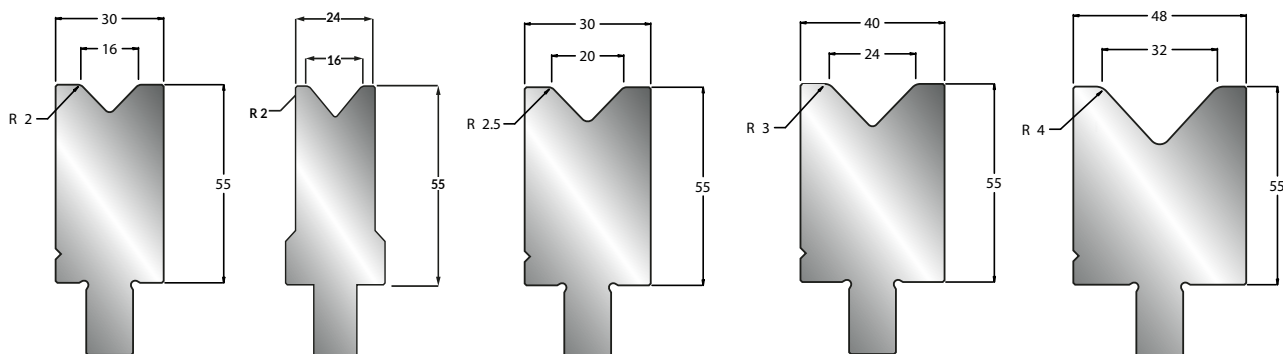

*Width used to
be 35mm

BYSTRONIC PROFILE	HEIGHT mm	MAX FORCE kN/m	WEIGHT KG/M	V OPENING	WIDTH	RADIUS	ANGLE	LENGTH	PRICE
V16	55	90°-1000	14.4	16	30	2	85°	EB5085016-515	
								EB5085016-550FSW	
				16	30	2	88°	EB5030016-1000FSC	
								EB5030016-1030	
		16	30	2	88°	EB5088016-515			
						EB5088016-550FSW			
		16	30	2	88°	EB5088016-1000FSC			
						EB5088016-1030			
V16S		90°-1000	12.5	16	24	2	85°	EB5185016-515	
								EB5185016-550FSW	
				16	24	2	88°	EB5185016-1000FSW	
								EB5185016-1030	
		16	24	2	88°	EB5188016-515			
						EB5188016-550FSW			
		16	24	2	88°	EB5188016-1000FSC			
						EB5188016-1030			
V20		90°-1000	14.0	20	30*	2.5	85°	EB5085020-515	
								EB5085020-550FSW	
				20	30*	2.5	88°	EB5085020-1000FSC	
								EB5085020-1030	
		20	30*	2.5	88°	EB5088020-515			
						EB5088020-550FSW			
		20	30*	2.5	88°	EB5088020-1000FSC			
						EB5088020-1030			
V24		90°-1000	18.0	24	40	3	85°	EB5085024-515	
								EB5085024-550FSW	
				24	40	3	88°	EB5085024-1000FSC	
								EB5085024-1030	
		24	40	3	88°	EB5088024-515			
						EB5088024-550FSW			
		24	40	3	88°	EB5088024-1000FSC			
						EB5088024-1030			
V32		90°-1000	20.5	32	48	4	85°	EB5085032-515	
								EB5085032-550FSW	
				32	48	4	88°	EB5085032-1000FSC	
								EB5085032-1030	
		32	48	4	88°	EB5088032-515			
						EB5088032-550FSW			
		32	48	4	88°	EB5088032-1000FSC			
						EB5088032-1030			

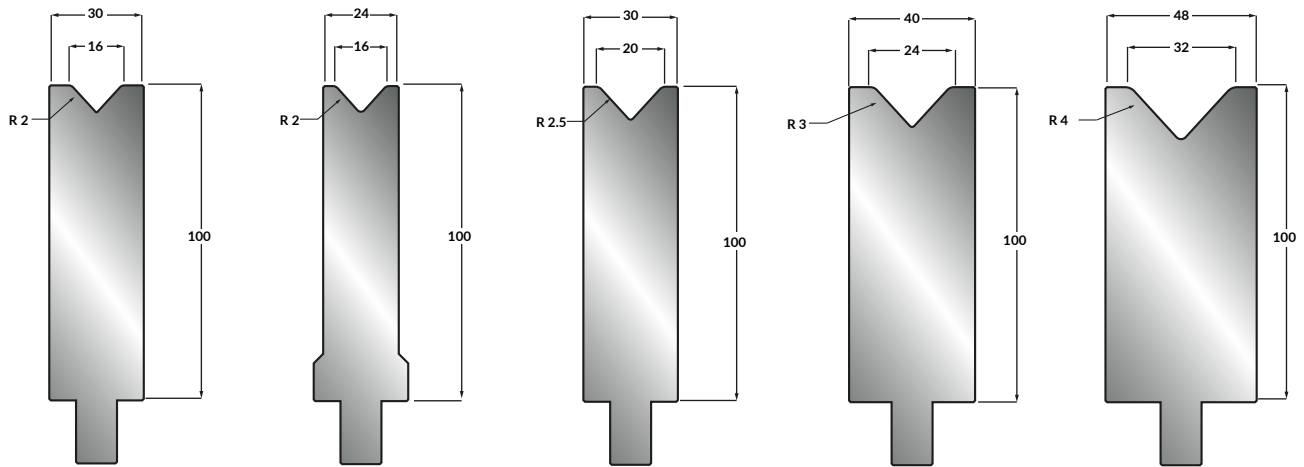


BYSTRONIC PROFILE	HEIGHT mm	MAX FORCE kN/m	WEIGHT KG/M	V OPENING	WIDTH	RADIUS	ANGLE	LENGTH	PRICE
V16	100	90°-1200	25.0	16	30	2	85°	EB6085016-515	
								EB6085016-550FSW	
				EB6030016-1000FSC					
				EB6030016-1030					
16		30	2	88°	EB6088016-515				
					EB6088016-550FSW				
					EB6088016-1000FSC				
					EB6088016-1030				
V16S		90°-1200	21.0	16	24	2	85°	EB6185016-515	
								EB6185016-550FSW	
				EB6185016-1000FSC					
				EB6185016-1030					
16		24	2	88°	EB6188016-515				
					EB6188016-550FSW				
					EB6188016-1000FSC				
					EB6188016-1030				
V20		90°-1400	24.6	20	30	2.5	85°	EB6085020-515	
								EB6085020-550FSW	
				EB6085020-1000FSC					
				EB6085020-1030					
20		30	2.5	88°	EB6088020-515				
					EB6088020-550FSW				
					EB6088020-1000FSC				
					EB6088020-1030				
V24		90°-1700	32.1	24	40	3	85°	EB6085024-515	
								EB6085024-550FSW	
				EB6085024-1000FSC					
				EB6085024-1030					
24		40	3	88°	EB6088024-515				
					EB6088024-550FSW				
					EB6088024-1000FSC				
					EB6088024-1030				
V32		90°-2500	37.5	32	48	4	85°	EB6085032-515	
								EB6085032-550FSW	
				EB6085032-1000FSC					
				EB6085032-1030					
32		48	4	88°	EB6088032-515				
					EB6088032-550FSW				
					EB6088032-1000FSC				
					EB6088032-1030				

All dies induction hardened - For Nitrex consult Sales Desk




ADAPTORS


Adaptor R-EuroA

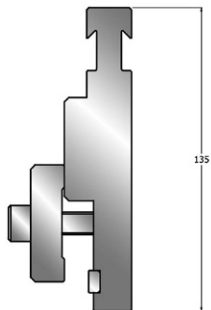


Adaptor R-EuroB

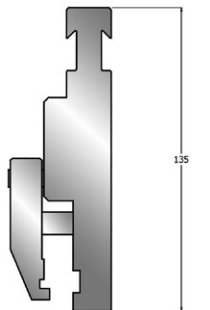


Adaptor R-R

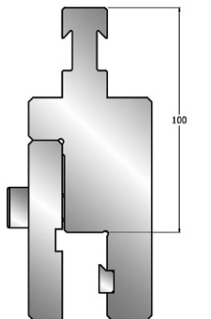

Adaptor R-S

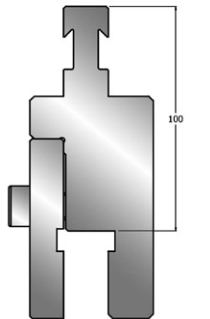


Adaptor R-RFA

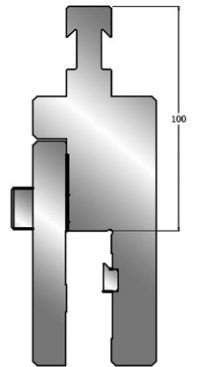


BYSTRONIC PROFILE	CAT NO	PRICE
R-EuroA	Contact your Sales Desk	
R-EuroB		
R-R		
R-S		
R-RFA		


Adaptor RFA-EuroA

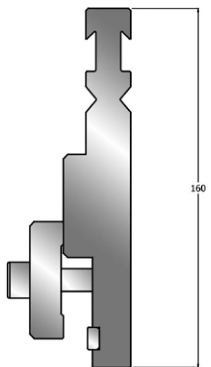


Adaptor RFA-EuroB

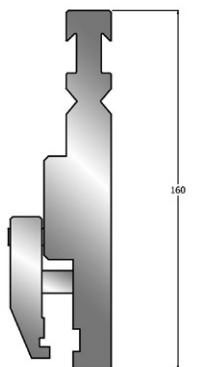

Adaptor RFA-R

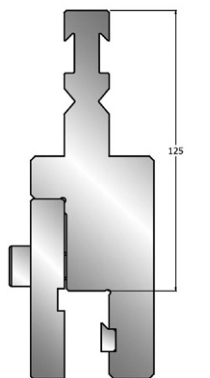

Adaptor RFA-RFA

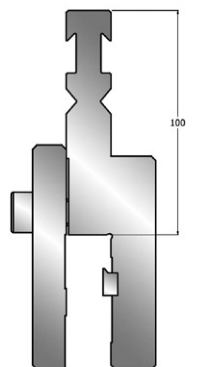


BYSTRONIC PROFILE	CAT NO	PRICE
RFA-EuroA	Contact your Sales Desk	
RFA-EuroB		
RFA-R		
RFA-RFA		


BYSTRONIC™ STYLE | Hemming



HEMMING RF PUNCHES HEIGHT 175

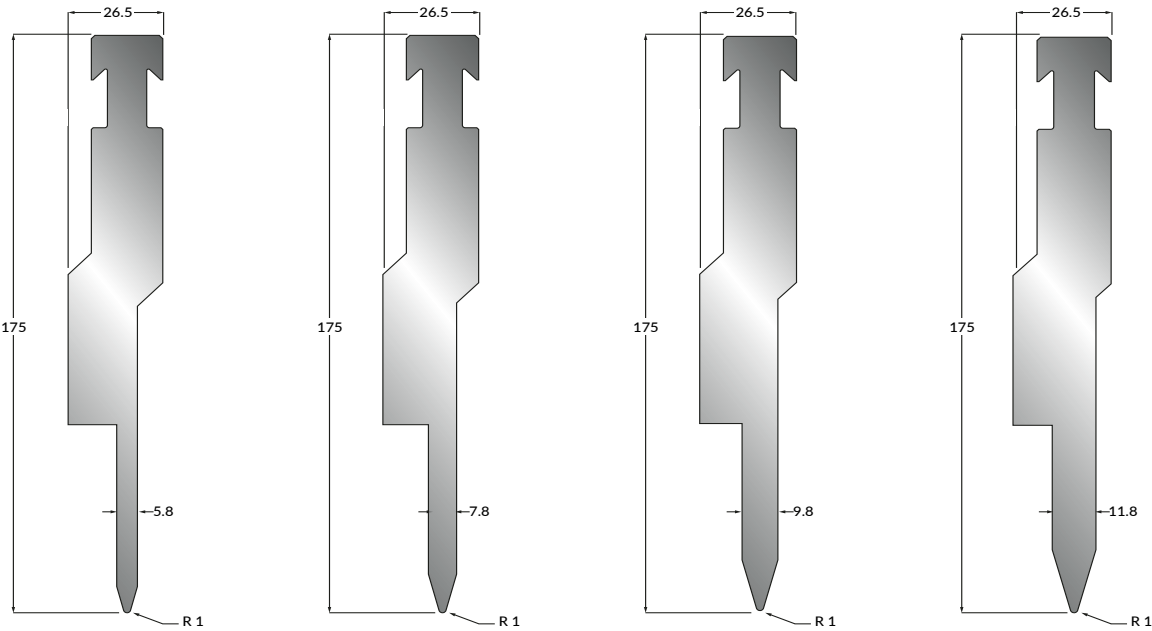


BYSTRONIC PROFILE	HEIGHT mm	MAX FORCE kN/m	WEIGHT KG/M	ANGLE	RADIUS	LENGTH	PRICE
P900/06	175	1000	22.6	30°	1.0	EB0330010-6-515	
						EB0330010-6-FSC	
						EB0330010-6-1030	
P900/08						EB0330010-8-515	
						EB0330010-8-FSC	
						EB0330010-8-1030	
P900/10						EB0330010-10-515	
						EB0330010-10-FSC	
						EB0330010-10-1030	
P900/12						EB0330010-12-515	
						EB0330010-12-FSC	
						EB0330010-12-1030	

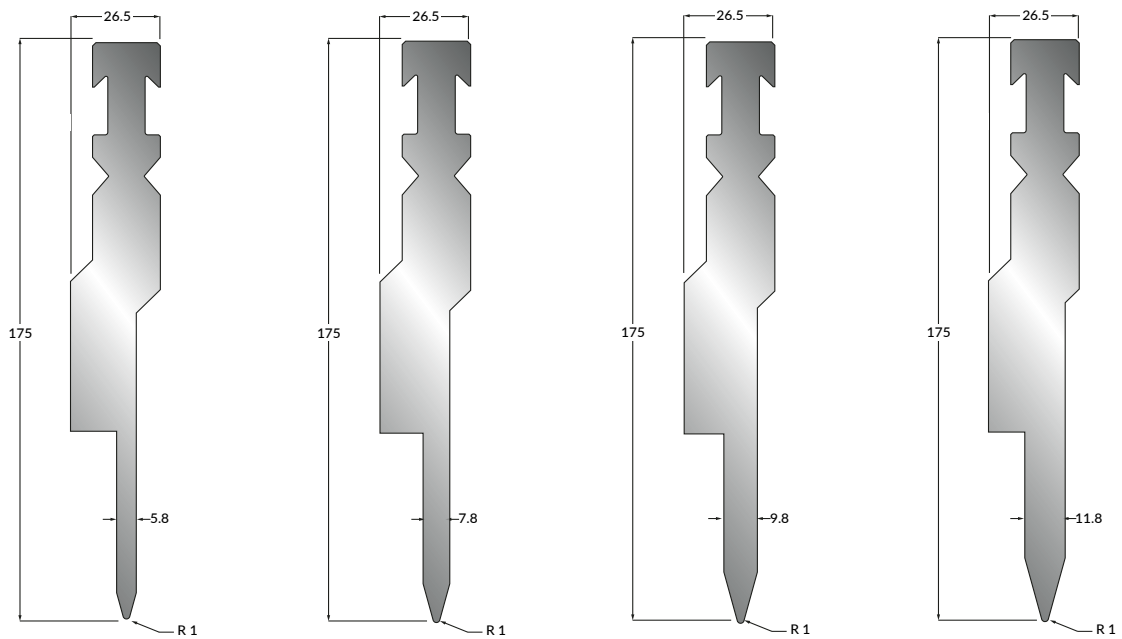


BYSTRONIC PROFILE	HEIGHT mm	MAX FORCE kN/m	WEIGHT KG/M	ANGLE	RADIUS	LENGTH	PRICE
P900/06	175	1000	22.6	30°	1.0	EB1330010-6-515	
						EB1330010-6-FSC	
						EB1330010-6-1030	
P900/08						EB1330010-8-515	
						EB1330010-8-FSC	
						EB1330010-8-1030	
P900/10						EB1330010-10-515	
						EB1330010-10-FSC	
						EB1330010-10-1030	
P900/12						EB1330010-12-515	
						EB1330010-12-FSC	
						EB1330010-12-1030	

HEMMING RFA PUNCHES HEIGHT 250

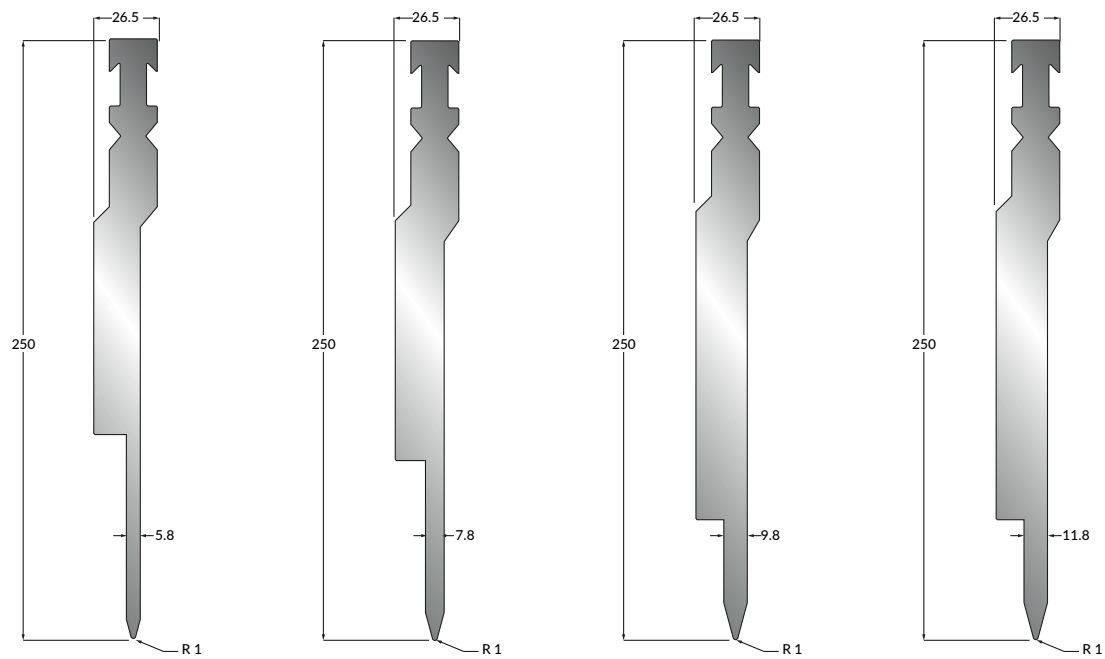

BYSTRONIC PROFILE	HEIGHT mm	MAX FORCE kN/m	WEIGHT KG/M	ANGLE	RADIUS	LENGTH	PRICE
P900/06	250	1000	35.0	30°	1.0	EB2330010-6-515	
						EB2330010-6-FSC	
						EB2330010-6-1030	
P900/08						EB2330010-8-515	
						EB2330010-8-FSC	
						EB2330010-8-1030	
P900/10						EB2330010-10-515	
						EB2330010-10-FSC	
						EB2330010-10-1030	
P900/12						EB2330010-12-515	
						EB2330010-12-FSC	
						EB2330010-12-1030	

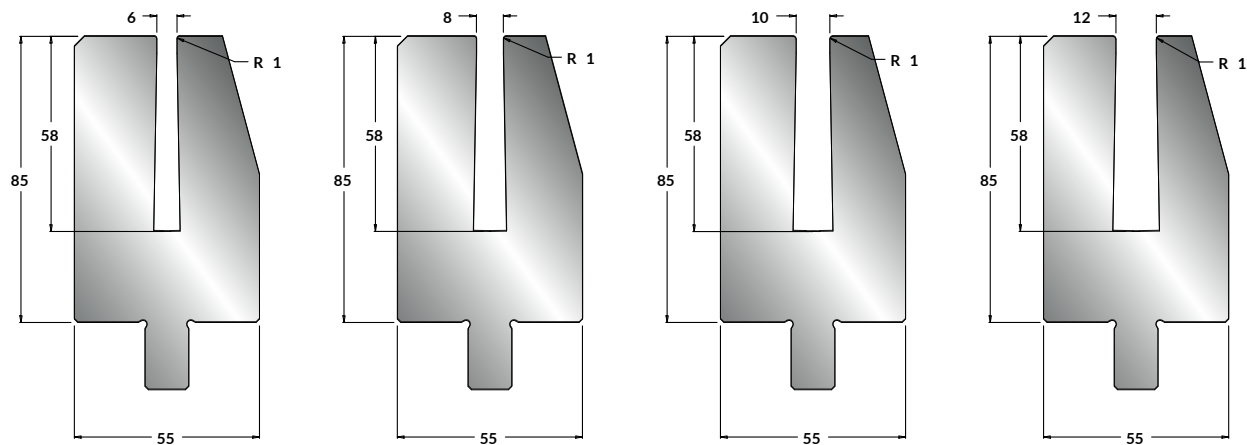


BYSTRONIC PROFILE	HEIGHT mm	MAX FORCE kN/m	WEIGHT KG/M	V OPENING	WIDTH	RADIUS	LENGTH	PRICE
V900/06	85	250	34.5	6	55	1.0	EB5330006-515	
							EB5330006-FSC	
							EB5330006-1030	
V900/08				8			EB5330008-515	
							EB5330008-FSC	
							EB5330008-1030	
V900/10				10			EB5330010-515	
							EB5330010-FSC	
							EB5330010-1030	
V900/12				12			EB5330012-515	
							EB5330012-FSC	
							EB5330012-1030	


BYSTRONIC™ STYLE | Bend Limit Graphs

BEND LIMIT GRAPHS FOR PUNCHES HEIGHT 155MM

EB0188010, EB0185010 (P2R)

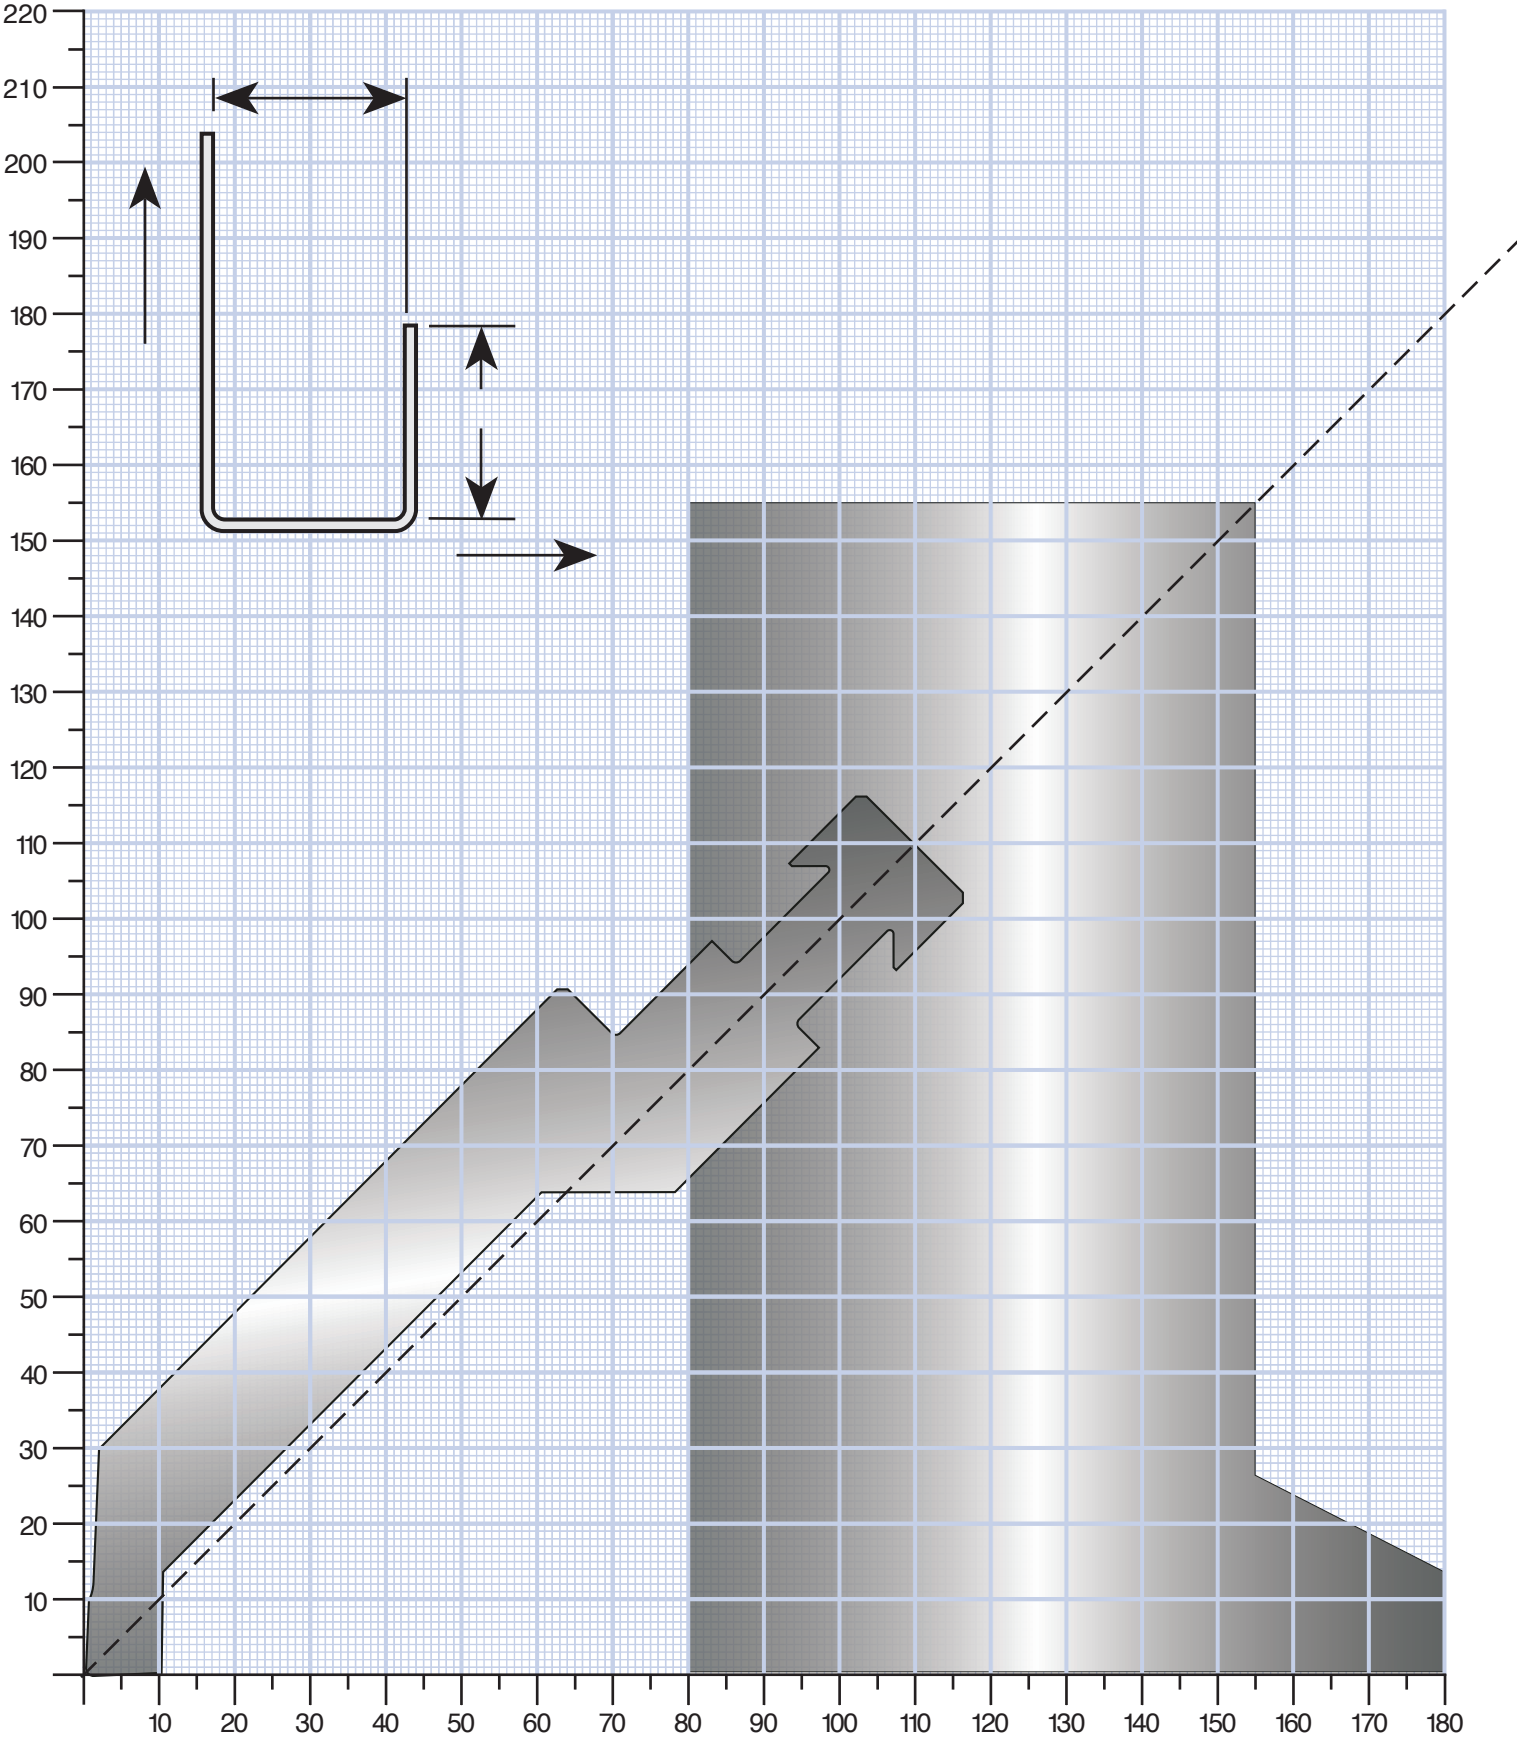


EB0088015, EB0085015 (P4R)

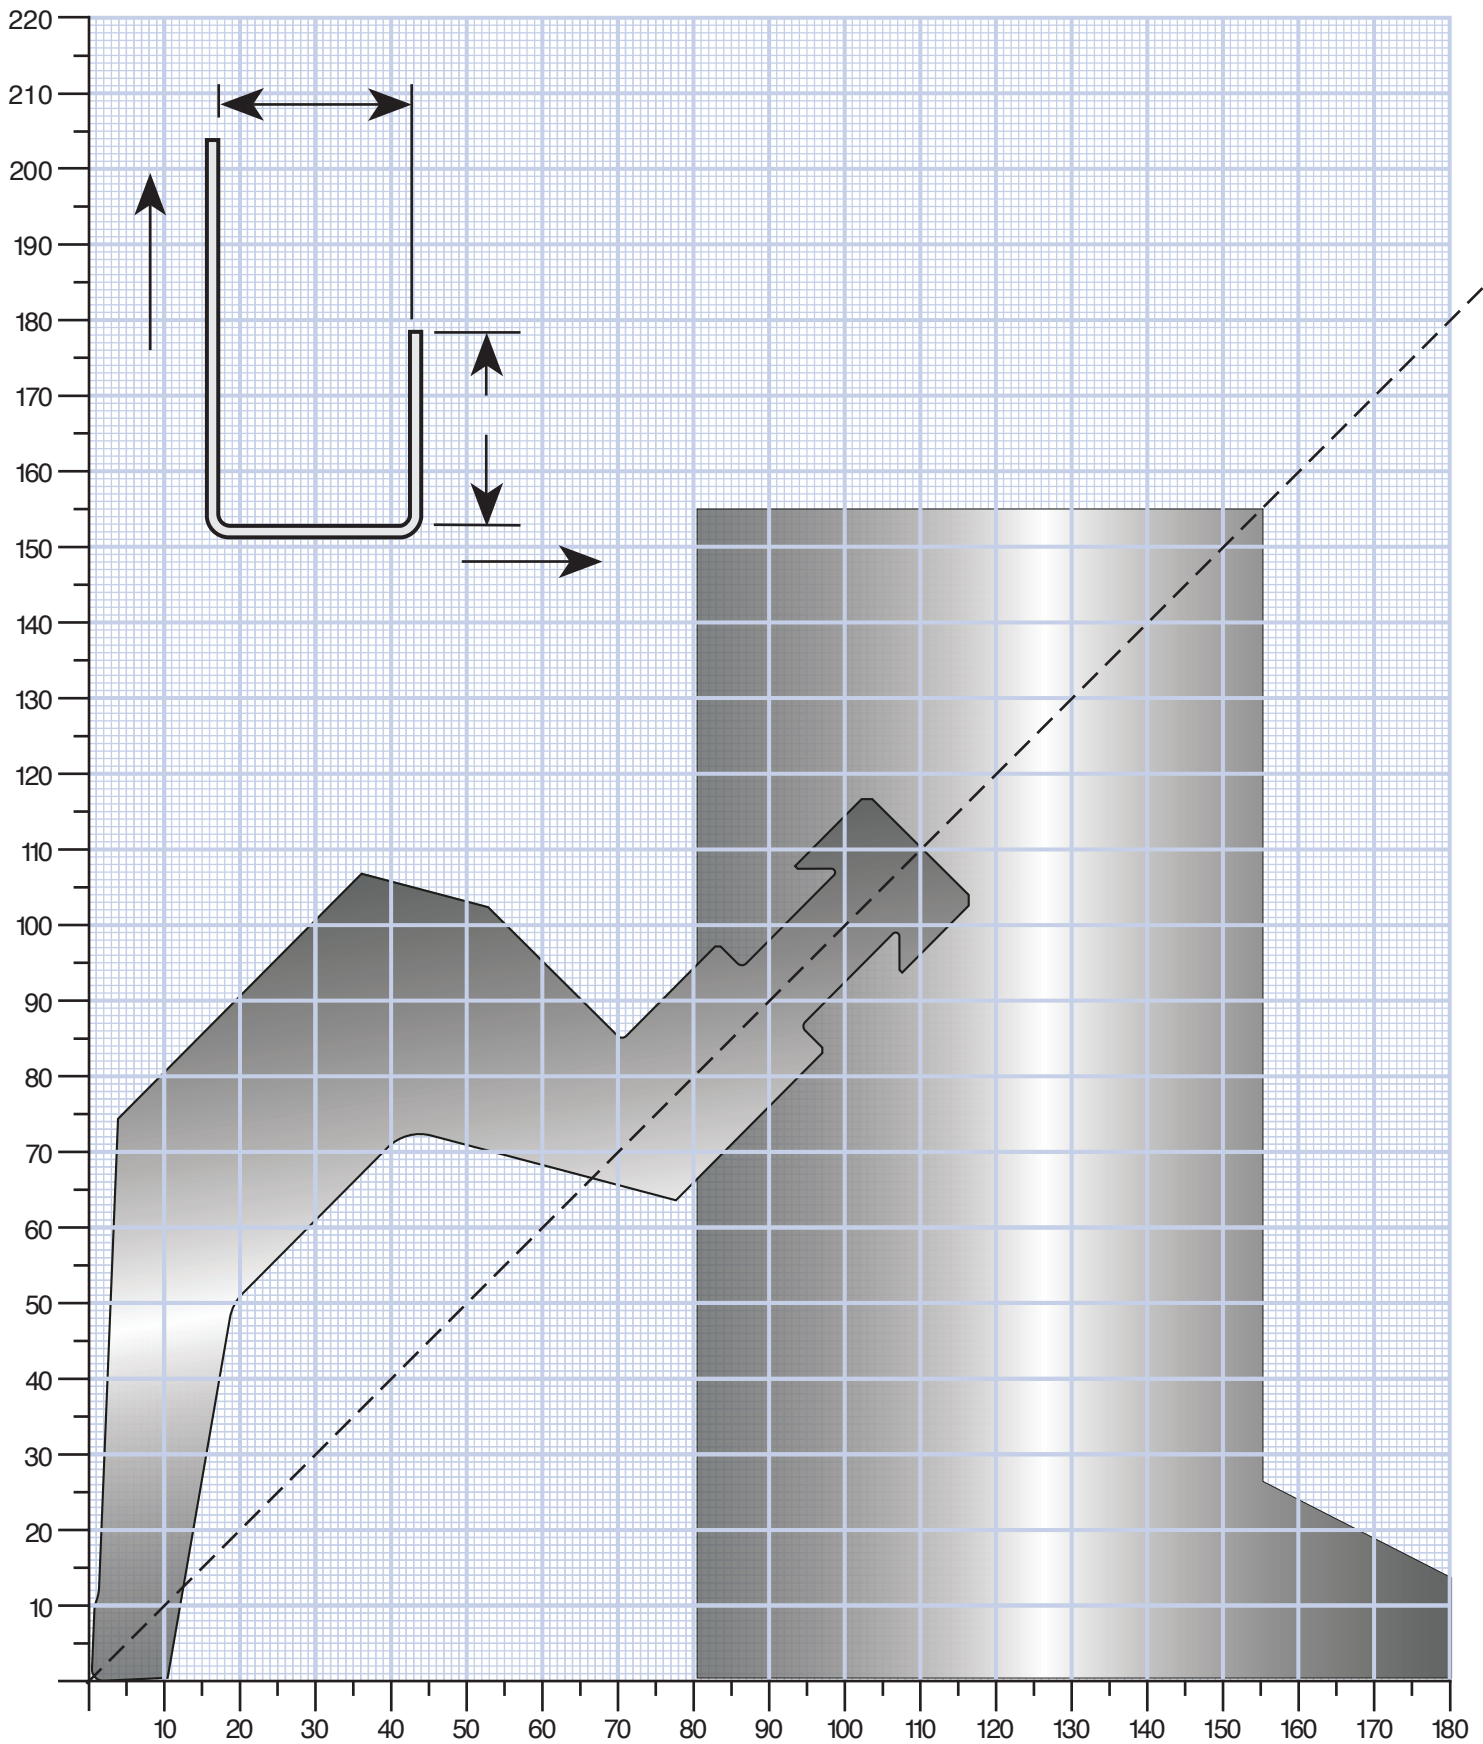


BEND LIMIT GRAPHS FOR PUNCHES HEIGHT 155MM

EB0230010 (P5R)

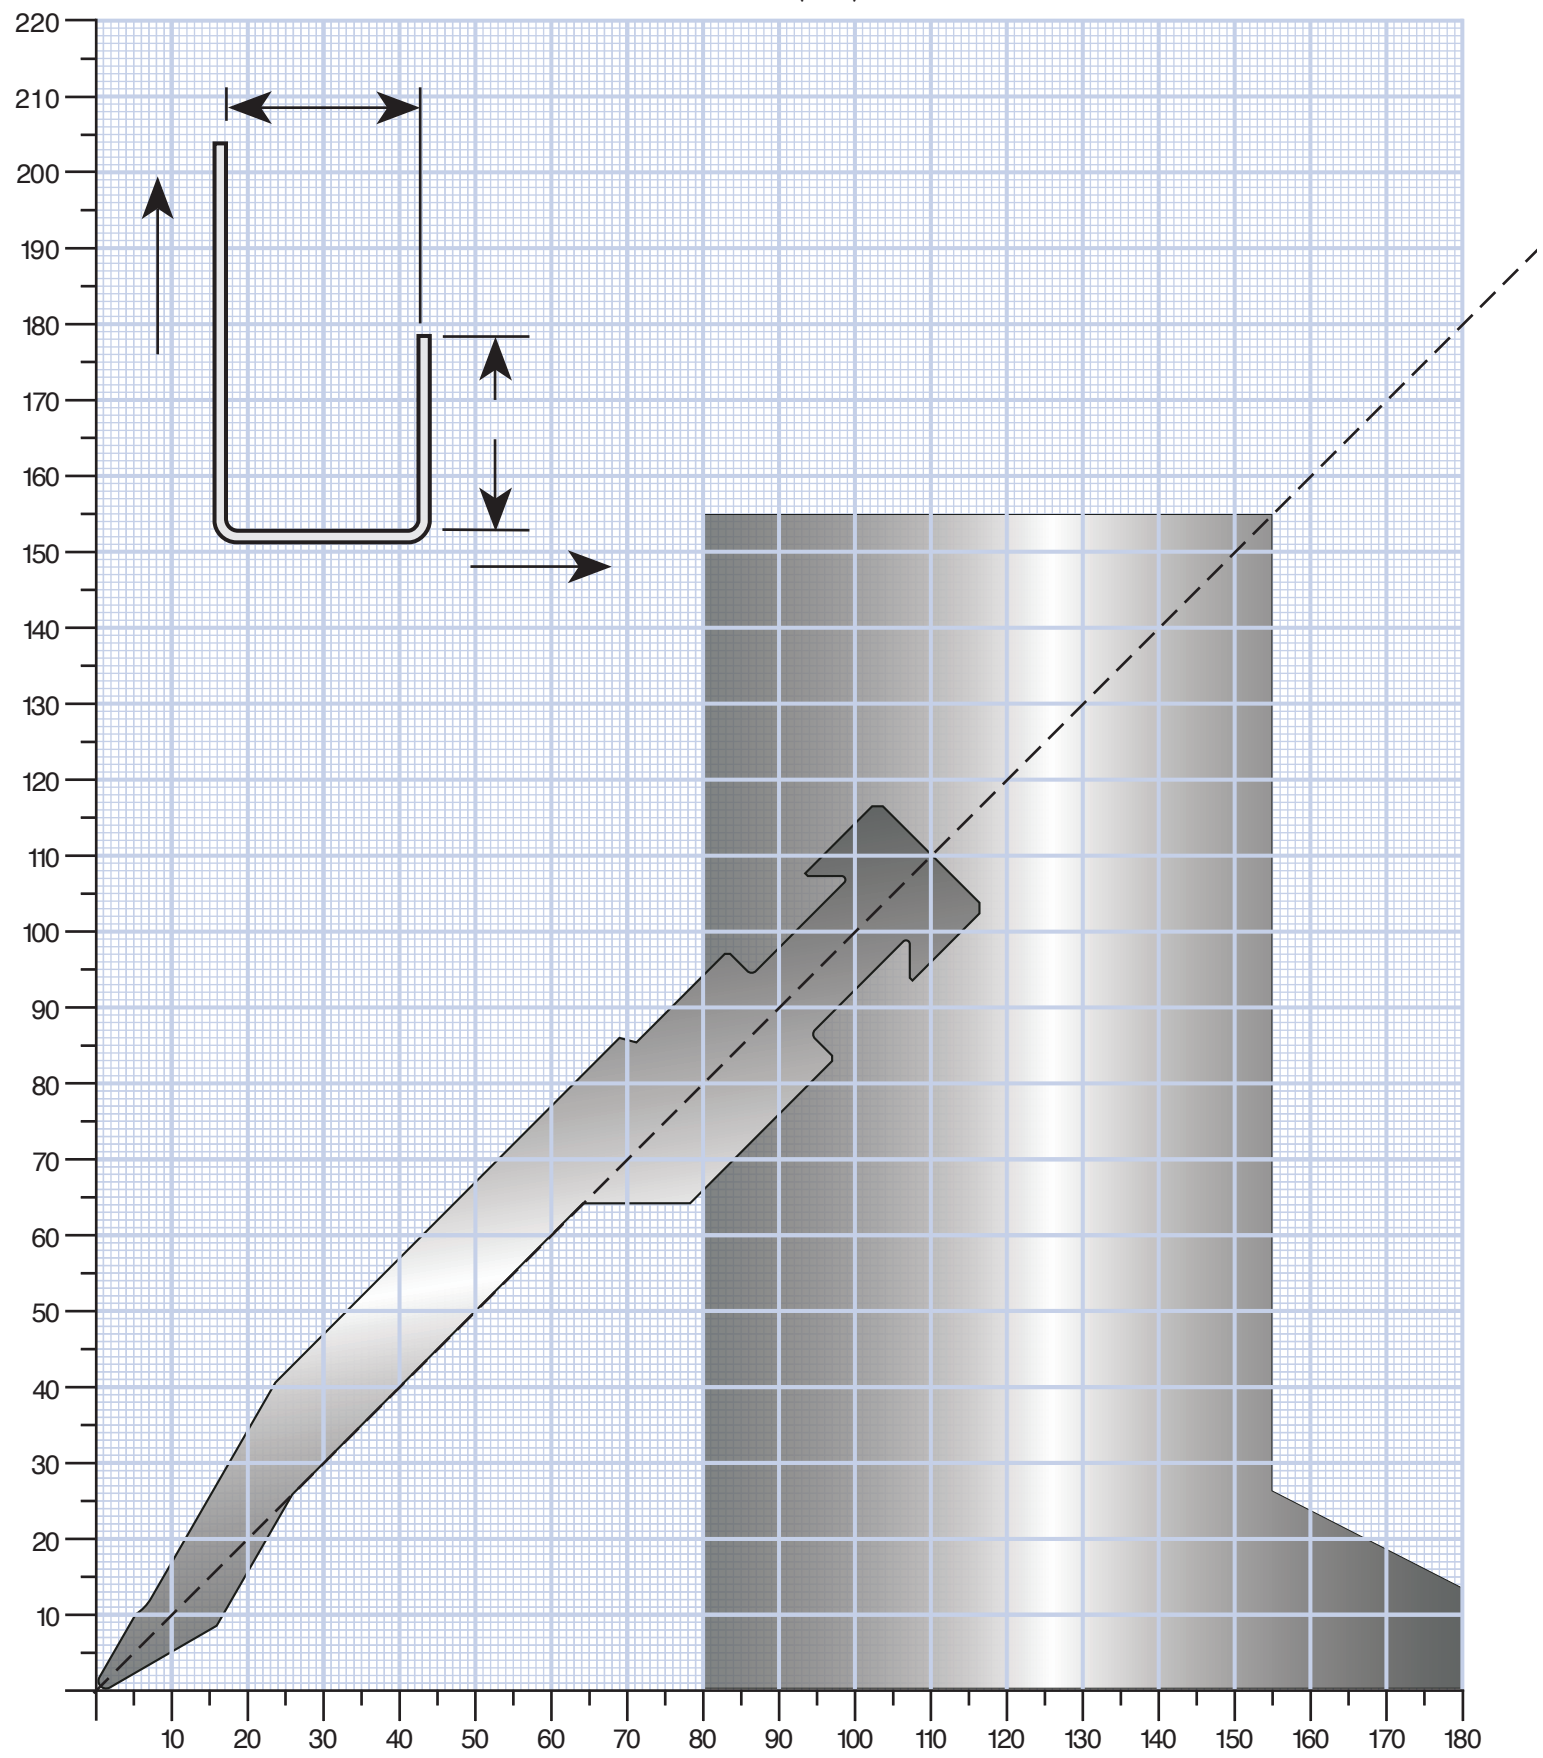


EB0430010 (P6R)

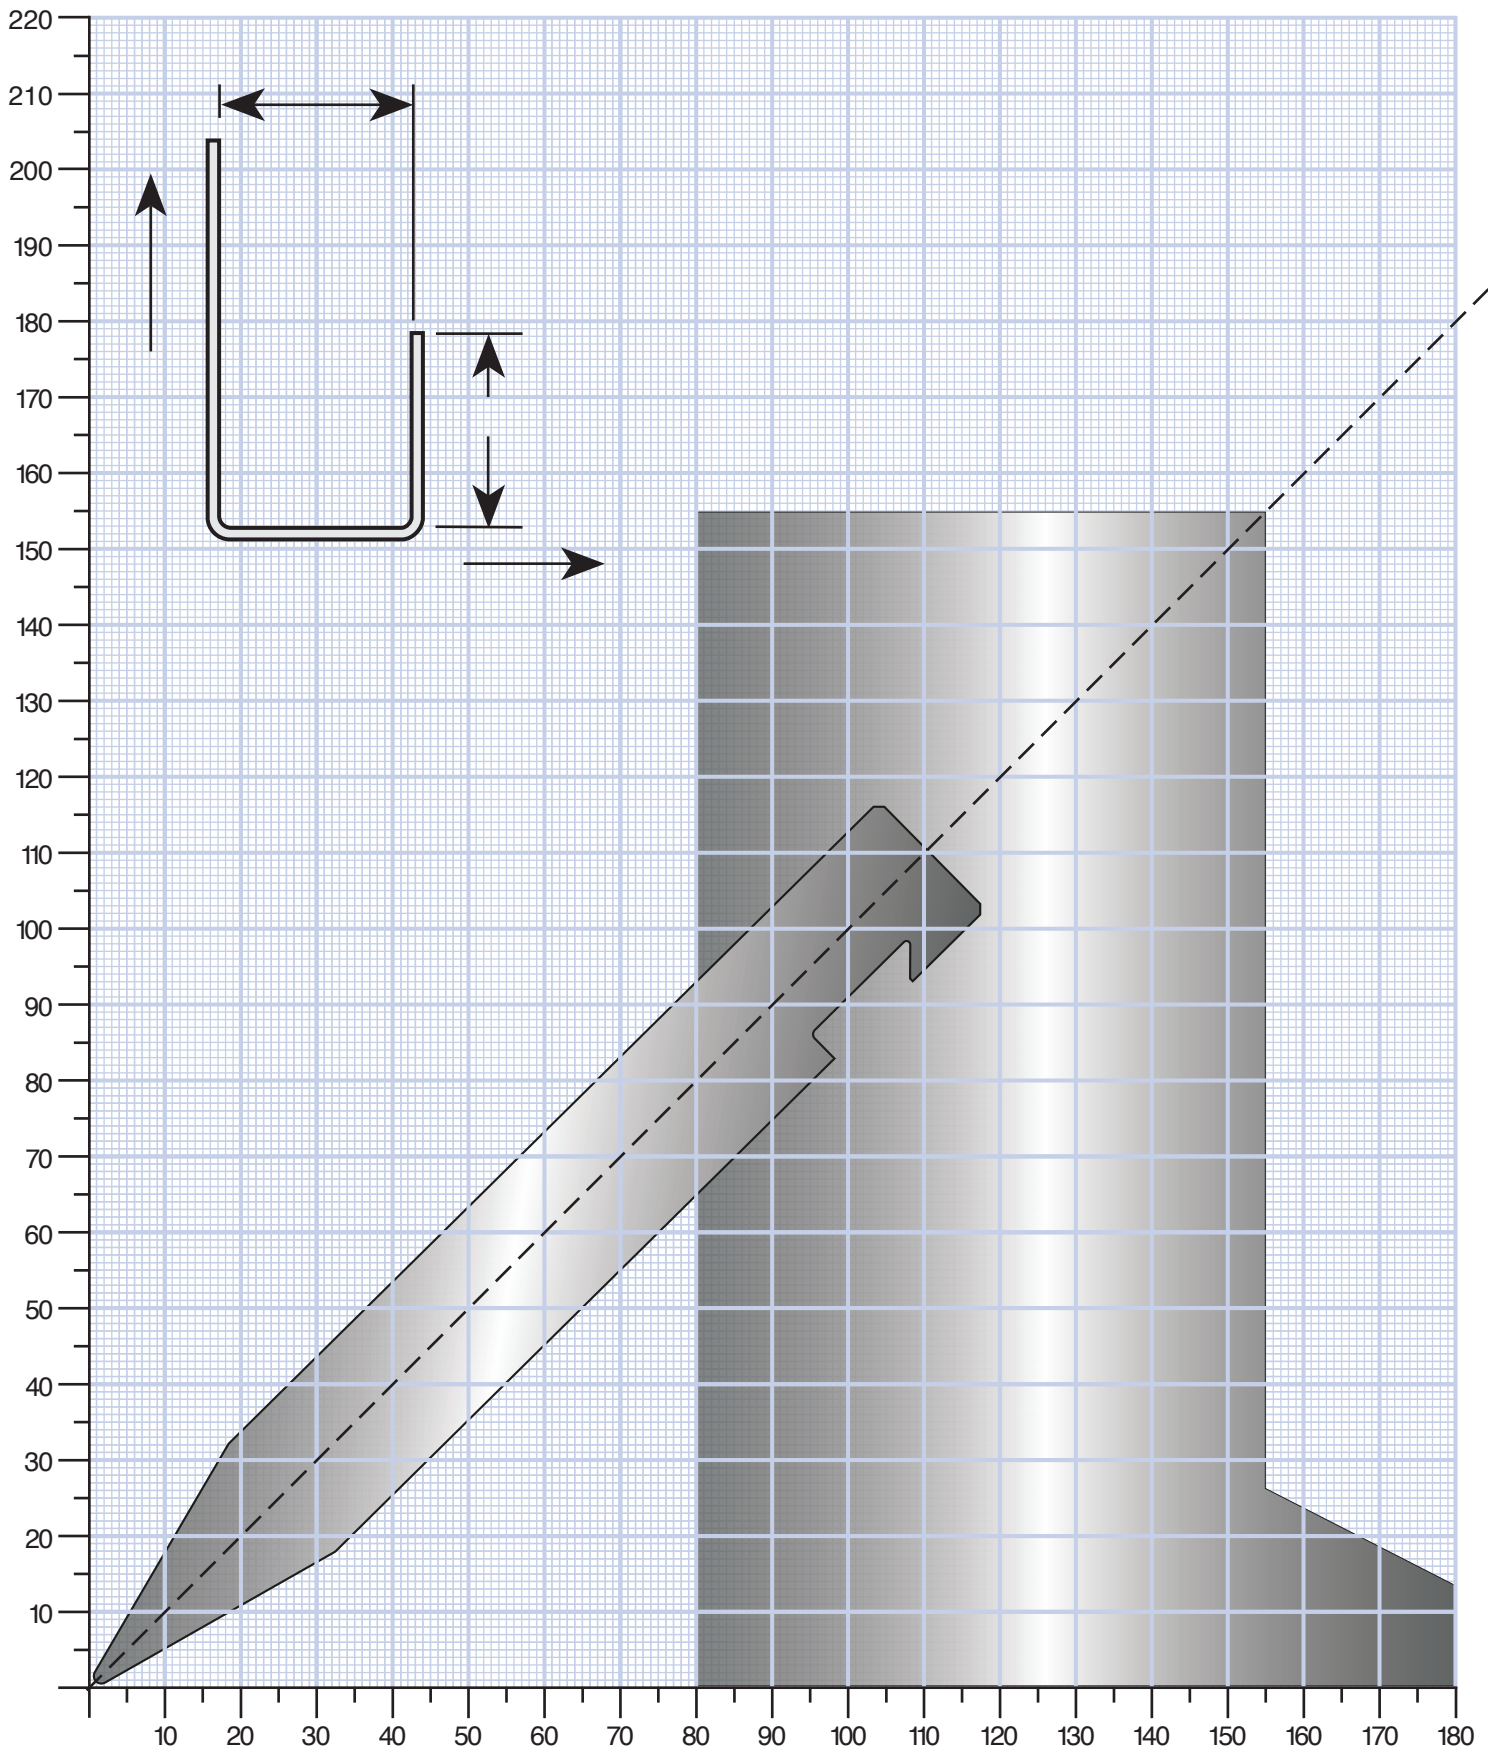


BEND LIMIT GRAPHS FOR PUNCHES HEIGHT 155MM

EB0588010, EB0585010 (P8R)

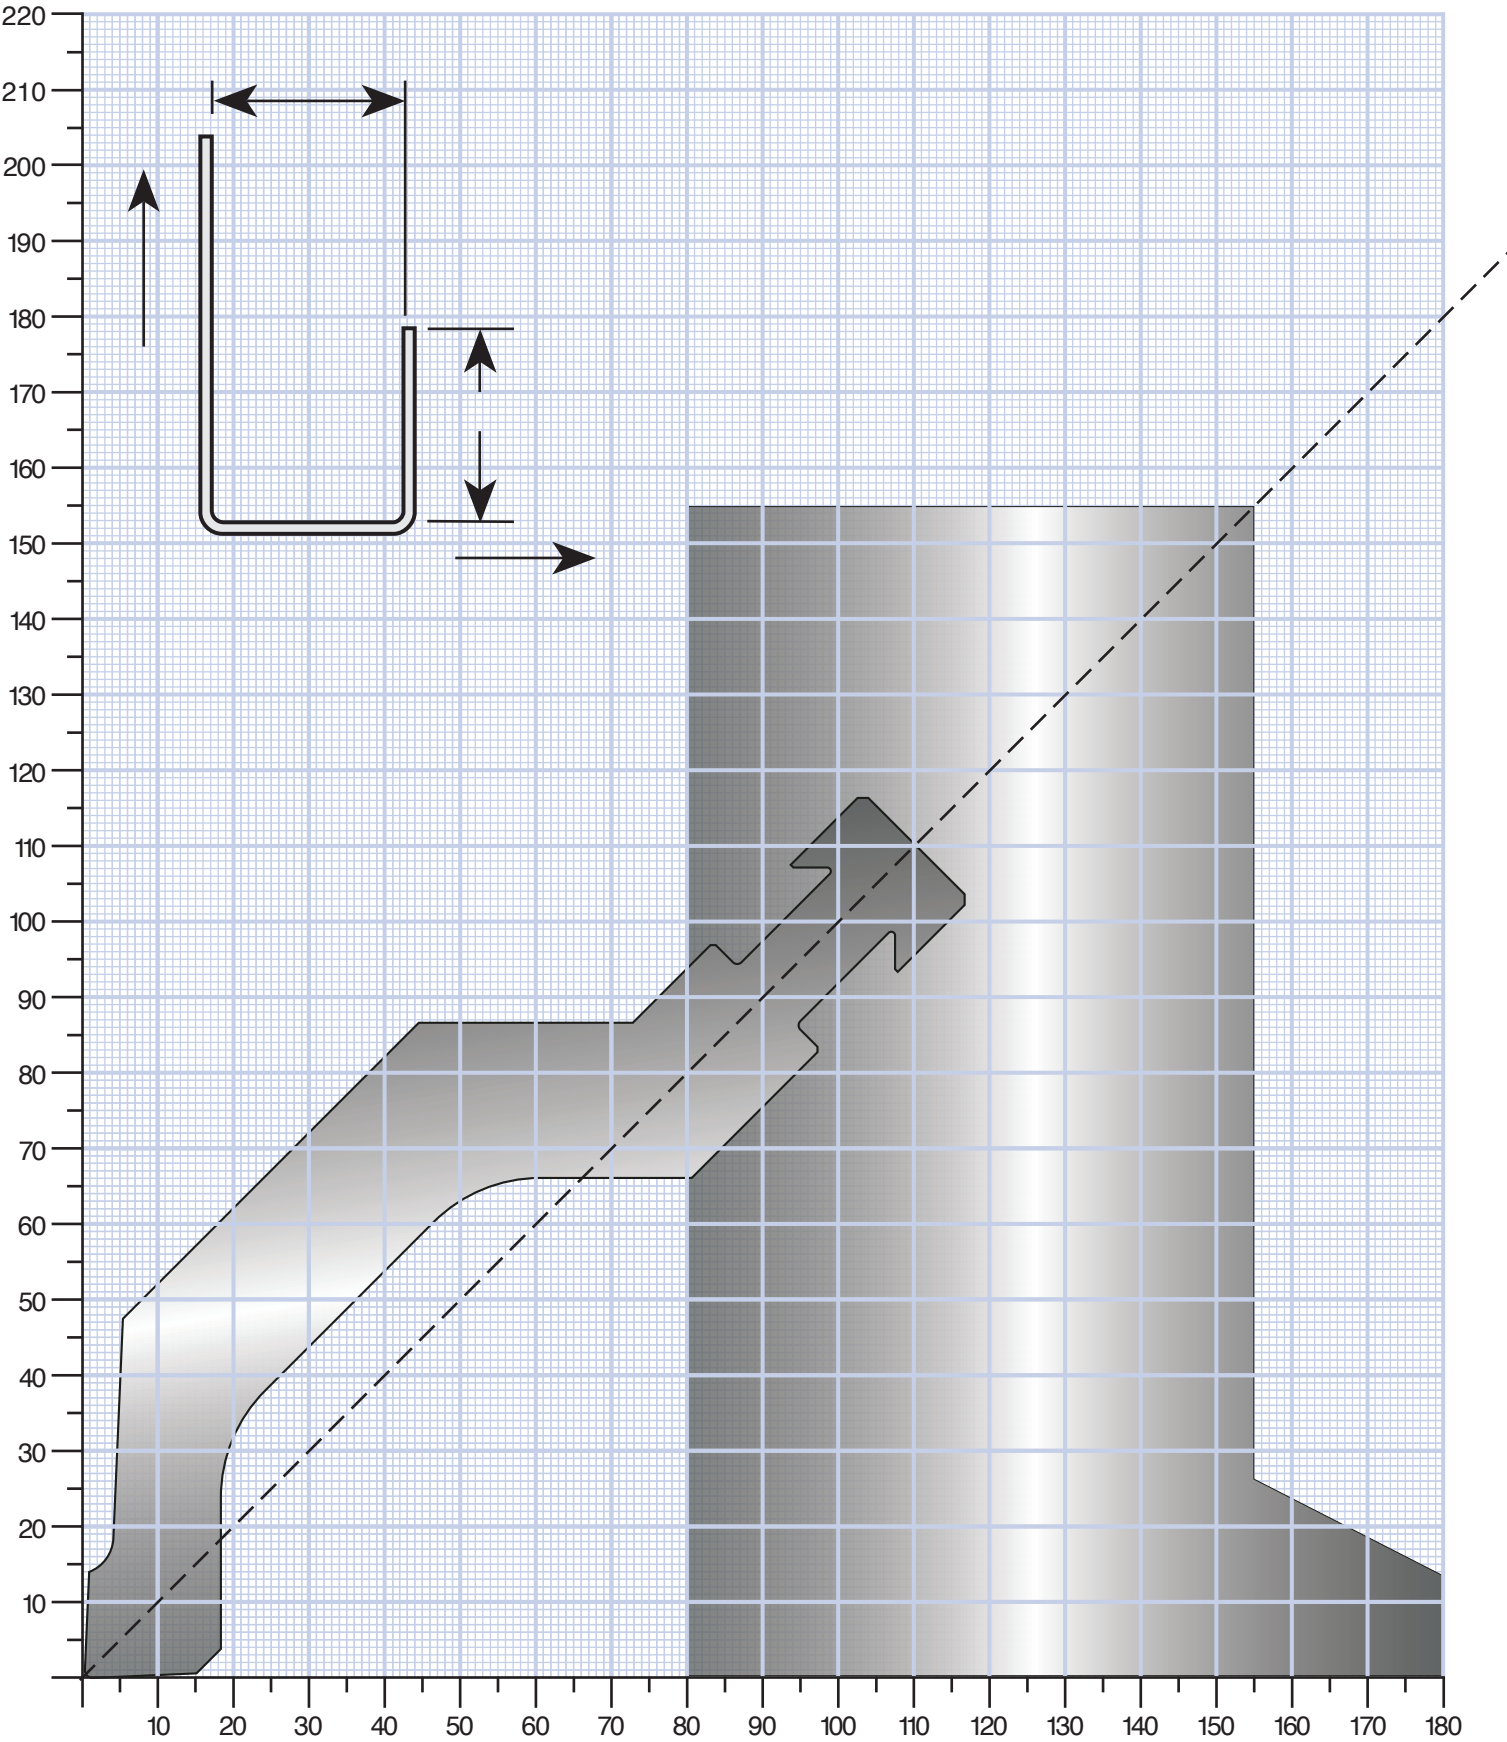


EB0460040 (P9R)

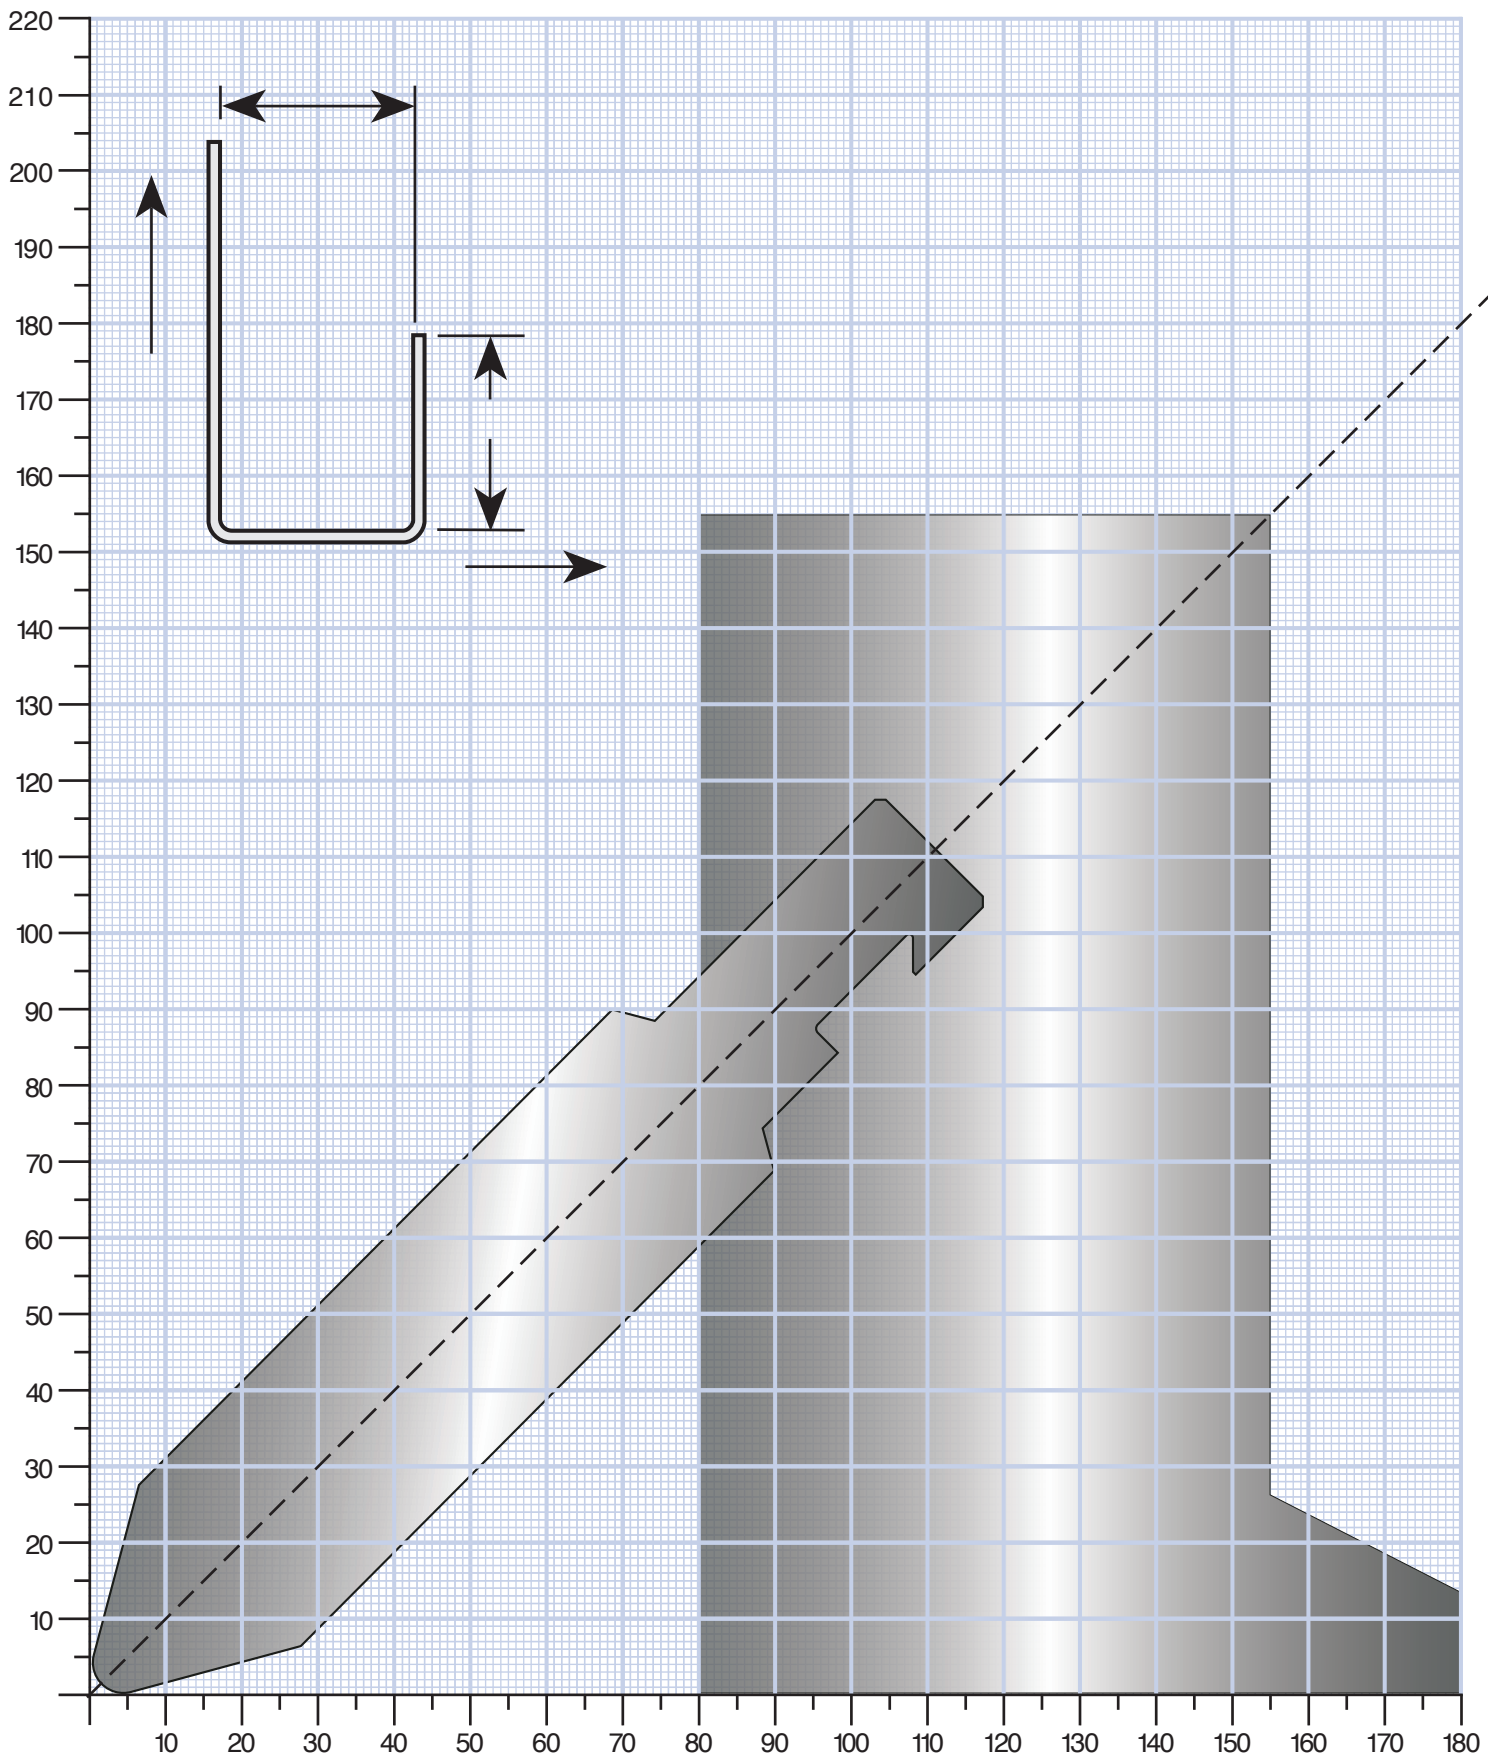


BEND LIMIT GRAPHS FOR PUNCHES HEIGHT 175MM

EB1188010, EB1185010 (P2RFA)

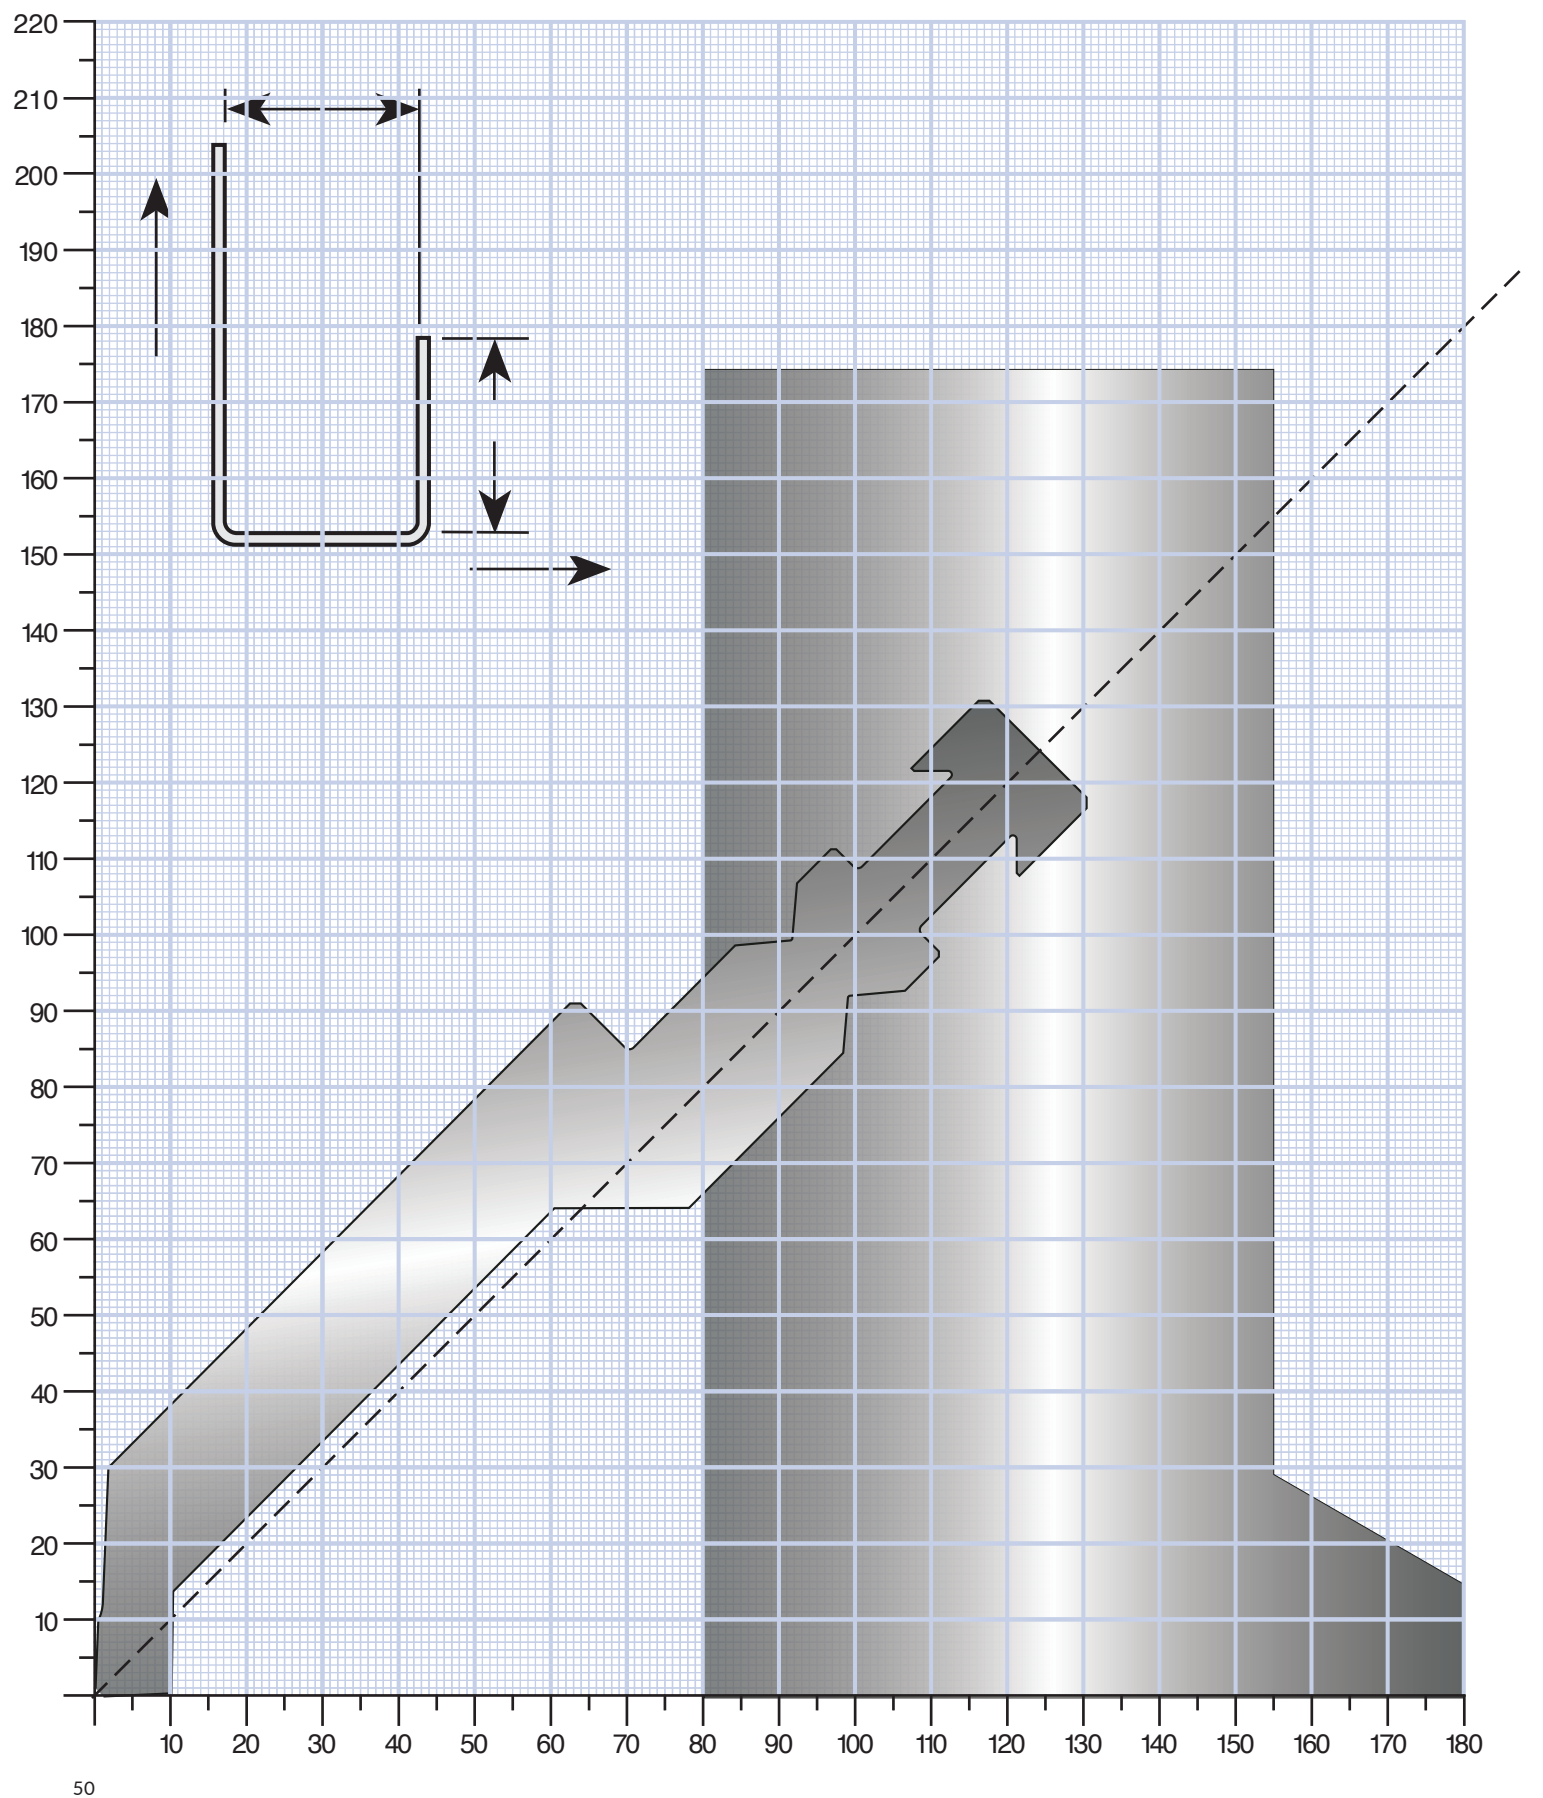


BEND LIMIT GRAPHS FOR PUNCHES HEIGHT 175MM

EB1785010, EB1785030, EB1788010, EB1788030 (P3RFA)

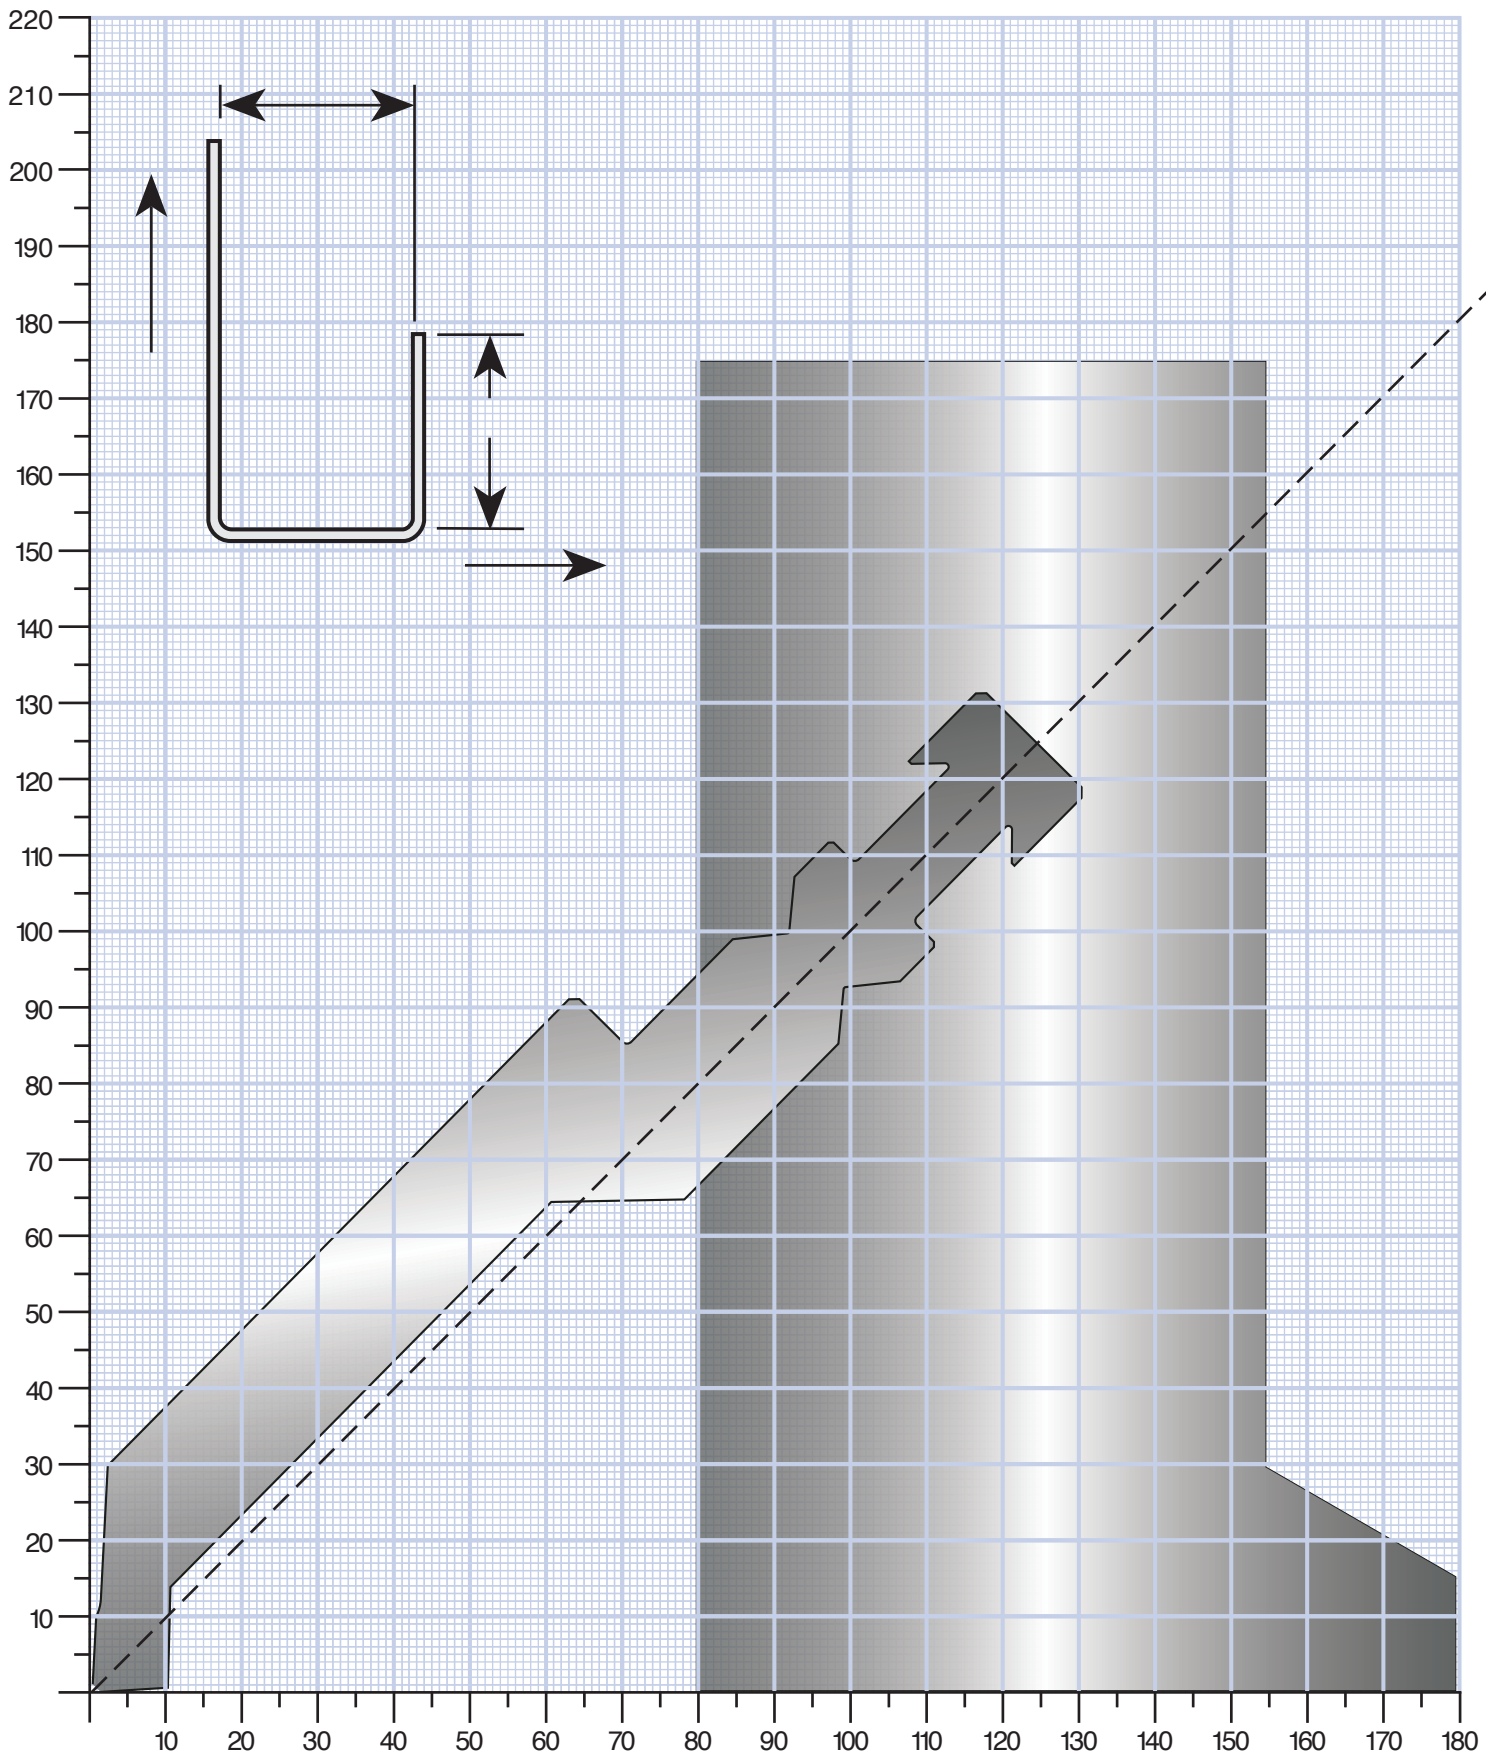


BEND LIMIT GRAPHS FOR PUNCHES HEIGHT 175MM

EB1085005, EB1085010, EB1085015, EB1085030, EB1088005, EB1088010, EB1088015, EB1088030 (P4RFA)

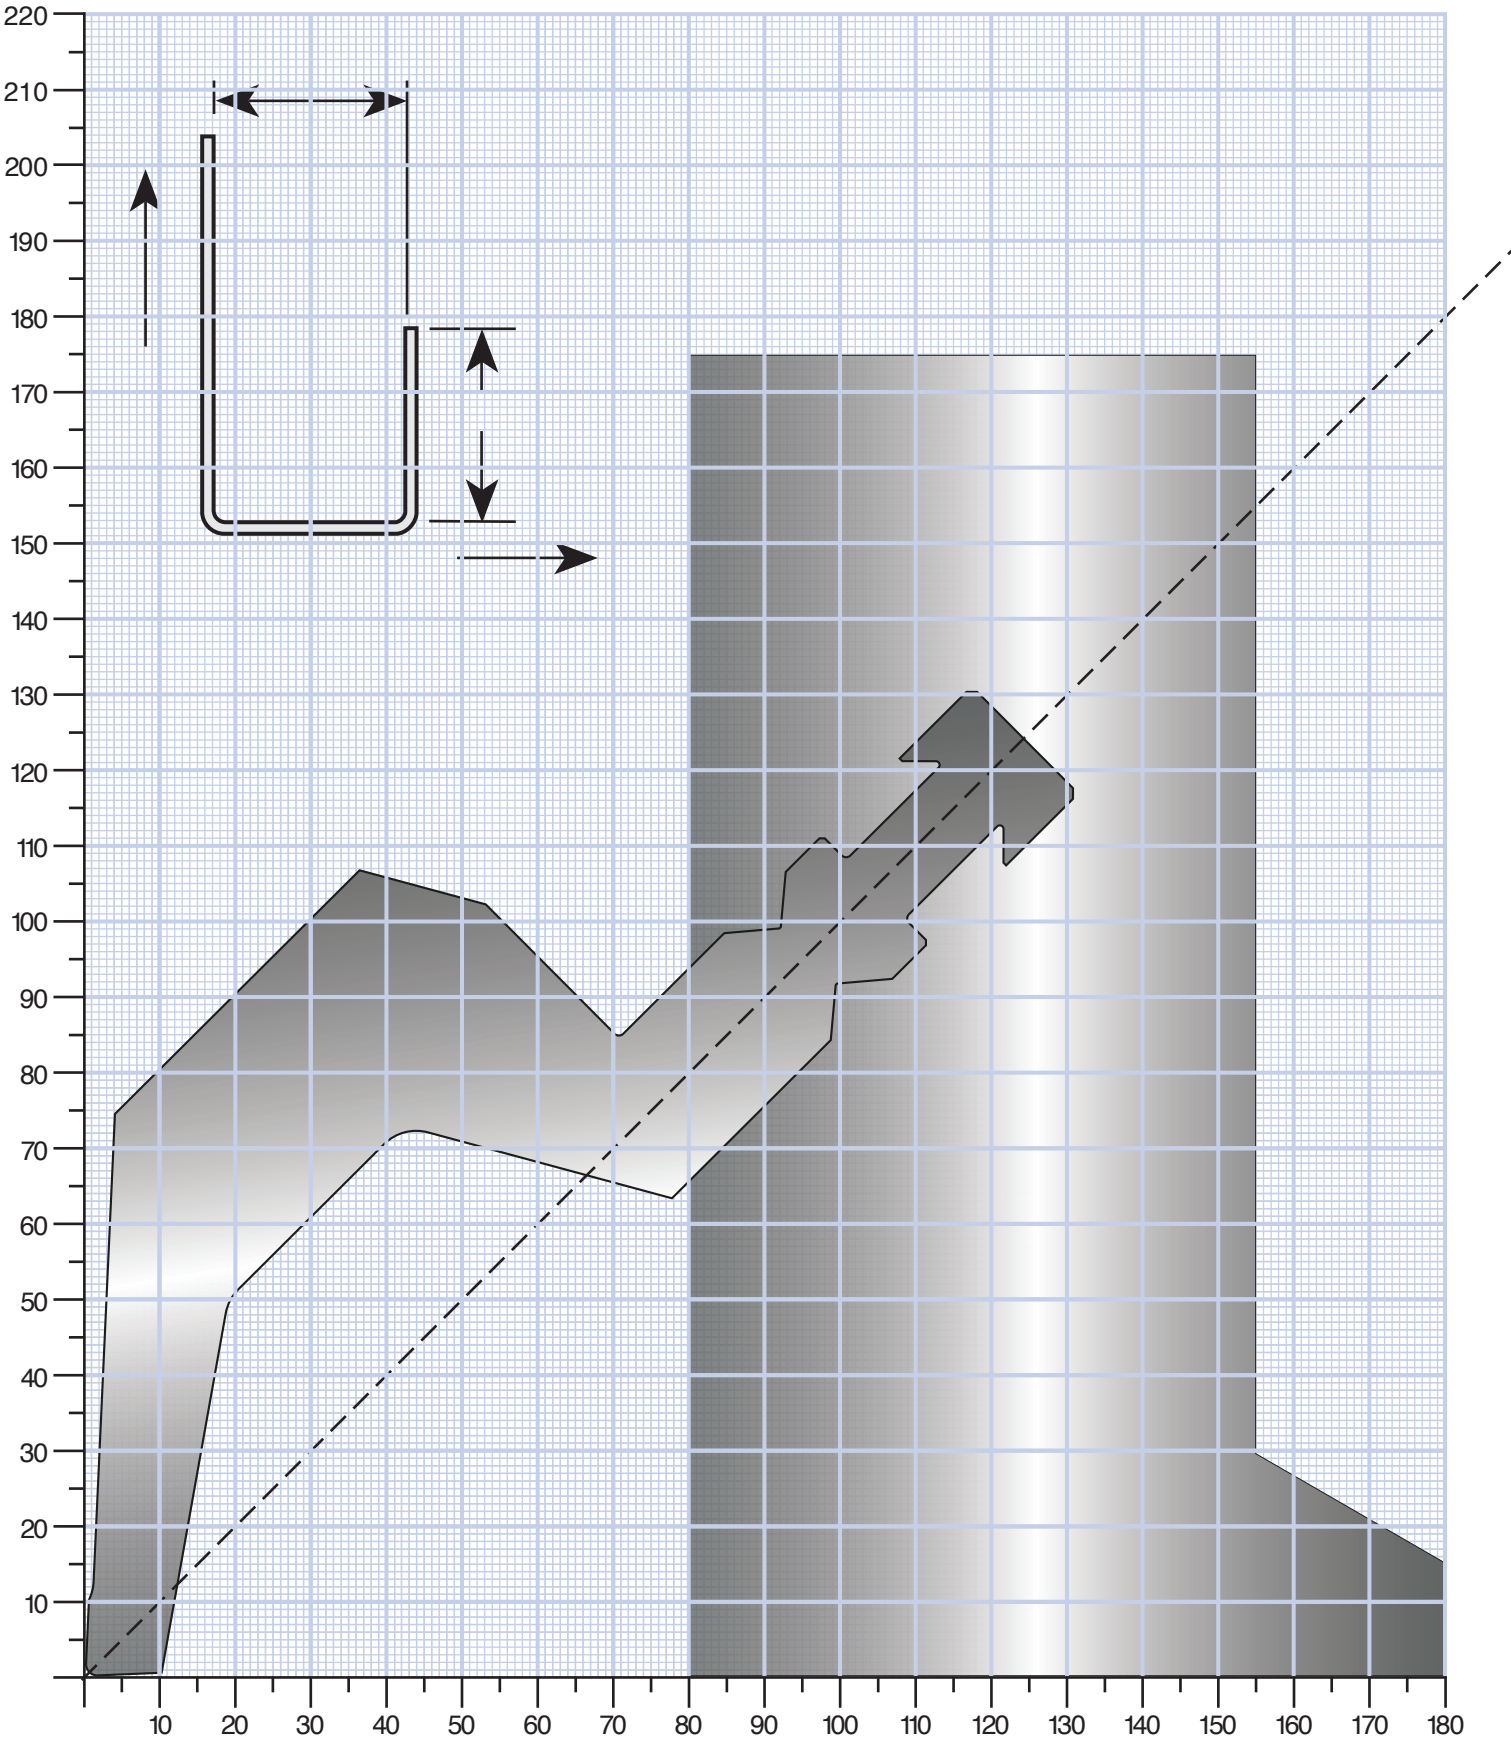


EB1230005, EB1230010, EB1230015, EB1230030 (P5RFA)

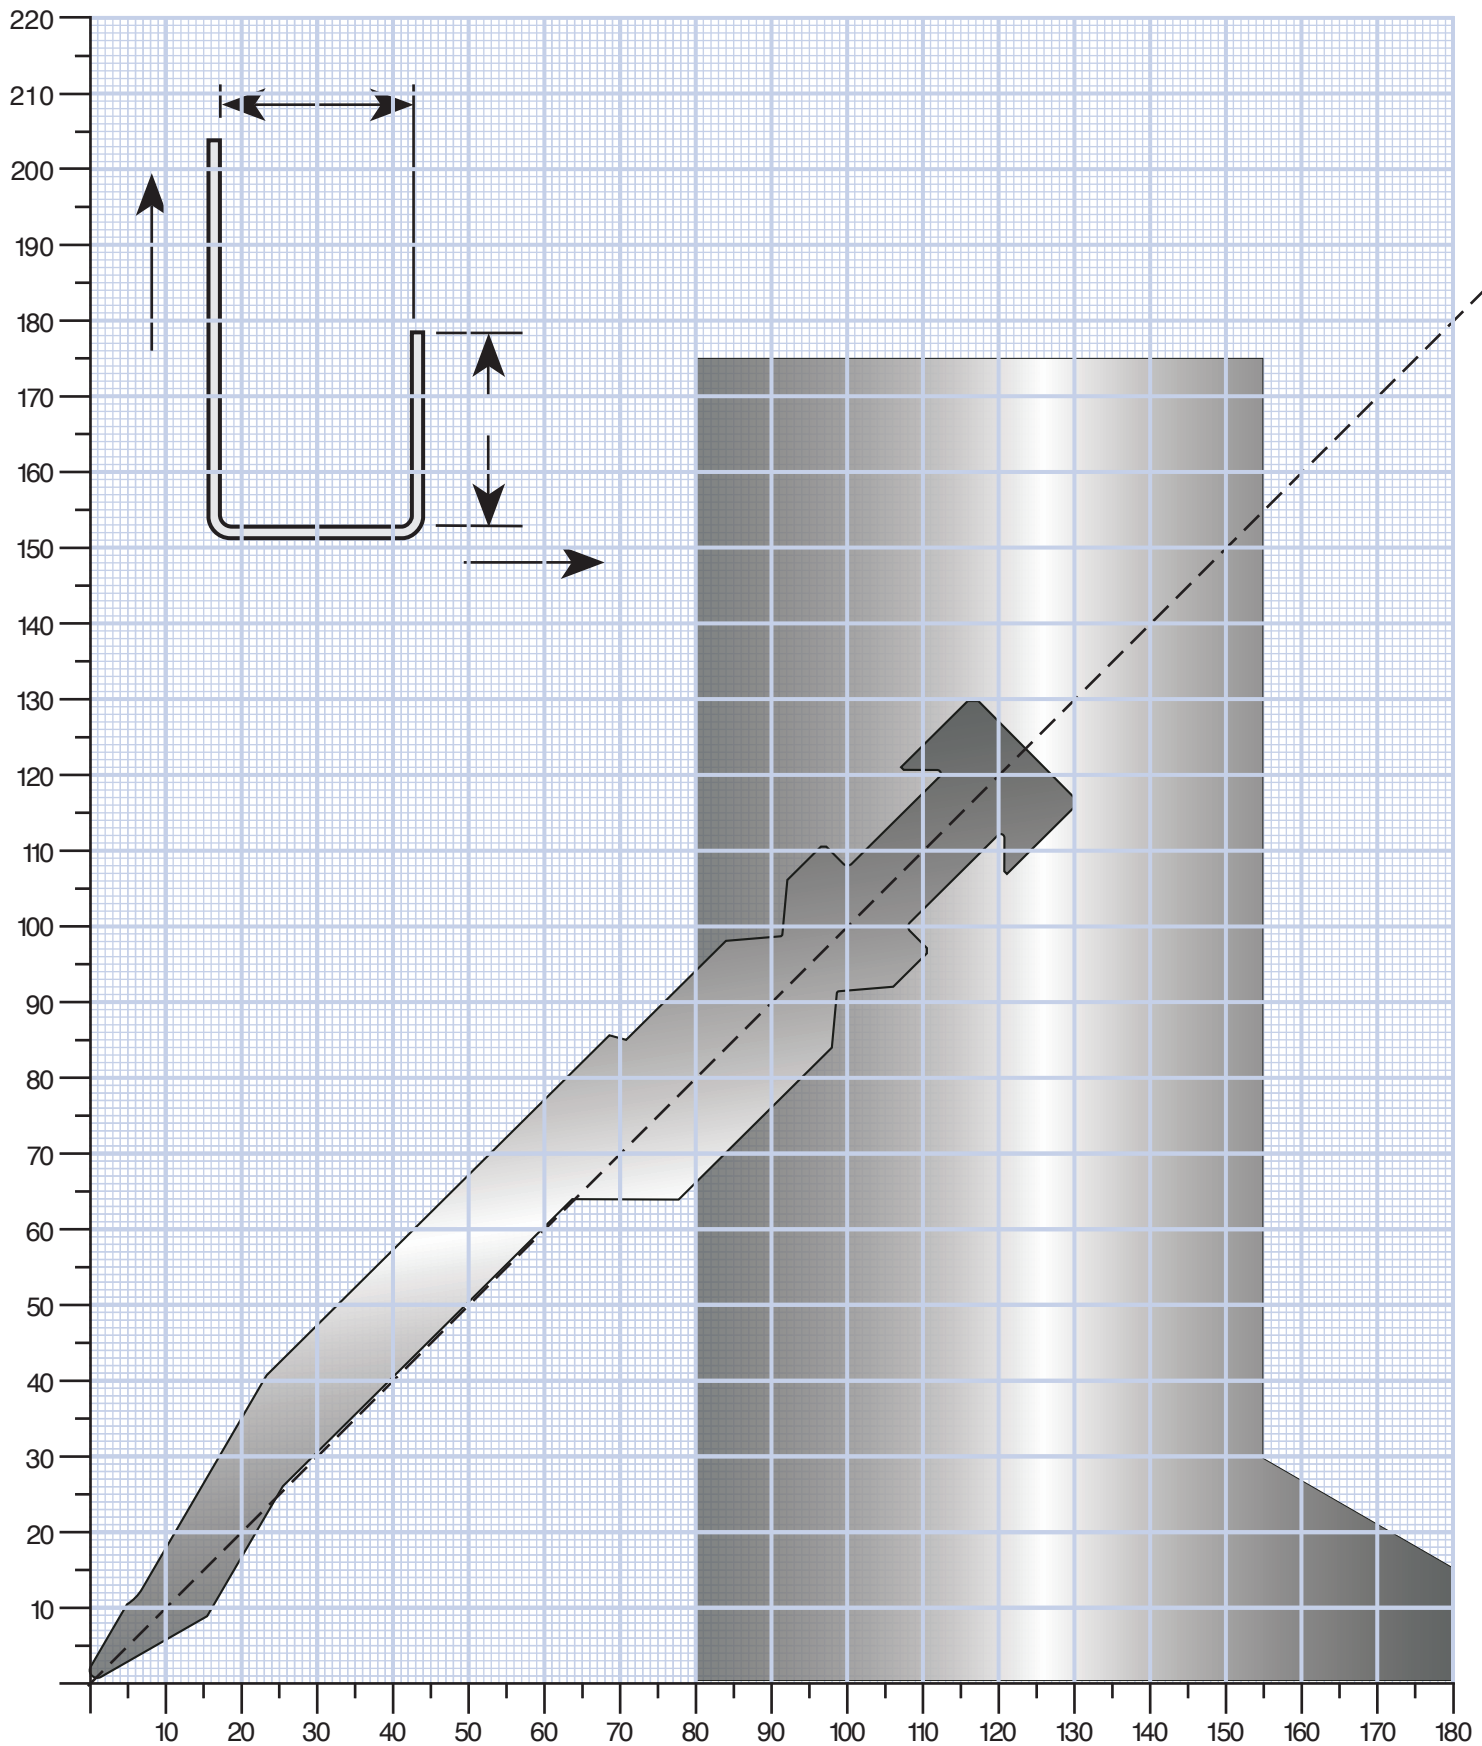


BEND LIMIT GRAPHS FOR PUNCHES HEIGHT 175MM

EB1430010 (P6RFA)

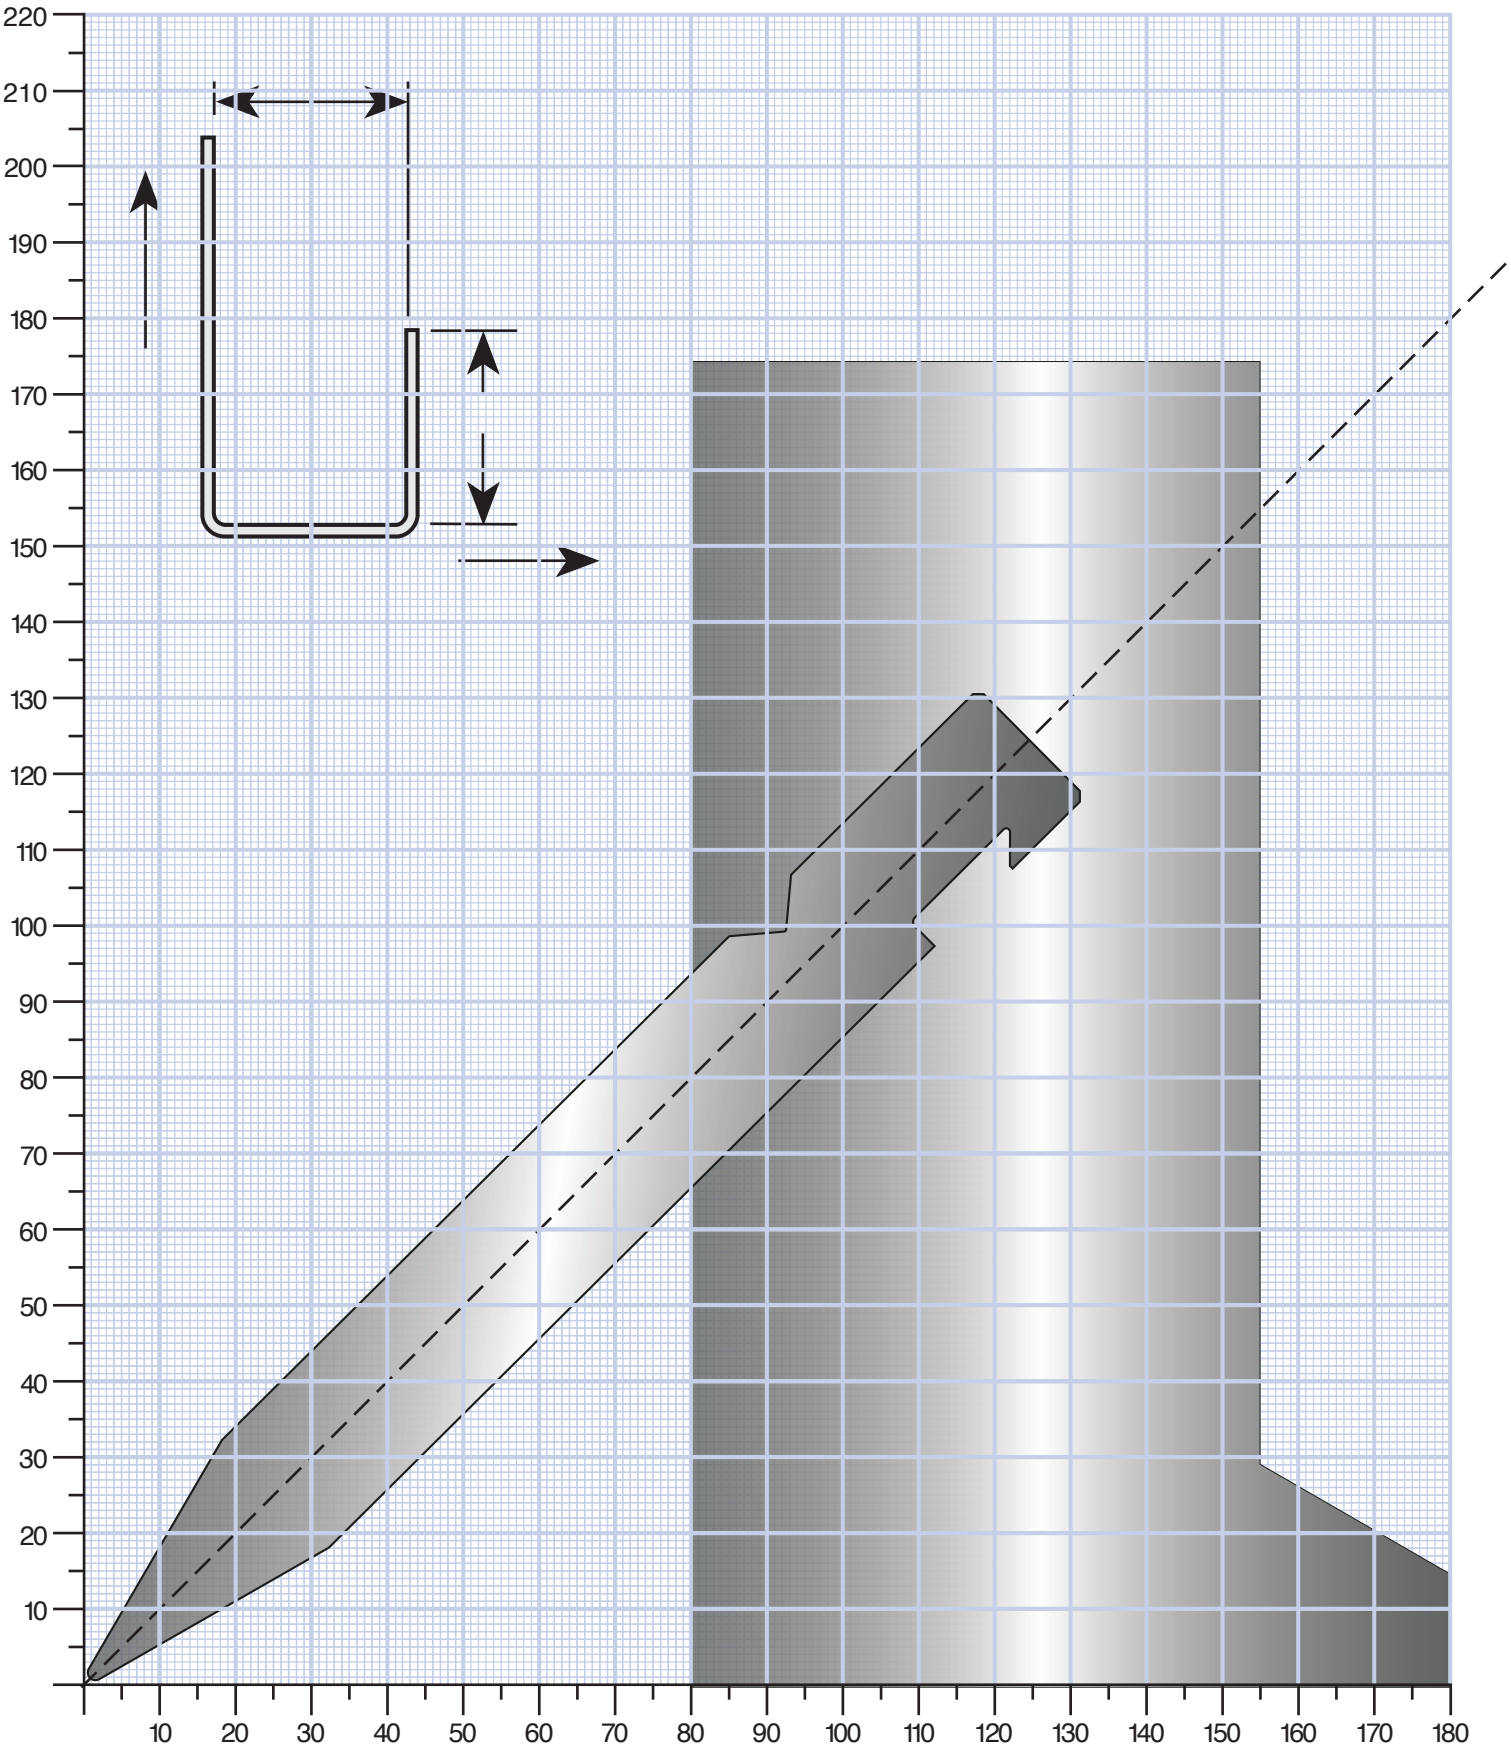


BEND LIMIT GRAPHS FOR PUNCHES HEIGHT 175MM

EB1630030, EB1630050, EB1630060, EB1630080, EB1630100, EB1630120 (P7RFA)

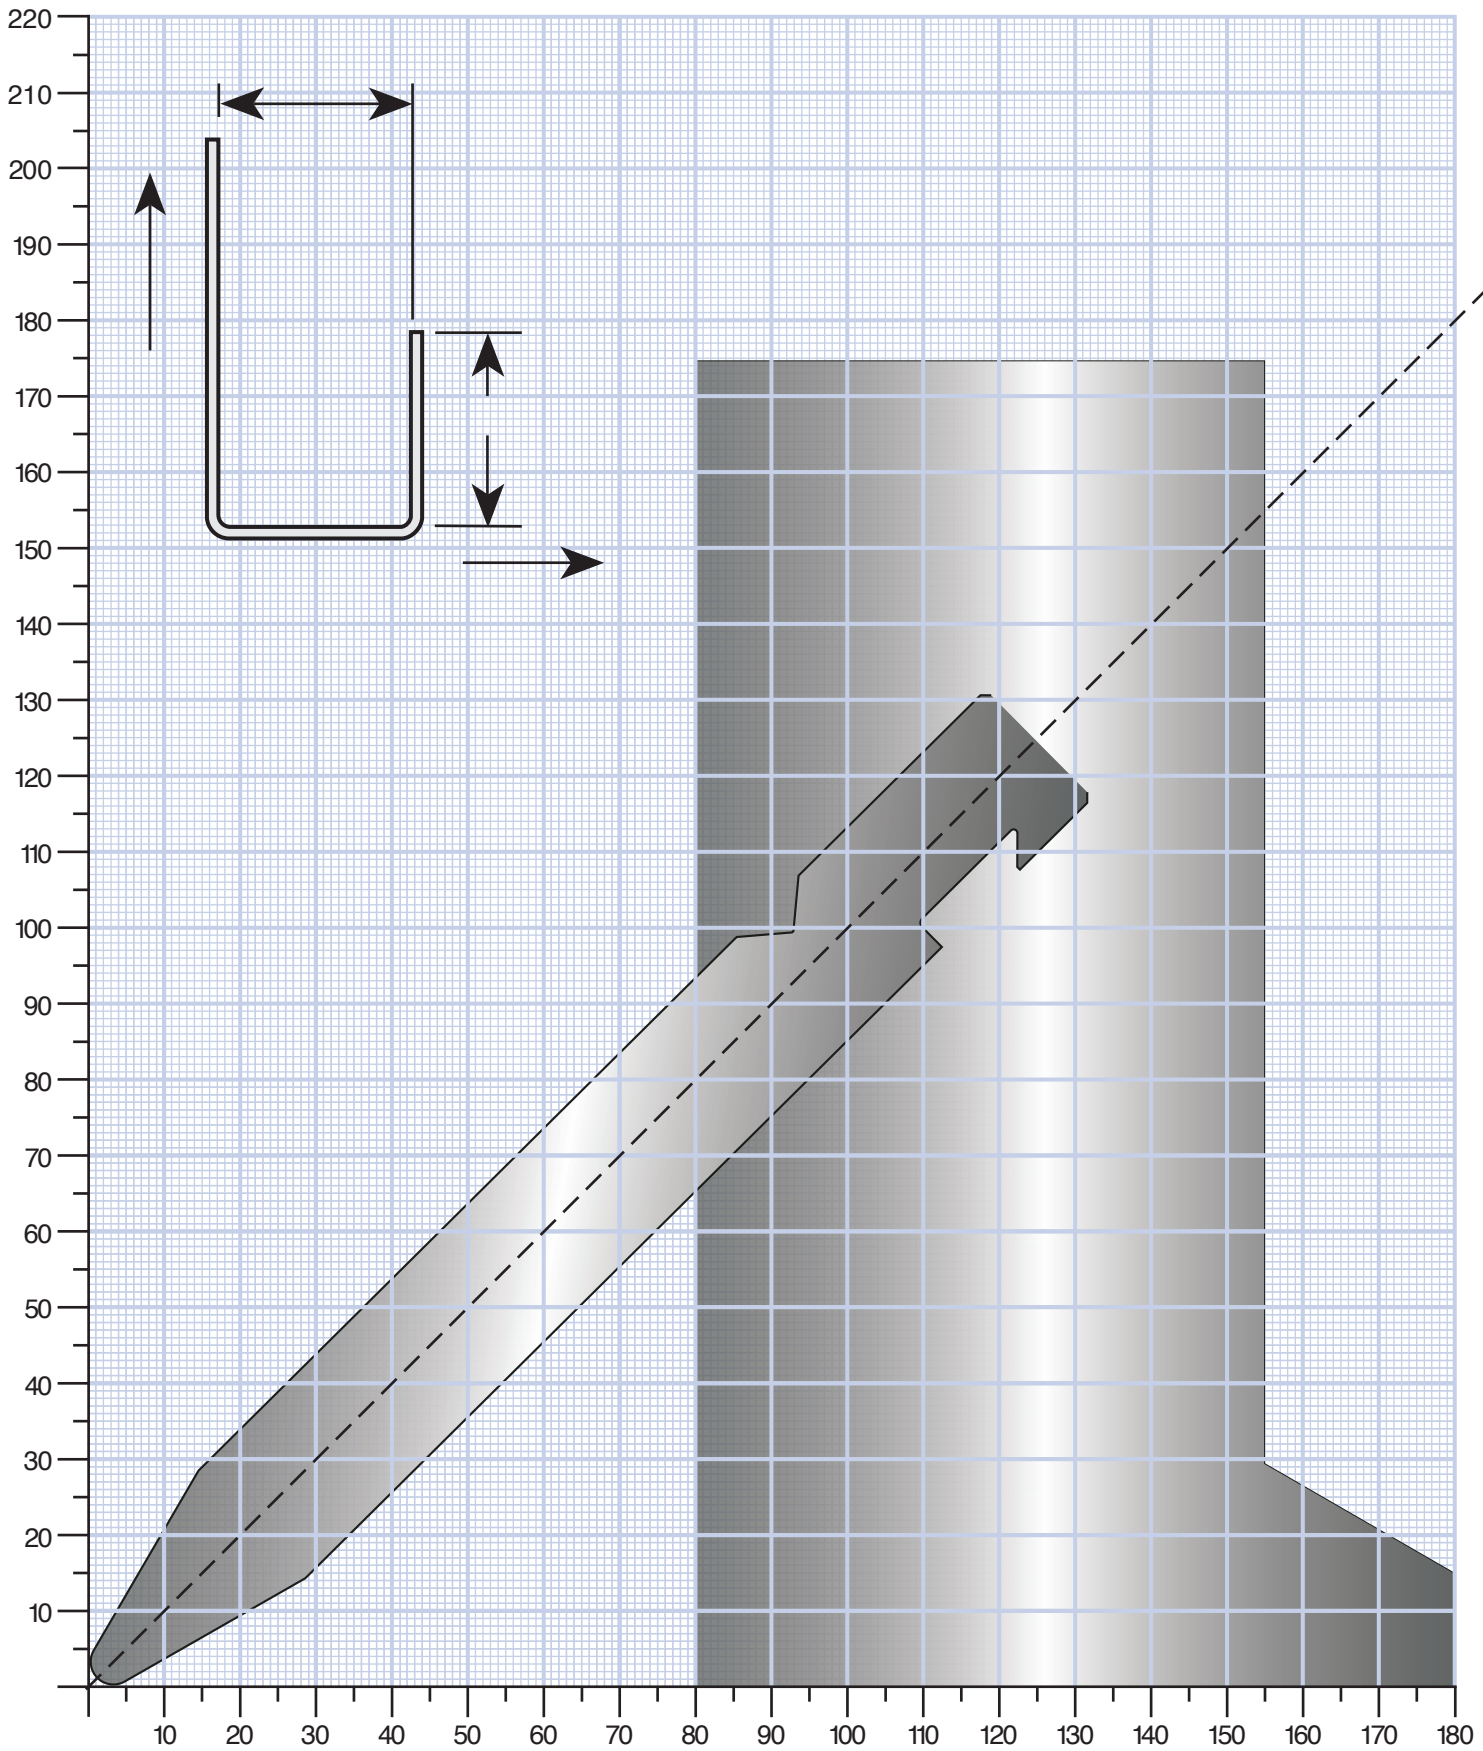


BEND LIMIT GRAPHS FOR PUNCHES HEIGHT 175MM

EB1588010, EB1585010 (P8RFA)

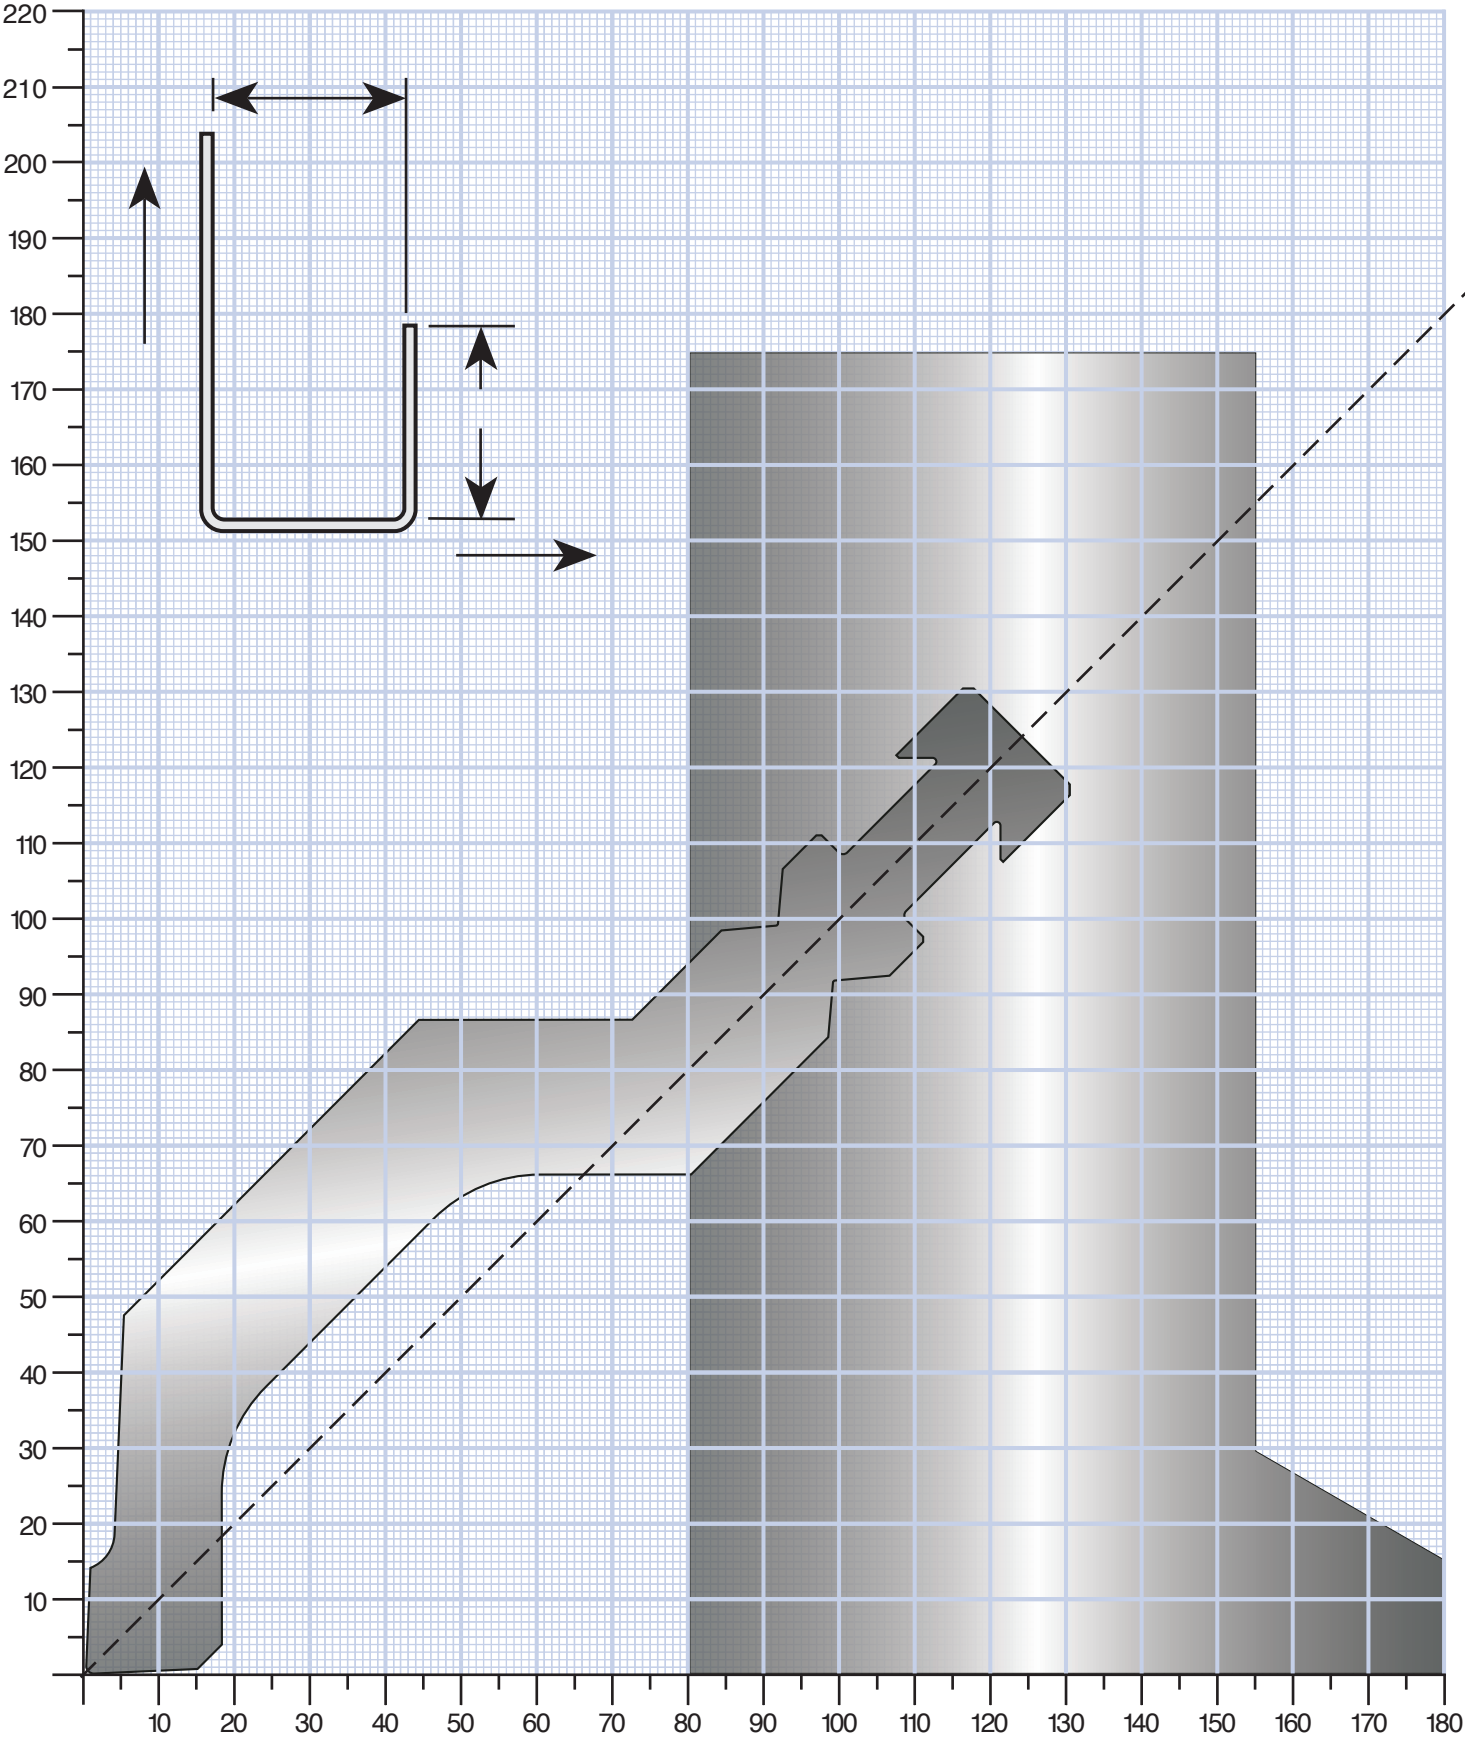


EB1460040 (P9RFA)

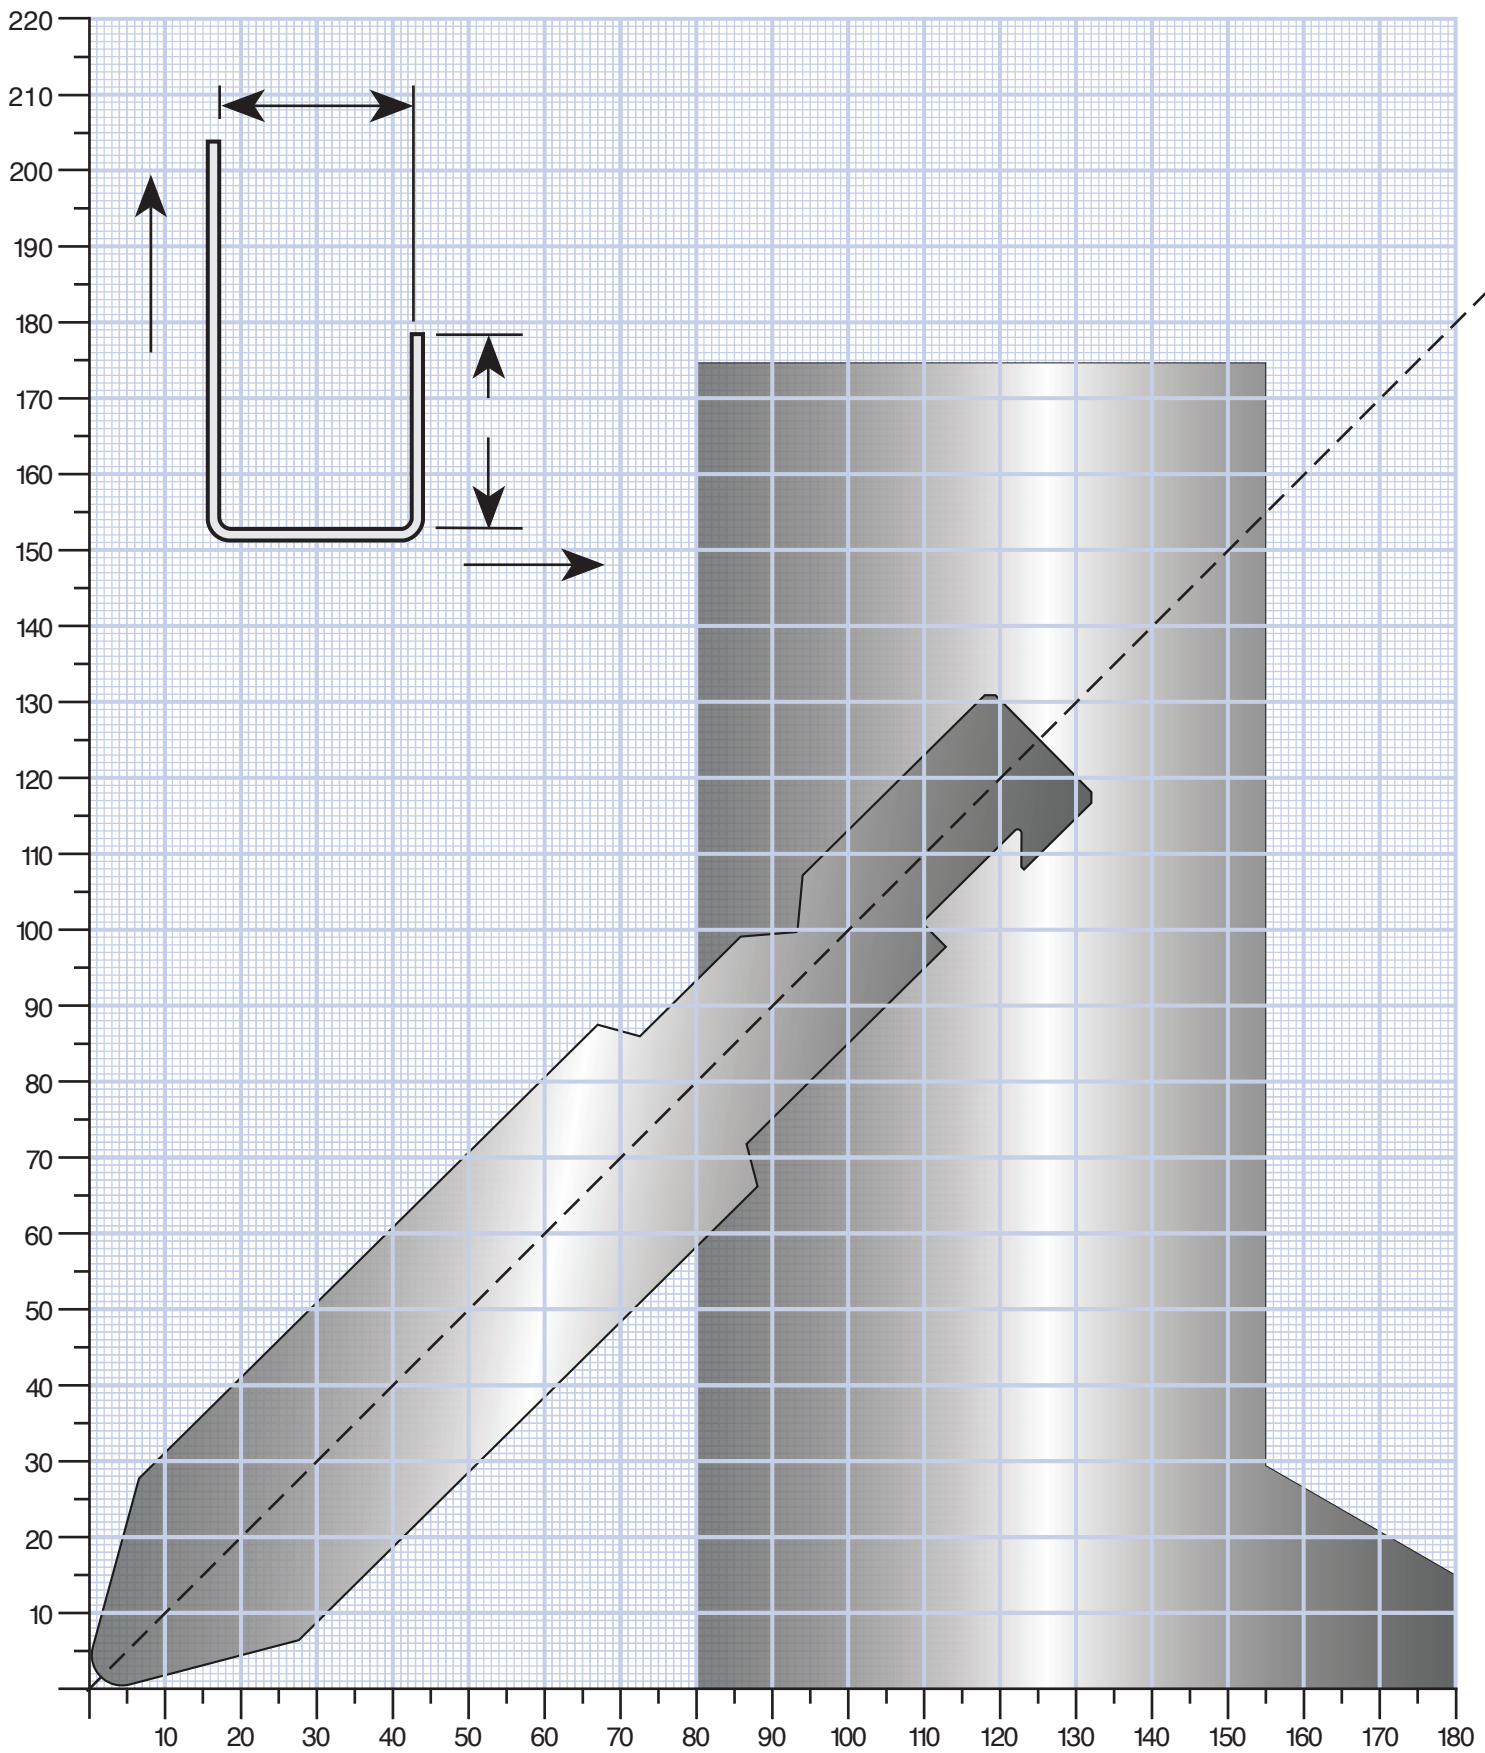


**BEND LIMIT GRAPHS FOR PUNCHES
HEIGHT 250MM**

EB2185005, EB2185010, EB2188005, EB2188010
(P2RFA)

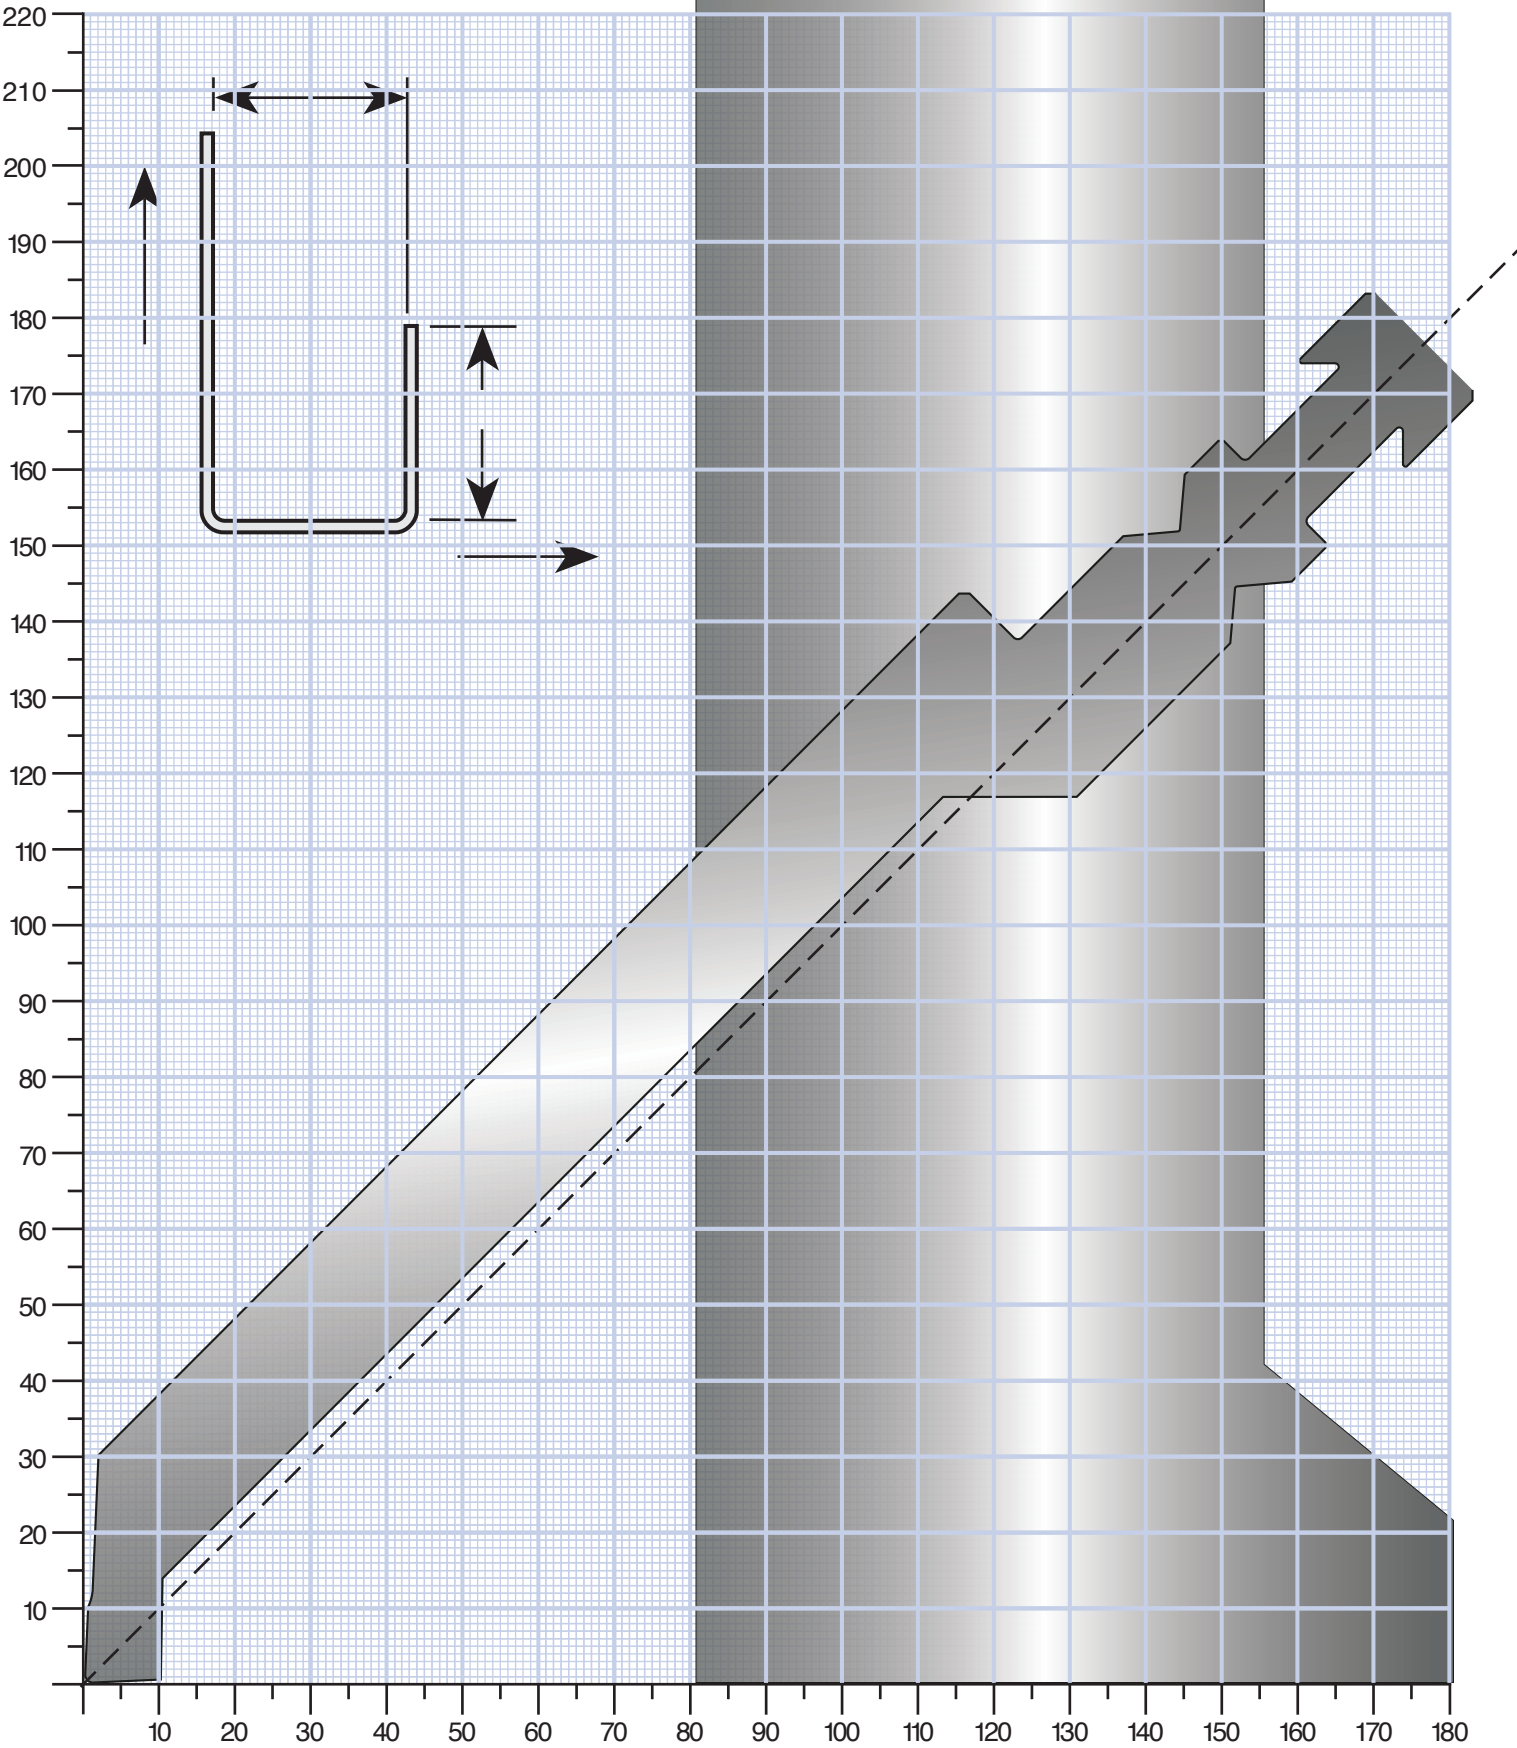


BEND LIMIT GRAPHS FOR PUNCHES HEIGHT 250MM

EB2785010, EB2785030, EB2788010, EB27880330
(P3FA)

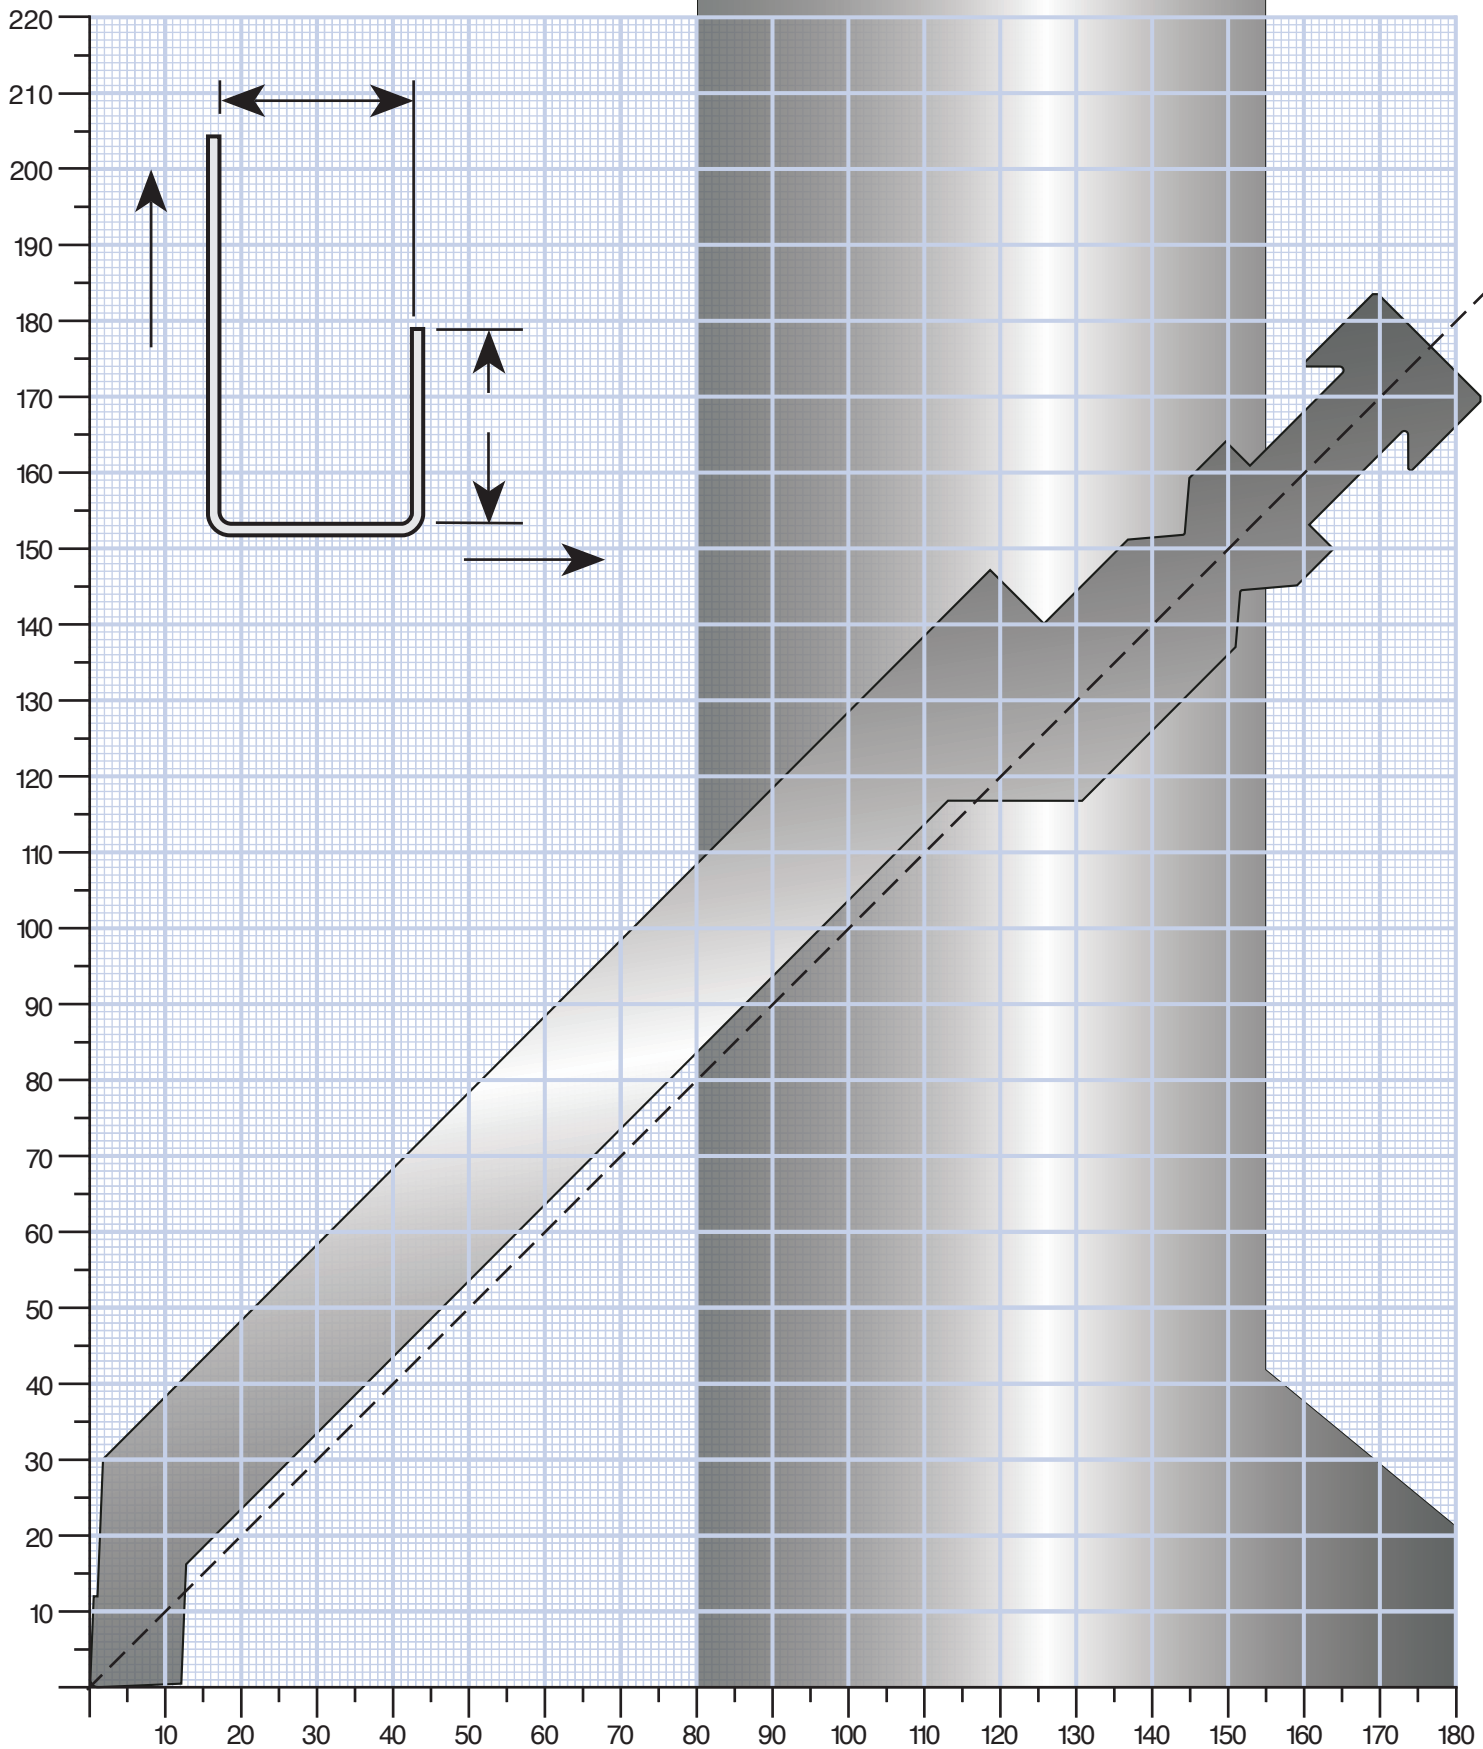


**BEND LIMIT GRAPHS FOR PUNCHES
HEIGHT 250MM**

EB2085005, EB2085010, EB2085015, EB2085030
EB2088005, EB2088010, EB2088015, EB2088030
(P4RFA)

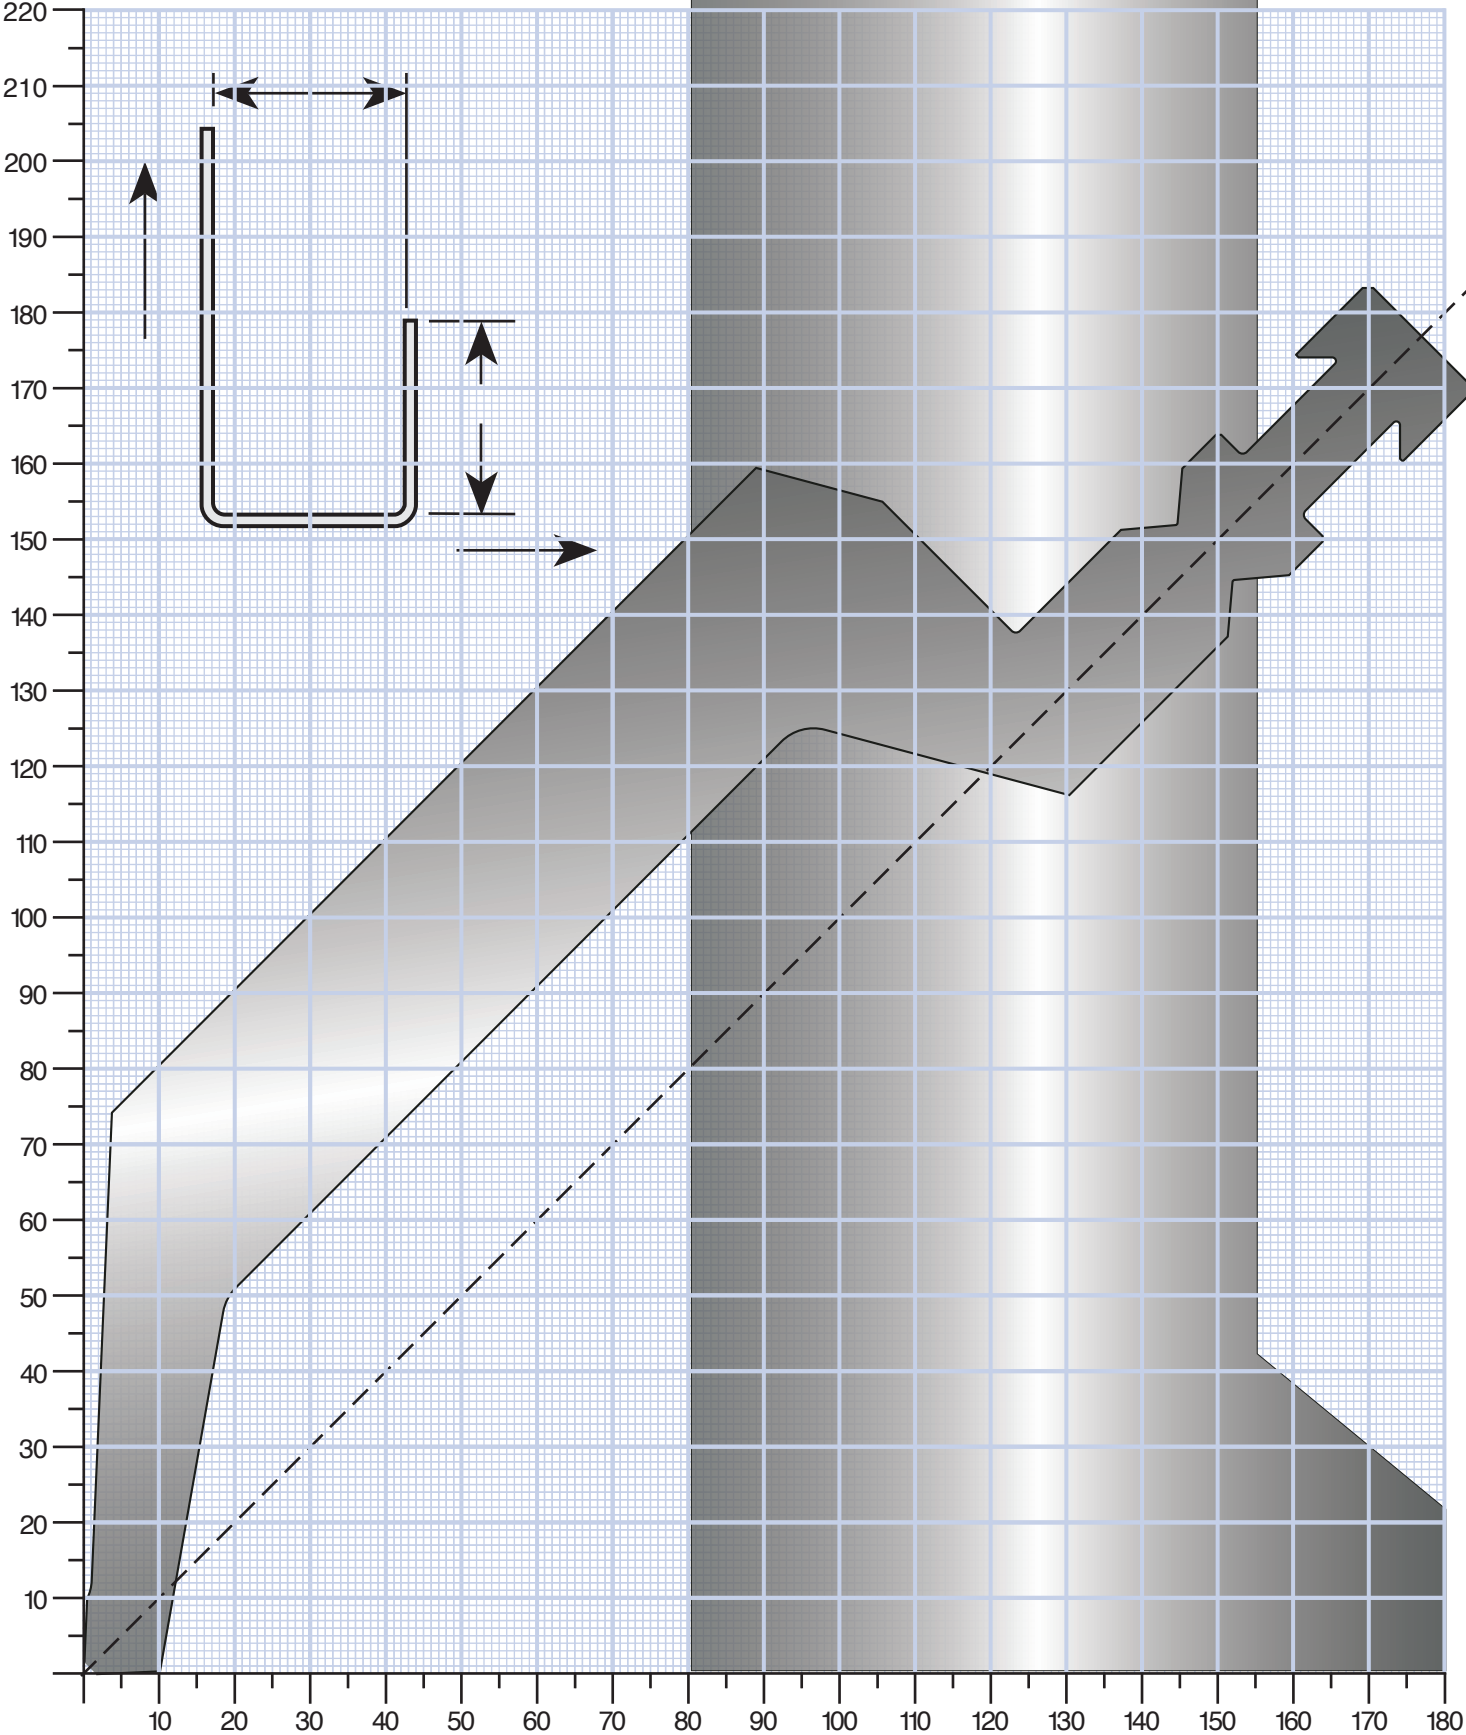


BEND LIMIT GRAPHS FOR PUNCHES HEIGHT 250MM

EB2230005, EB2230010, EB2230015, EB2230030
(P5RFA)

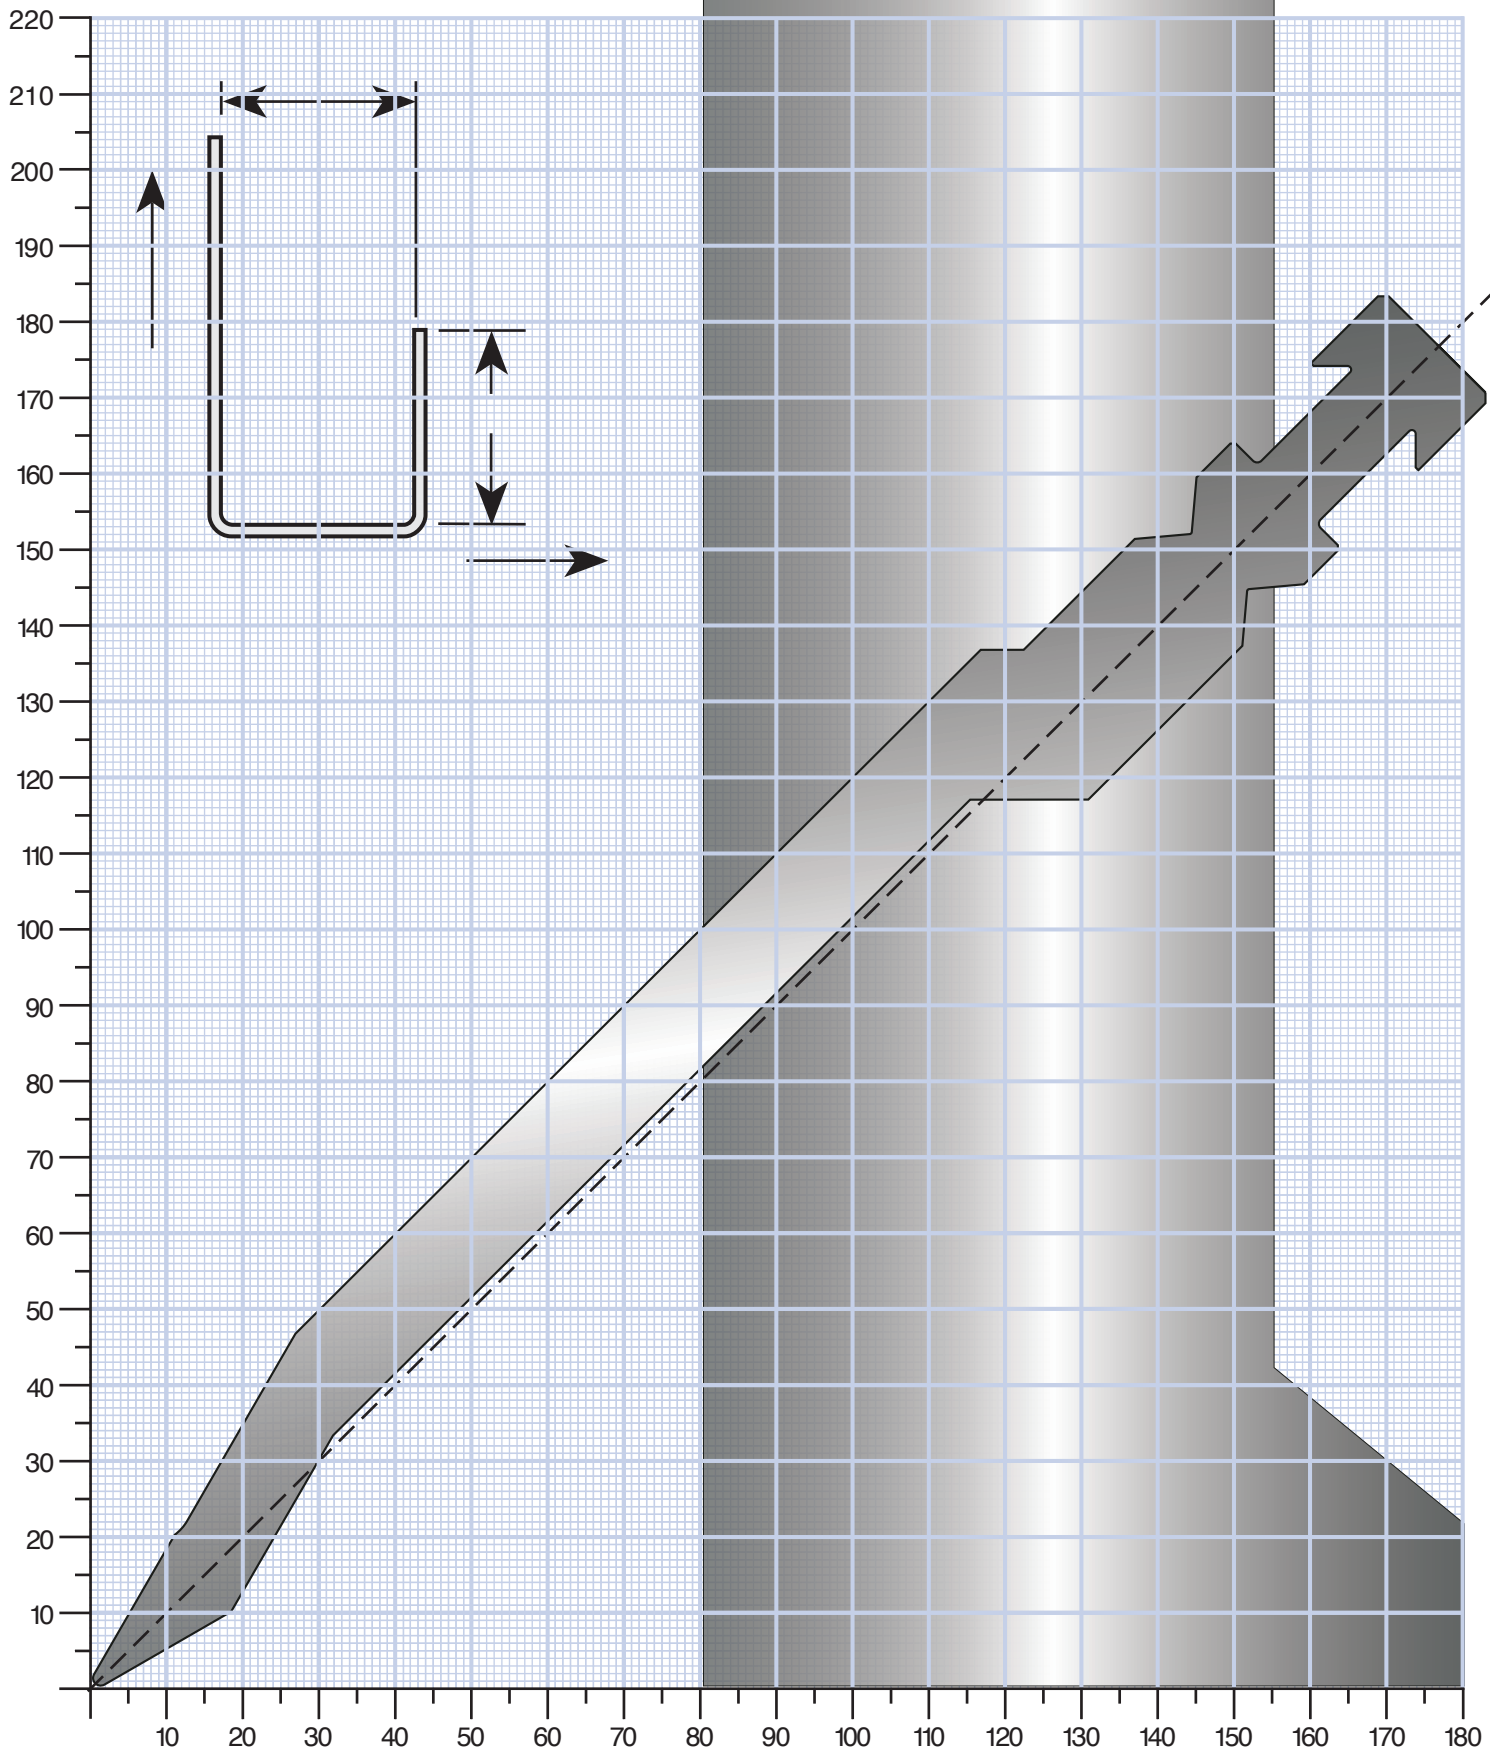


**BEND LIMIT GRAPHS FOR PUNCHES
HEIGHT 250MM**

EB2430010 (P6RFA)

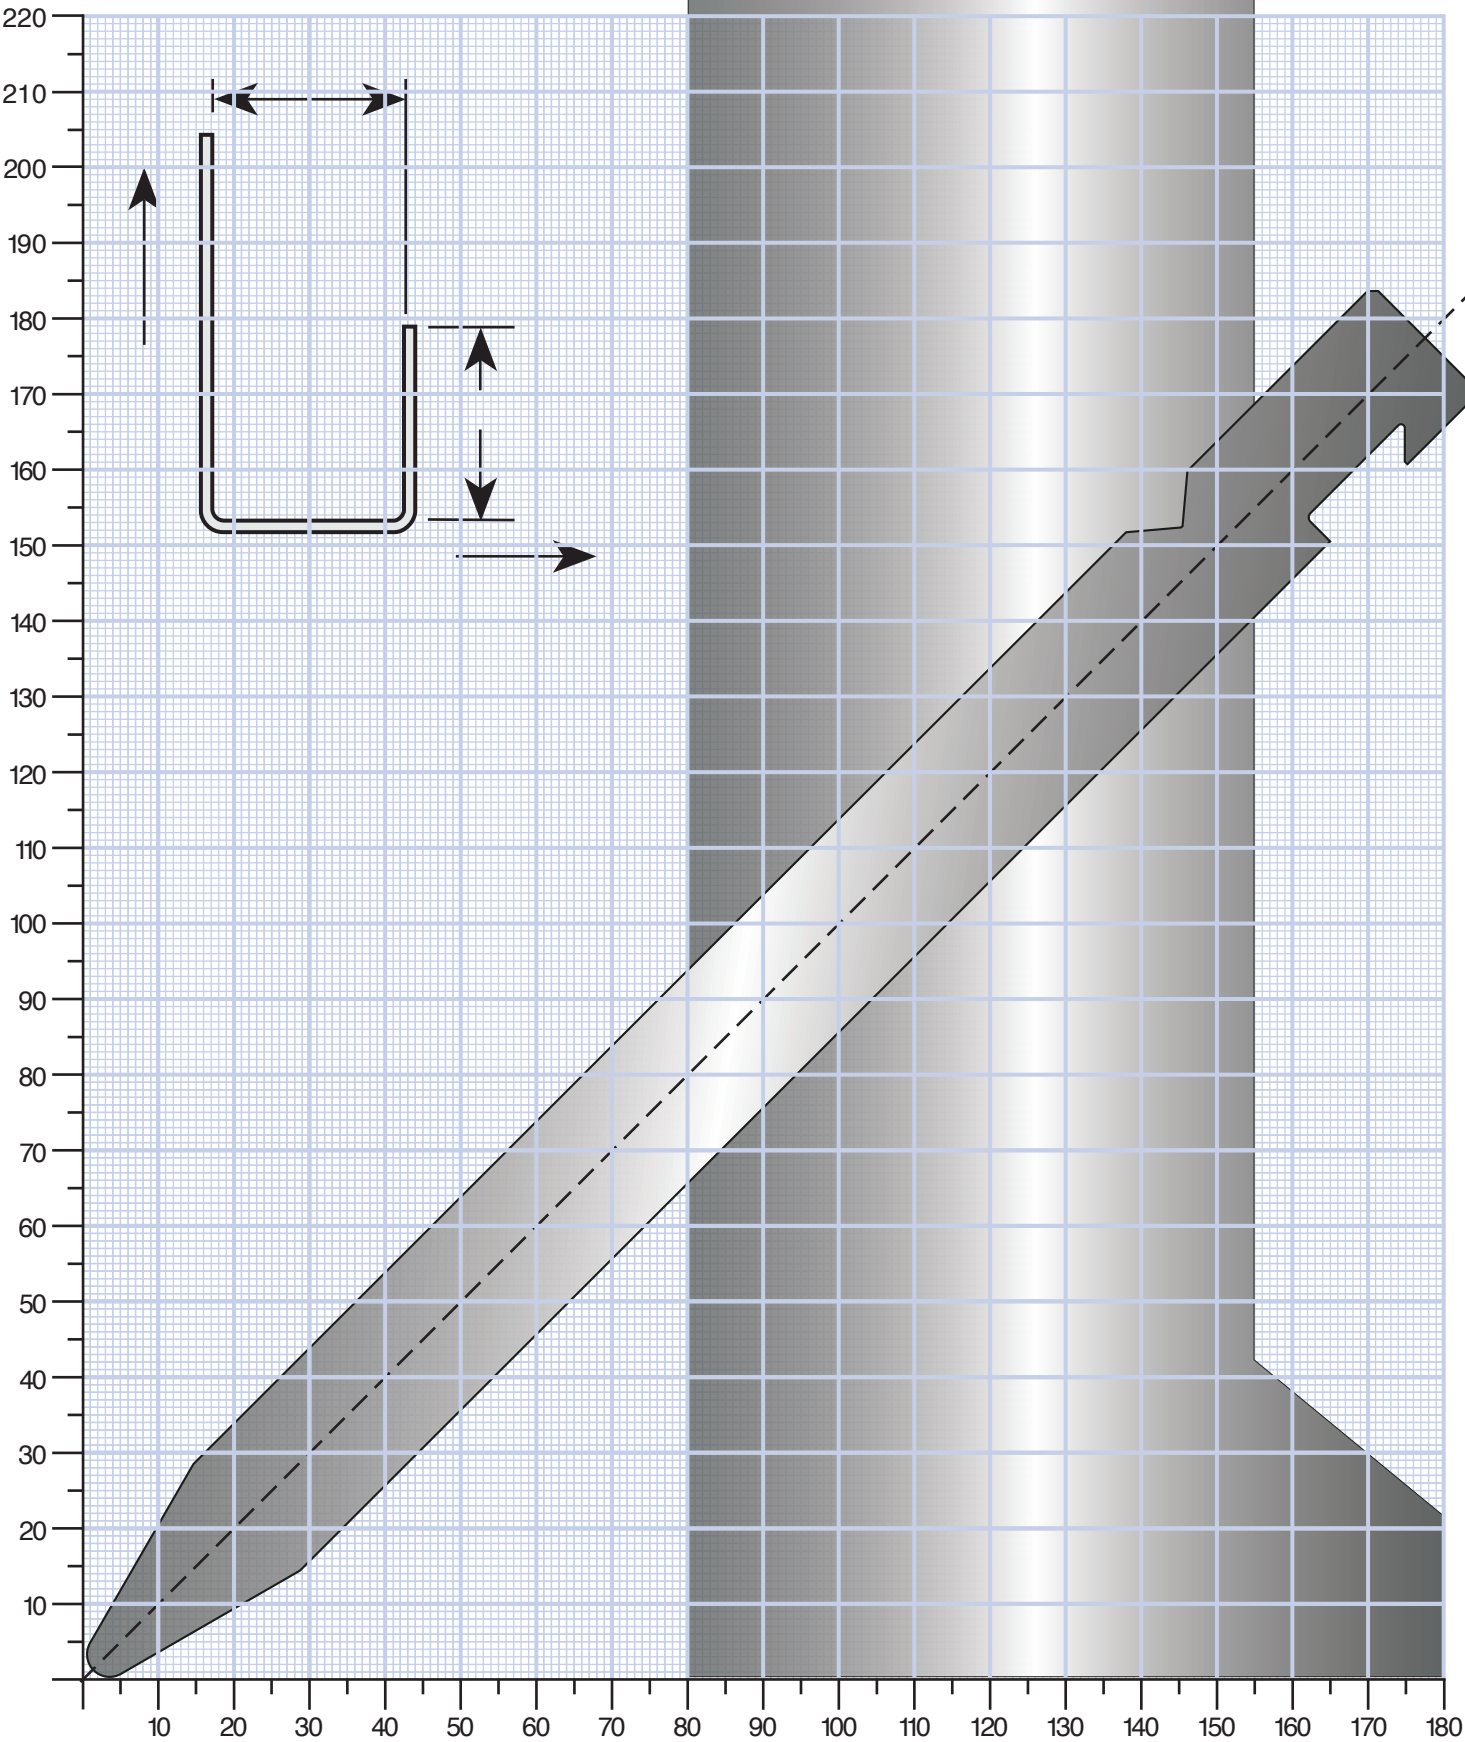


BEND LIMIT GRAPHS FOR PUNCHES HEIGHT 250MM

EB2630030, EB2630050, EB2630060, EB2630080
EB2630100, EB2630120 (P7RFA)

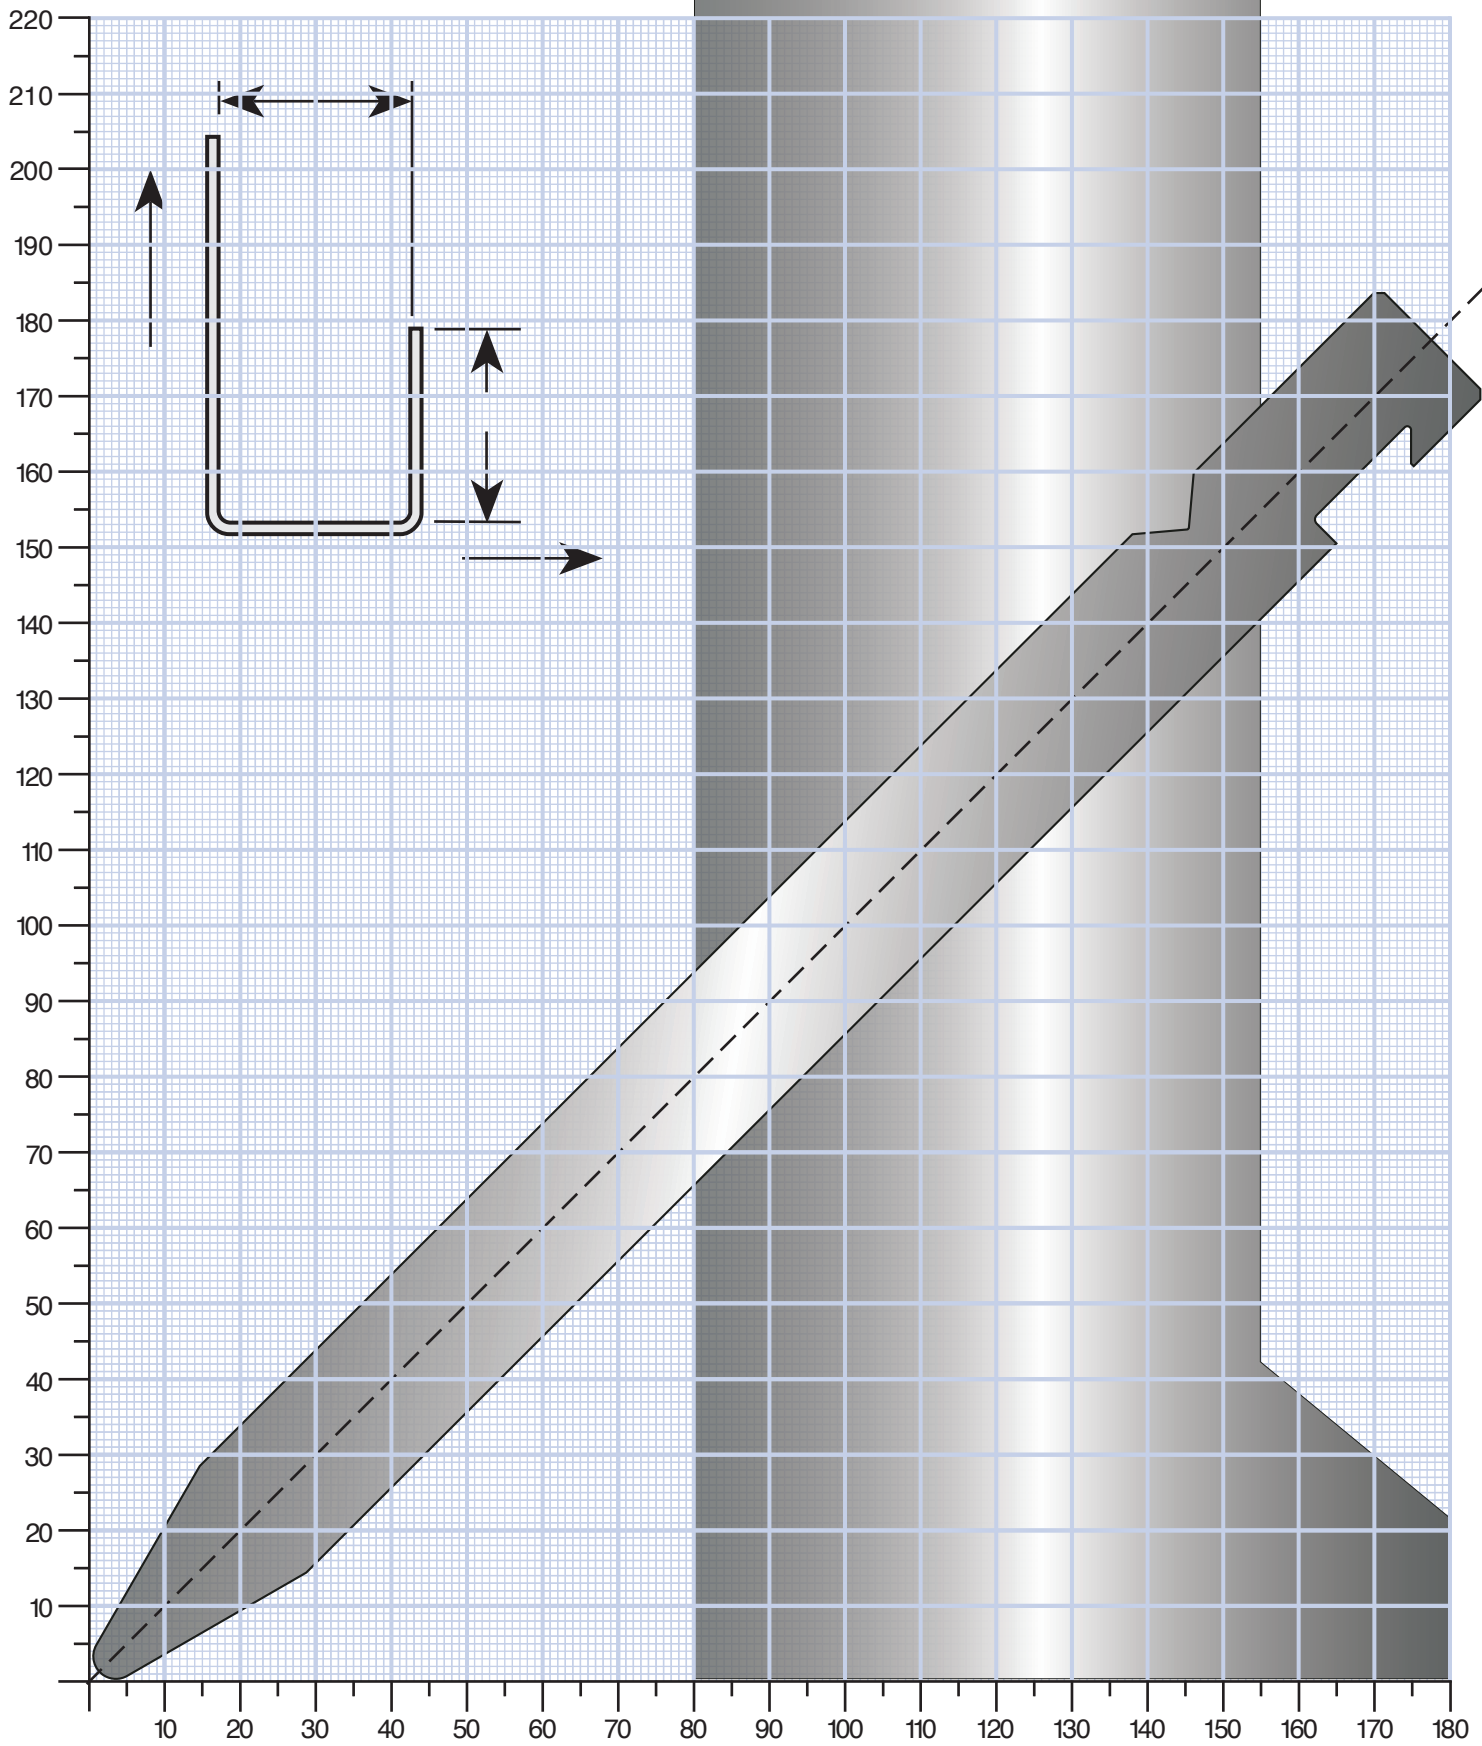


**BEND LIMIT GRAPHS FOR PUNCHES
HEIGHT 250MM**

EB2585010 (P8RFA)

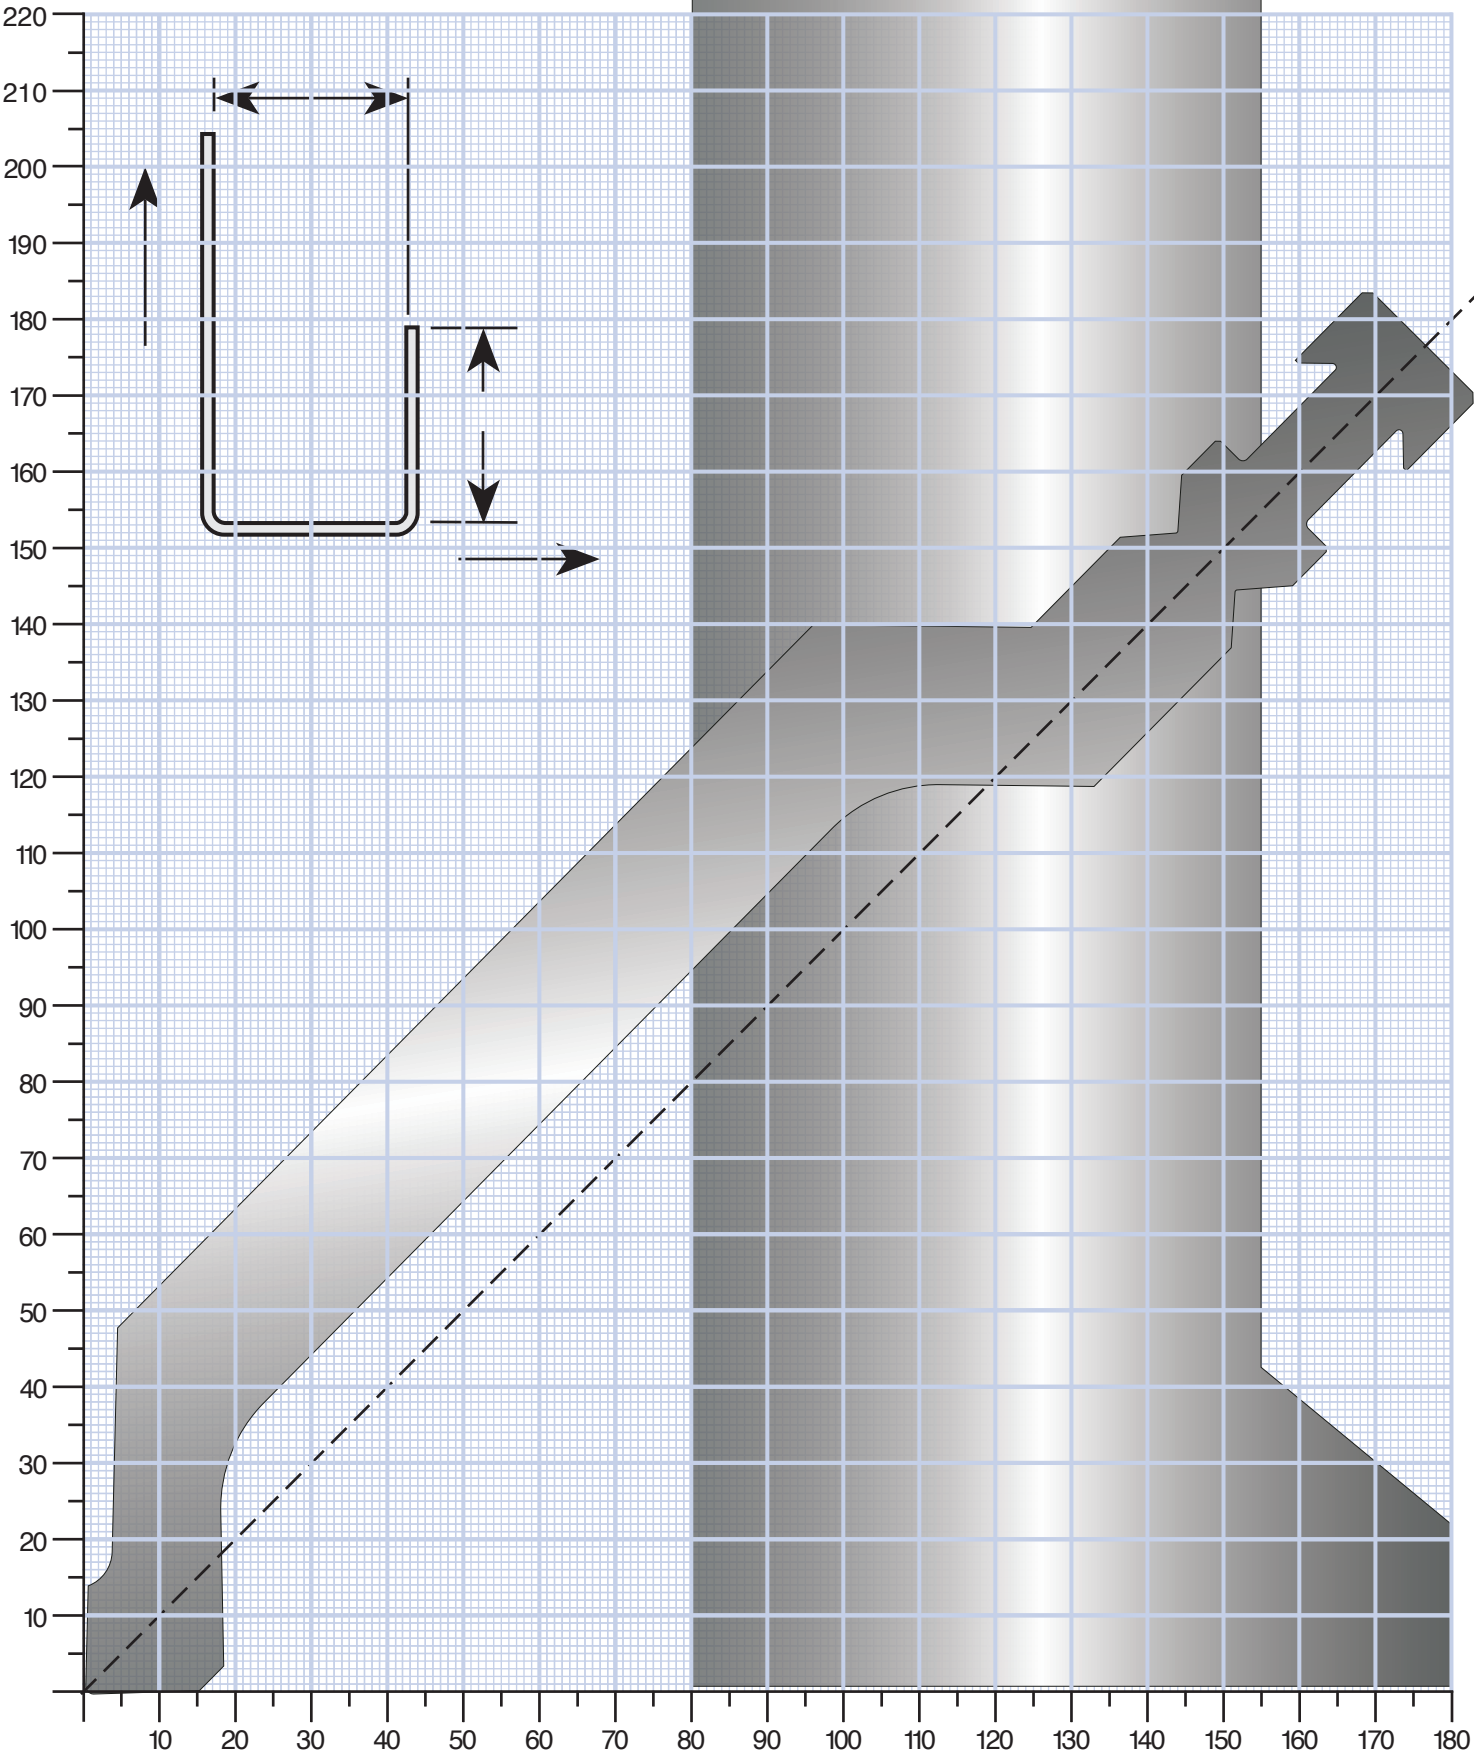


BEND LIMIT GRAPHS FOR PUNCHES HEIGHT 250MM

EB2460040 (P9RFA)

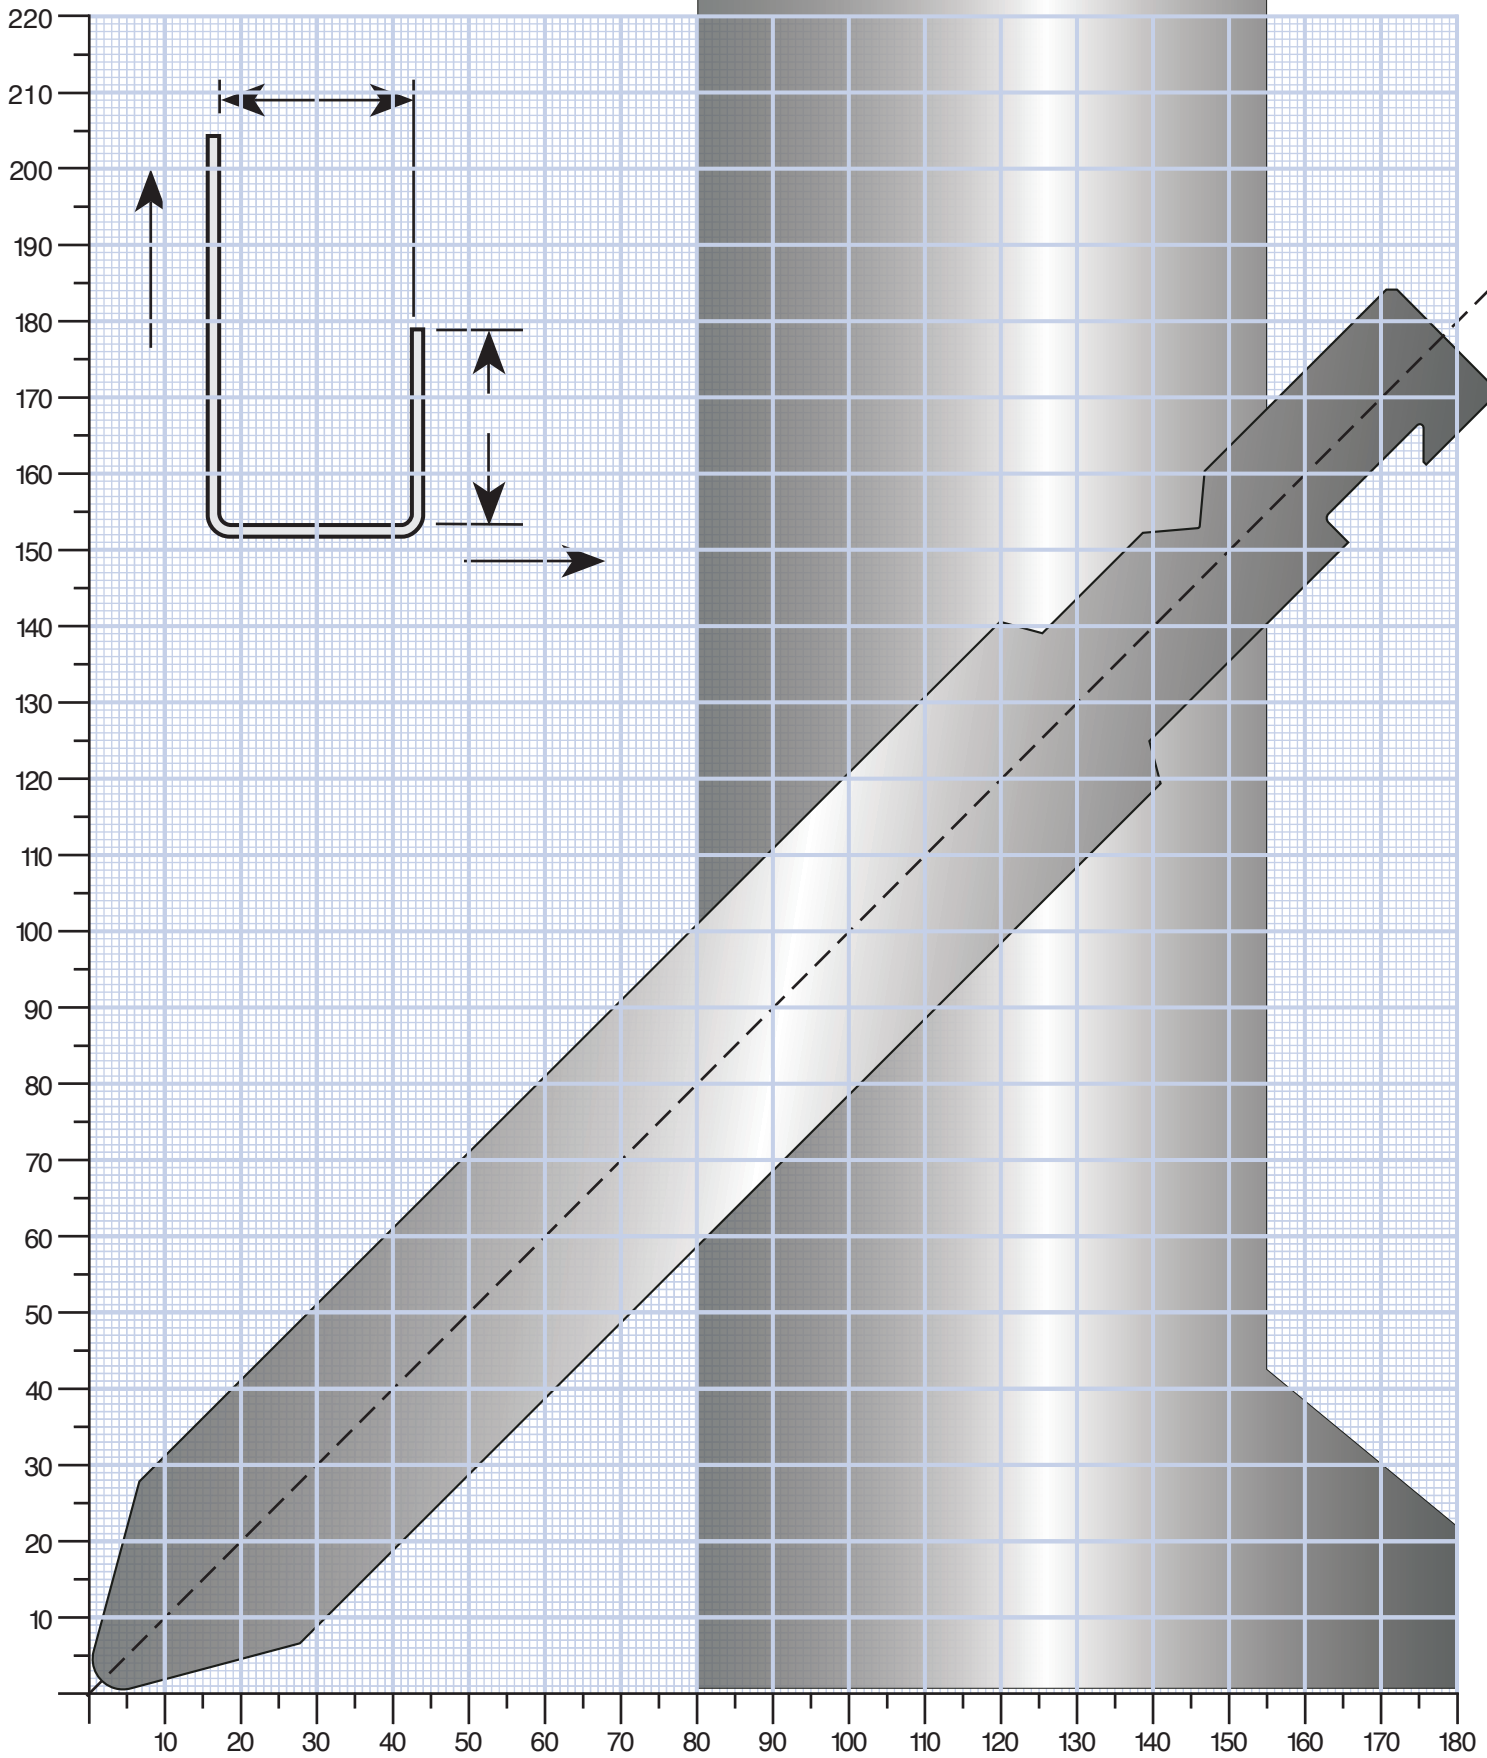


BEND LIMIT GRAPHS FOR HEMMING PUNCHES

EB0330010-6, EB0330010-8, EB0330010-10, EB0330010-12
EB1330010-6, EB1330010-8, EB1330010-10, EB1330010-12

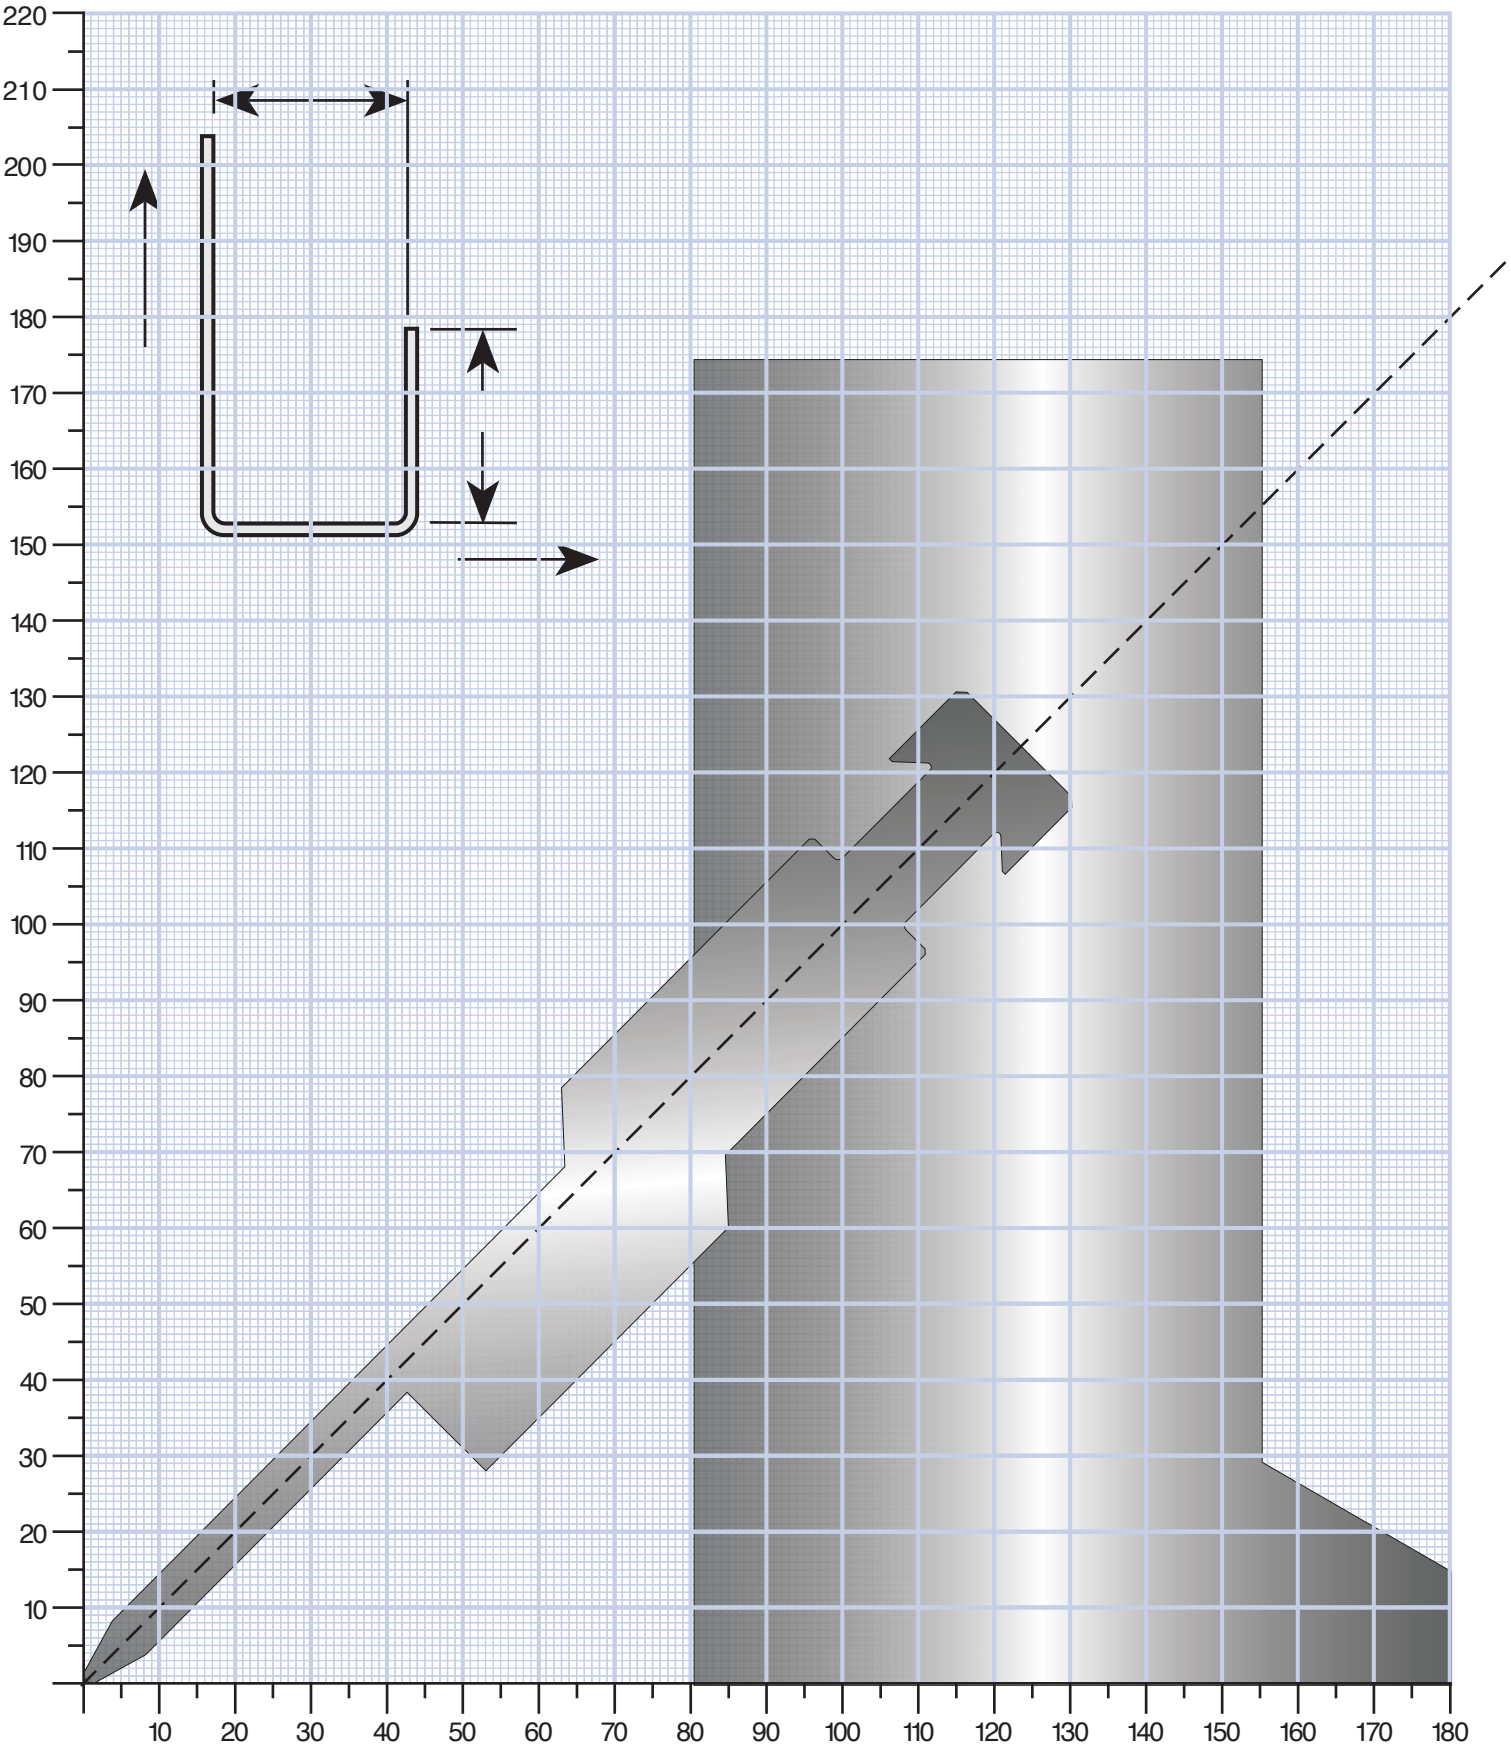


EB2330010-6, EB2330010-8,
EB2330010-10, EB2330010-12

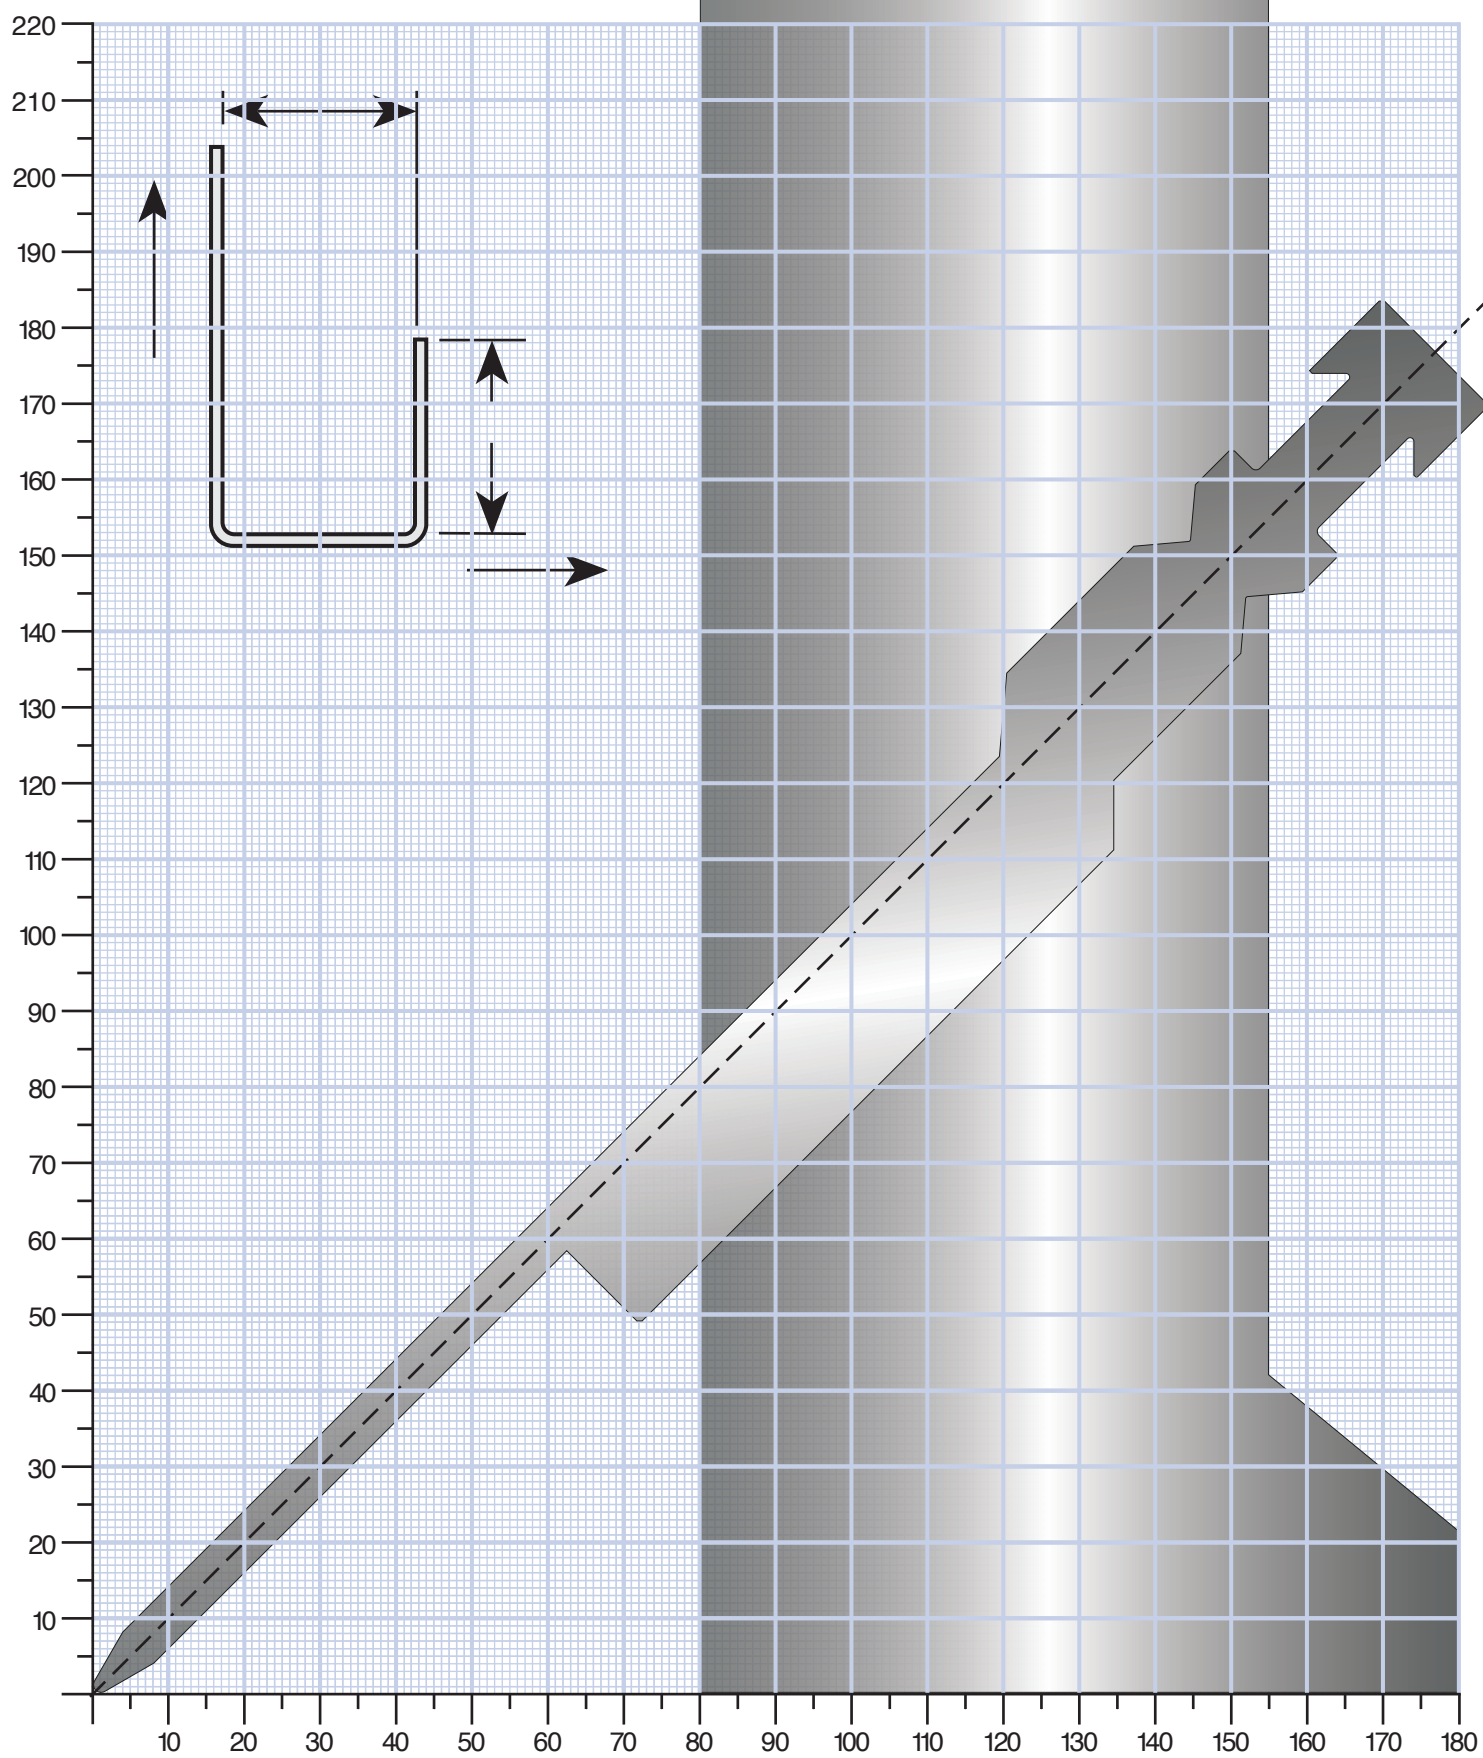

Air Bending Force Chart Metric

STANDARD FORMULAS FOR SELECTING A V-OPENING MATERIAL THICKNESS			
2.6mm OR LESS	=	T x 6	Note: The formulas are for reference only. For more specific information, please refer to the chart below. Chart below is for mild steel.
3.0mm-8.0mm	=	T x 8	
9.0mm-12.0mm	=	T x 10	
14.0mm and THICKER	=	T x 12	

TONNAGE REQUIRED FOR MILD STEEL			
Soft Brass	x	0.5	
Soft Aluminium	x	0.5	
Heat Treated Aluminium Alloys	x	1	
Stainless Steel	x	1.5	



FIGURES BASED ON MILD STEEL																							
	V (mm)	4	6	7	8	10	12	14	16	18	20	22	25	32	40	50	63	80	100	125	160	200	250
		2.8	4.2	4.9	5.6	7.0	8.6	10.1	11.5	13.0	14.4	*15.8	18.0	24.0	30.0	37.5	47.3	60.0	75.0	96.3	123.2	154.0	192.5
		0.7	1.0	1.2	1.3	1.7	2.0	2.3	2.7	3.0	3.3	3.7	4.2	5.3	6.7	8.3	10.5	13.3	16.7	20.8	26.7	33.3	41.7
	4.5	2.8																					
	6.0	4.2	3.3	3.2																			
																						</	

• T = MATERIAL THICKNESS • V = V-OPENING • MF = MINIMUM FLANGE LENGTH • IR = INSIDE RADIUS

The bending force (tonnage) figures listed above are based on mild steel with a tensile strength of 45-50 kilograms per square millimetre. To calculate the approximate bending force (tonnage) requirements for other materials, please use the multipliers listed.

Note: * Based on bending to an included angle of 88 degrees. This dimension will increase when bending to an included angle of less than 88 degrees.









WILSON TOOL INTERNATIONAL (EUROPE) LTD.

WORLD HEADQUARTERS

Wilson Tool International - United States

Tel (Free): 800-328-9646 | Tel: 651-286-6001
Email: bending@wilsontool.com

NORTH AMERICA

Wilson Tool - Canada

Punching and Stamping Division
Tel: 800-268-5573
Email: punching@wilsontoolcanada.com

Wilson Tool - Canada

Press Brake Division
Tel: 800-268-4180
Email: bending@wilsontoolcanada.com

Wilson Tool - Mexico

Tel: (81) 1665 1249
Email: punzonado@wilsontool.com

SOUTH AMERICA

Wilson Tool - Brazil

Tel: 55 11 5624-2444
Email: vendas@wilsontool.com.br

EUROPE / MIDDLE EAST / AFRICA

Wilson Tool - United Kingdom

Tel (Free): 0800-373748 | Tel: +44 1793 831818

Ireland Tel (Free): 1-800 709 009
Email: pb.sales@wilsontool.eu.com

Wilson Tool - Germany

Tel: +49 5723 747 0
Email: verkauf@wilsontool.eu.com

Toolspress - Italy

Tel: +39 0521 850510 / 850677
Fax: +39 0521 850796
Email: sales@toolspress.com



V4. December 2025

© 2025 Wilson Tool International



Wilson Tool International | wilsontool.com | pb.sales@wilsontool.eu.com